
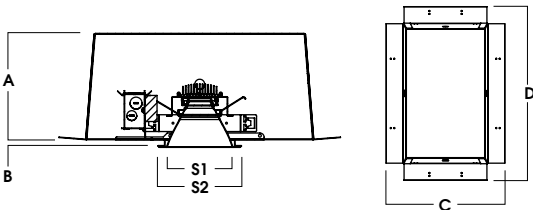
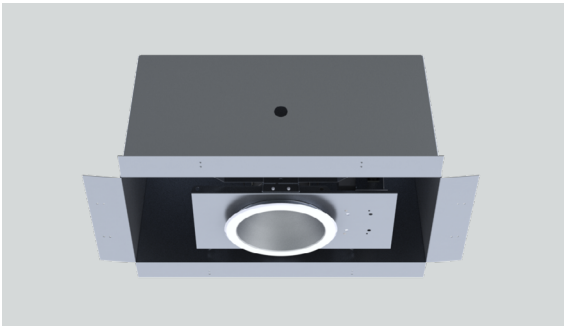


6" FIRE PRO - FIRE RATED DOWNLIGHT
OS SERIES / 2000 LUMENS MAX

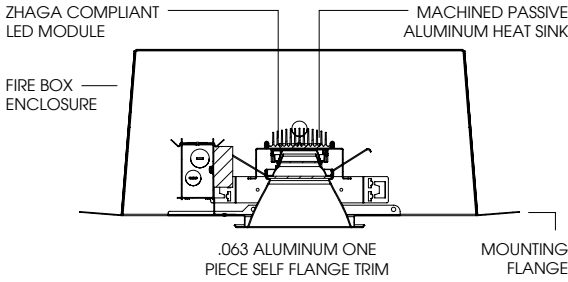

A	B	C	D	S1	S2
9.5	.625	17.2	25.1	6.0	7.5
241.3 mm	15.9 mm	436.9 mm	637.5 mm	152.4 mm	190.5 mm

FPE6LEDOS - TRIM FLANGE / NON-IC RATED

APPLICATION

Fire Pro 6" LED recessed open aperture downlight for fire rated ceilings.

FEATURES

60 minutes rated firebox enclosure. Two-stage optical system for smooth light distribution. Zhaga International Standard LED module for ease of maintenance and replacement. Tool-less LED module, driver and J-Box access. Multi-Bar mounting brackets. Posi-lock trim retention torsion springs. Integral 0.625" collar.

TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available.

Matte white flange is standard.

ELECTRONICS

LED module features high brightness white Osram LEDs. 3-step MacAdam Ellipse binning and CRI 84 minimum. Full range of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Housing / frame constructed of #20 ga. galvanized steel. Self-flanged one piece trim spun from 0.063" high purity aluminum and finished to specification. Extruded and machined 6063-H32 aluminum heatsink. T.I.M. gasket for optimal thermal management.

CODE COMPLIANCE

ASTM E119-05a, UL 263, UBC 7-1, NFPA 251, ANSI A2.1. Certified by Omega Point Laboratories. Certified by Intertek and Warnock Hersey. BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. LM79/LM80/TM21 data available. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE / LUMENS DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
FPE6LEDOS10L	1100	1033	11	99
FPE6LEDOS15L	1500	1205	13	91
FPE6LEDOS20L	2000	1685	20	84

SERIES	LUMENS ¹	CCT	DRIVER / VOLTAGE ³	OPTIONS ⁴	FIREBOX	TRIM	FINISH ⁶	TRIM OPTIONS	
FPE6LEDOS	10L	1100 Lm	E Electronic Driver 1% ELV/MLV, 120V DS2W1 DO10 DS10 1% 0-10V	1 120V 2 277V	H12 12" - 24" Expandable Bars FS Fusing CR Corrosion Resistant PR ⁸ Deep Ceiling Extension GR Goof Ring AMB Anti-Microbial Finish	FB2012 60 Minutes Rated Enclosure	AR6223OS	SO ⁹ Micro Prism Solite™ Lens GL Clear Glass Lens FG Frosted Glass Lens GS Gasket WL Wet Location PF ¹⁰ Polished Flange AMB Anti-Microbial Finish	
	15L	1500 Lm							MB Matte Black SG Semi-Diffuse
	20L	2000 Lm							HZ Haze Full Diffuse PT Platinum Silver BZ Bronze OB Oil Rubbed Bronze CH Charcoal AS Anodic Sapphire AN Anodic Natural AC Anodic Champagne AZ Anodic Bronze AK Anodic Black AM Anodic Malachite SN Sun Gold CO Copper Metallic GH Graphite CC ⁸ Custom Color

EXAMPLE: FPE6LEDOS10L35KE1/FB2012/AR6223OSMWSO

NOTES:
1 Nominal Source Lumens at 35K 2 Delivered Lumens at 35K with E1-AR6223OS-MW-SO 3 Contact Factory for Additional Options 4 See Product Options Page for Details 5 Contact Factory 6 Inside Trim And Flange Will Match Color Specified 7 Standard Finish 8 Contact Factory for Special Finishes 9 Standard Lens 10 Flange and Reflector Same Finish



PROJECT: _____
TYPE: _____



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.