



**HALF MOON**  
DAMP LOCATION  
GLOBO SERIES

PROJECT: \_\_\_\_\_  
QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_



HP1200GV  
PT - Platinum Silver



HP1200GV  
MB - Matte Black



HP1200GV  
CO - Copper Metallic



HP1200GV  
MW - Matte White

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING <sup>2</sup>	MOUNTING <sup>5</sup>	FINISH <sup>9</sup>
HP1200GV	15L 1500 Lm	27K 2700K	EX <sup>3</sup> Electronic Driver, 120V/277V DS2W1 <sup>3</sup> ELV / MLV, 120V DO10X <sup>4</sup> 1%, 0-10V, 120V/277V	WALL MOUNT	MW <sup>9</sup> Matte White MB <sup>9</sup> Matte Black PT <sup>9</sup> Platinum Silver CC Custom Color
	27L 2700 Lm	30K 3000K 35K 3500K 40K 4000K		CP104 <sup>3/6</sup> Small Driver Canopy CP106 <sup>4/6</sup> Large Driver Canopy PA_ <sup>7</sup> Mounting Arm Style SP90_ <sup>7</sup> Straight Arm	
				CEILING MOUNT	
				RDC5 <sup>3/4</sup> Round Driver Canopy HM_ <sup>8</sup> Hang Straight Pendant AT_ <sup>8</sup> Hang Straight All Thread PM_ <sup>8</sup> Pendant/Straight Mount CD_ <sup>8</sup> Cord / Cable Mount CM_ <sup>8</sup> Cord Mount	

EXAMPLE: HP1200GV27L30KDO10X/RDC5HM36MW

**NOTES:**  
 1 Nominal Source Lumens At Any CCT    2 Contact Factory for Additional Options    3 CP104/RDC5 for EX/DS2W1 Drivers    4 CP106/RDC5 for DO10X Drivers  
 5 See Mounting Page for Details on Components and Finishes    6 Contact Factory for Knock Out Holes    7 See Mounting Page for Available Arm Options  
 8 Specify Length in Inches: See Mounting Page for Available Lengths    9 Reference Color Sheet Located on Product Webpage for Full List of Available Colors    10 Standard Finishes






**HALF MOON**  
DAMP LOCATION  
GLOBO SERIES

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS <sup>1</sup>	DELIVERED LUMENS <sup>2</sup>	SYSTEM WATTS	LPW
HP1200GV15L	1500	1037	10	104
HP1200GV27L	2700	1810	18	101

**NOTES:**  
1 Nominal Source Lumens at 35K 2 Nominal Delivered Lumens at 35K

HOUSING DIMENSIONS



A
12.0
304.8 mm

**APPLICATION**

Half Moon fixture for area lighting. GV Series is designed for damp or dry locations.

**FEATURES**

SpecLume series fixtures offer contemporary style with functional luminaire performance. All fixtures are designed and manufactured in our factory. Classic stepped fitter. Driver mounted in RDC5 ceiling canopy. Wide range of combinations for illumination, mounting and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement.

**FINISH**

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available.

**ELECTRONICS**

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

**CONSTRUCTION**

Fixture shades are spun in our factory from 0.040 high purity aluminum. Globe is seamless formed .125 white opal acrylic.


**CODE COMPLIANCE**

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

**WALL MOUNT**

(SEE MOUNTING PAGES FOR MORE OPTIONS & DIMENSIONS.)

**PA\_**  
MOUNTING ARM STYLE

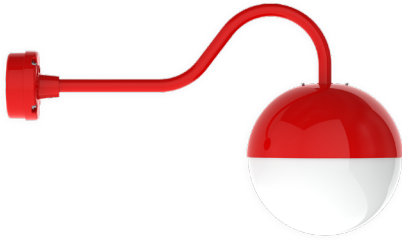

HP1200GV SHOWN WITH CP104PA23

**CEILING MOUNT**

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

**HM / AT / PM**  
HANG STRAIGHT / ALL THREAD / PENDANT



HP1200GV SHOWN WITH RDC5PM

**CD**  
CORD / CABLE MOUNT



HP1200GV SHOWN WITH RDC5CD

**CM**  
CORD MOUNT



HP1200GV SHOWN WITH RDC5CM






**HALF MOON**  
**DAMP LOCATION**  
**GLOBO SERIES / PHOTOMETRIC DATA**

**DECORATIVE**

HP1200GV-27L-35K-EX

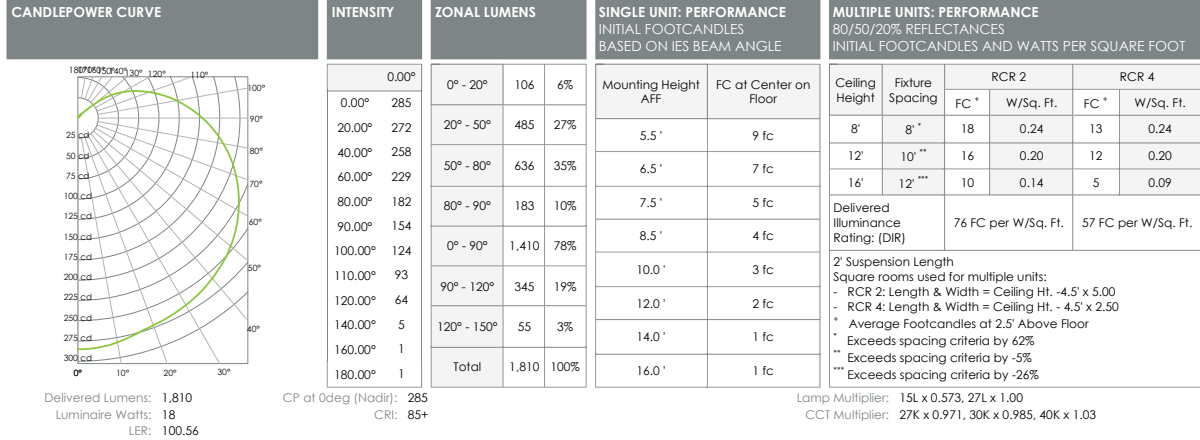

# MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.  
NOTE: THIS IS TYPICAL OF SPECLUME SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



## WALL MOUNTING

**CP104 - SMALL DRIVER CANOPY (STANDARD)**  
MAY BE USED AS SPLICE BOX FOR DIRECT FEED

Ø 5.5  
4.0

CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY. ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.

**PA15** 15.0  
9.8 8.3

**PA17** 17.0  
7.0

**PA24** 15.0 9.5  
18.0 24.0

**PA32** 32.6  
19.5 30.0

**PA16 - Front Wall Mount**  
15.0 13.0  
25.0

**PA22** 22.0 12.5  
7.5 5.0

**PA26** 28.5 12.7

**PA36** 36.0 7.0

**PA16F - Back Wall Mount**  
20.0 13.0  
25.0

**PA23** 23.0 7.0

**SP90(xx)**  
Designed for Straight Arm Mounting  
SPECIFY LENGTH

EXAMPLE: SP9024 - STRAIGHT PIPE 24" LONG

**PA48** 48.0 7.0

**PA23(xx)**  
SPECIFY LENGTH 7.0

EXAMPLE: PA2330 - 30" PA23

**PA90 (Wxx) (Dxx)**  
SPECIFY LENGTH (Wxx)  
SPECIFY DROP (6.5 Minimum) (Dxx)

EXAMPLE: PA90W20D07 - 90° PIPE 20 LONG 7" DEEP THREADED AT FIXTURE END

## CEILING MOUNTING

<p><b>RDC5 - SMALL DRIVER CANOPY (STANDARD)</b> MOUNTS TO 4" OCTO J-BOX</p> <p>Ø 5.3 2.5</p>	<p><b>HM*</b> HANG STRAIGHT 45° SWIVEL 1/2" STEM - 3/8" NPT</p> <p>ORDER: <b>HM</b> (Length) SPECIFY LENGTH: HM3 - 3" HM24 - 24" HM6 - 6" HM36 - 36" HM12 - 12" HM48 - 48" HM18 - 18" HM72 - 72" <b>HMLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>AT**</b> HANG STRAIGHT ALL THREAD 45° SWIVEL 1/2" STEM - 1/4" IP</p> <p>ORDER: <b>AT</b> (Length) SPECIFY LENGTH: AT12 - 12" AT48 - 48" AT24 - 24" AT60 - 60" AT36 - 36" AT72 - 72"</p> <p><small>FIELD CUT THREADED PIPE TO LENGTH REQUIRED CLIP PIPE COUPLER 3/4" SHORTER THAN THREADED PIPE SLIP PIPE COUPLER OVER THREADED PIPE</small></p>	<p><b>PM*</b> RIGID PENDANT MOUNT RIGID 1/2" STEM - 3/8" NPT</p> <p>0°</p> <p>ORDER: <b>PM</b> (Length) SPECIFY LENGTH: PM3 - 3" PM24 - 24" PM6 - 6" PM36 - 36" PM12 - 12" PM48 - 48" PM18 - 18" PM72 - 72" <b>PMLLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>CD</b> CORD / CABLE MOUNT SJ CORD WITH 1/16 SS CABLE</p> <p>ADJUST AND LOCKS</p> <p>ORDER: <b>CD</b> (Length) SPECIFY LENGTH: CD36 - 36" CD72 - 72" CD144 - 144" <b>CDLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>CM</b> CORD MOUNT SJ CORD WITH STRAIN RELIEF</p> <p>ORDER: <b>CM</b> (Length) SPECIFY LENGTH: CM36 - 36" CM72 - 72" CM144 - 144" <b>CMLC(XX)</b> Custom Length (Specify in Inches)</p>
--	--	---	--	--	--

\*MAXIMUM ONE PIECE STEM LENGTH IS 72". \*\*MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.  
\*\*ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT