




**TIP TOP PENDANT**  
**DAMP LOCATION**  
 DOMO SHADES

PROJECT: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

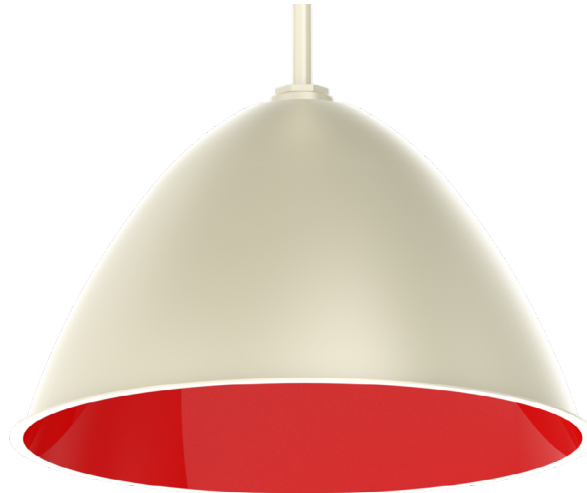

TT1811GV  
 AL - Almond  
 RDI - Red Baron Interior



TT1811GV  
 MB - Matte Black  
 MWI - Matte White Interior



TT1811GV  
 PT - Platinum Silver  
 FCI - Fixture Color Interior



TT1811GV  
 MW - Matte White  
 FCI - Fixture Color Interior

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING <sup>2</sup>	MOUNTING <sup>6</sup>	CORD OPTIONS	INTERIOR <sup>10</sup>	FINISH <sup>10</sup>
TT1811GV	15L	1500 Lm	27K	2700K	STANDARD CORDS <b>CW</b> White <b>CB</b> Black <b>CS</b> Silver DECORATIVE CORDS <sup>9</sup> See Page 4 for Decorative Braided Color Cords	<b>MWI</b> <sup>11</sup> Matte White <b>CCI</b> <sup>11</sup> Custom Color <b>FCI</b> <sup>11</sup> Fixture Color Interior	<b>MW</b> <sup>11</sup> Matte White <b>MB</b> <sup>11</sup> Matte Black <b>PT</b> <sup>11</sup> Platinum Silver <b>CC</b> <sup>11</sup> Custom Color
	27L	2700 Lm	30K	3000K			
	37L	3700 Lm	35K	3500K			
	55L	5500 Lm	40K	4000K			
<b>EX</b> <sup>3</sup> Electronic Driver, 120V/277V <b>DO10X</b> <sup>3</sup> 1%, 0-10V, 120V/277V ELV / MLV;120V <b>DS2W1</b> <sup>3</sup> Lutron® 2-Wire Forward Phase (MLV), 120V <b>DLTE1</b> <sup>3</sup> Lutron® EcoSystem®, 1%, Lutron® EcoSystem®, Fades to Black, 120V/277V <b>DL3EX</b> <sup>3</sup>				<b>RDC5</b> <sup>3/4</sup> Small Driver Canopy <b>CP13</b> <sup>4/5</sup> Large Driver Canopy <b>HM</b> <sup>7</sup> Hang Straight <b>AT</b> <sup>7</sup> Hang Straight All Thread <b>PM</b> <sup>7</sup> Rigid Pendant Mount <b>CD</b> <sup>7</sup> Cord / Cable Mount <b>CM</b> <sup>7</sup> Cord Mount <b>EMCR</b> <sup>8</sup> 10W Canopy Mounted EM <b>EMRM</b> 7W Remote EM <b>EMEN</b> 7W Remote with Enclosure			

EXAMPLE: TT1811GV55L35KEX/RDC5HM72MWIMW

**NOTES:**  
 1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 RDC5 for EX/DO10X Drivers 4 37L Max with RDC5, 55L Max with CP13 5 CP13 for Lutron Drivers  
 6 See Mounting Page for Details on Components and Finishes 7 Specify Length in Inches: See Mounting Page for Available Lengths 8 EMCR Replaces RDC5 or CP13  
 9 Decorative Cord 120" Max Length 10 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 11 Standard Finishes






# TIP TOP PENDANT DAMP LOCATION DOMO SHADES

DECORATIVE

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS <sup>1</sup>	DELIVERED LUMENS <sup>2</sup>	SYSTEM WATTS	LPW
TT1811GV15L	1500	1074	10	107
TT1811GV27L	2700	1877	18	104
TT1811GV37L	3700	2757	26	106
TT1811GV55L	5500	4054	39	104

<sup>1</sup> Nominal Source Lumens at 35K    <sup>2</sup> Nominal Delivered Lumens at 35K

## HOUSING DIMENSIONS

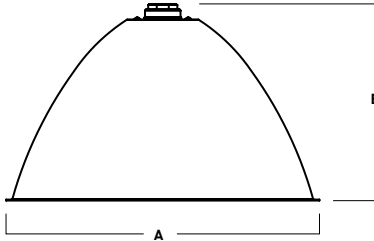

A	B
18.4 467.4 mm	11.6 294.6 mm

### APPLICATION

Tip Top Pendant offers a clean design for decorative lighting.

### FEATURES

SpecLume series fixtures offer contemporary style with functional luminaire performance. Passive integral heat sink. LED module and drivers are replaceable and upgradable. Standard diffuser for visual comfort and to eliminate LED source visibility. A variety of mounting options are available.

### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes. Interior is Matte White unless specified. Custom Color interior finish available.

### ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

### CONSTRUCTION

Fixtures are spun in our factory from 0.063 high purity aluminum. Passive machined aluminum heat sink for optimal thermal management.

### CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

## CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

### HM / AT / PM

HANG STRAIGHT / ALL THREAD / PENDANT



TT1811GV SHOWN WITH RDC5PM

### CD

CORD / CABLE MOUNT



TT1811GV SHOWN WITH RDC5CD

### CM

CORD MOUNT



TT1811GV SHOWN WITH RDC5CM





# TIP TOP PENDANT


## DAMP LOCATION

### DOMO SHADES / PHOTOMETRIC DATA

DECORATIVE

TT1811GV-55L-35K-EX-MWI-PT-TF2

**CANDLEPOWER CURVE**



Delivered Lumens: 4,052  
 Luminaire Watts: 39  
 LER: 103.90

INTENSITY	0.00°
0.00°	1,710
5.00°	1,699
10.00°	1,678
15.00°	1,655
20.00°	1,616
30.00°	1,452
40.00°	1,266
50.00°	1,040
60.00°	385
70.00°	142
80.00°	63
90.00°	0

CP of 0deg (Nadir): 1,710  
 CRI: 85+

ZONAL LUMENS	0° - 10°	0° - 20°	0° - 30°	0° - 40°	0° - 60°	0° - 80°	0° - 90°	Total
	164	630	1,338	2,184	3,704	4,028	4,052	4,052
	4%	16%	33%	54%	91%	99%	100%	100%

SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE			
Mounting Height AFF	FC at Center on Floor	Beam Diameter	FC at Beam Edge
6.0'	48 fc	16.0'	17 fc
8.0'	27 fc	21.3'	9 fc
10.0'	17 fc	26.6'	6 fc
12.0'	12 fc	32.0'	4 fc
14.0'	9 fc	37.3'	3 fc
16.0'	7 fc	42.6'	2 fc
20.0'	4 fc	53.3'	1 fc
24.0'	3 fc	63.9'	1 fc

Beam Angle: 106.26  
 Spacing Ratio: 1.25

MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT					
Ceiling Height	Fixture Spacing	RCR 2		RCR 4	
		FC *	W/Sq. Ft.	FC *	W/Sq. Ft.
14'	12'	27	0.28	22	0.28
18'	14'	21	0.21	11	0.14
22'	16'	12	0.13	14	0.18
Delivered Illuminance Rating: (DIR)		97 FC per W/Sq. Ft.		78 FC per W/Sq. Ft.	
2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor * Exceeds spacing criteria by 1% ** Exceeds spacing criteria by -17% *** Exceeds spacing criteria by -27%					

Lamp Multiplier: 15L x 0.265, 27L x 0.463, 37L x 0.68  
 CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03



# MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.  
NOTE: THIS IS TYPICAL OF SPECULUME SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



## CEILING MOUNTING

<p><b>RDC5</b> - SMALL DRIVER CANOPY (STANDARD) MOUNTS TO 4" OCTO J-BOX</p> <p><b>CP13</b> - LARGE DRIVER CANOPY</p>	<p><b>HM*</b> HANG STRAIGHT 45° SWIVEL 1/2" STEM - 3/8" NPT</p> <p>ORDER: <b>HM</b> (Length) SPECIFY LENGTH: HM3 - 3"    HM24 - 24" HM6 - 6"    HM36 - 36" HM12 - 12"    HM48 - 48" HM18 - 18"    HM72 - 72" <b>HMLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>AT**</b> HANG STRAIGHT ALL THREAD 45° SWIVEL 1/2" STEM - 1/4" IP</p> <p>ORDER: <b>AT</b> (Length) SPECIFY LENGTH: AT12 - 12"    AT48 - 48" AT24 - 24"    AT60 - 60" AT36 - 36"    AT72 - 72" <small>FIELD-CUT THREADED PIPE FIELD-CUT HESSE CUT PIPE COVER - 1/4" SHORTER THAN THREADED PIPE SLIP PIPE COVER OVER THREADED PIPE</small></p>	<p><b>PM*</b> RIGID PENDANT MOUNT RIGID 1/2" STEM - 3/8" NPT</p> <p>ORDER: <b>PM</b> (Length) SPECIFY LENGTH: PM3 - 3"    PM24 - 24" PM6 - 6"    PM36 - 36" PM12 - 12"    PM48 - 48" PM18 - 18"    PM72 - 72" <b>PMLLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>CD</b> CORD / CABLE MOUNT SJ CORD WITH 1/16 SS CABLE</p> <p>ORDER: <b>CD</b> (Length) SPECIFY LENGTH: CD36 - 36" CD72 - 72" CD144 - 144" <b>CDLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>CM</b> CORD MOUNT SJ CORD WITH STRAIN RELIEF</p> <p>ORDER: <b>CM</b> (Length) SPECIFY LENGTH: CM36 - 36" CM72 - 72" CM144 - 144" <b>CMLC(XX)</b> Custom Length (Specify in Inches)</p>
--	--	---	--	--	--

\*MAXIMUM ONE PIECE STEM LENGTH IS 72". \*\*MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.  
\*\*ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT

## EMERGENCY BATTERY OPTIONS

**EMCR** - LARGE DRIVER CANOPY FOR  
10W EMERGENCY BATTERY  
(FOR ROUND CEILING MOUNT TYPES)

## REMOTE EMERGENCY BATTERY OPTIONS

<p><b>EMRM*</b> - 7W REMOTE EMERGENCY BATTERY (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>1.3</td> <td>12.6</td> <td>13.0</td> </tr> </tbody> </table>	A	B	C	1.3	12.6	13.0	<p><b>EMEN*</b> - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>2.0</td> <td>17.0</td> <td>6.2</td> </tr> </tbody> </table>	A	B	C	2.0	17.0	6.2
A	B	C											
1.3	12.6	13.0											
A	B	C											
2.0	17.0	6.2											

\*OTHER EM BATTERY SIZES AVAILABLE, CONSULT FACTORY

## CORD OPTIONS

STANDARD VINYL CORDS

DECORATIVE BRAIDED COLOR CORDS

