




**12" / 16" CLASSIC LINE
SURFACE LIGHT**
GV SERIES / 3700 LUMENS

PROJECT: _____
QUANTITY: _____ TYPE: _____

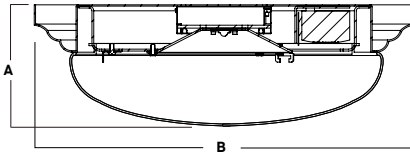

SERIES	A	B
SX1205RDLEDGV	4.4	13.2
SX1605RDLEDGV	4.4	16.3

SX1205RDLEDGV, SX1605RDLEDGV

APPLICATION

Classic Line 12" and 16" diameter decorative surface light series.

FEATURES

Speculume series fixtures offer contemporary style with functional luminaire performance. Fixtures are designed and manufactured in our factory. No visible hardware. LED module and driver are upgradable and replaceable. Integral MW motion/photo sensor available. Circuit wiring available. Optional decorative center finial.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 85+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixtures are spun in our factory from .063 high purity aluminum. Passive aluminum heatsink for optional thermal management. Formed UV stabilized opal white acrylic diffuser.

CODE COMPLIANCE

BAA Compliant. ETL certified to meet US and Canadian standards. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE			
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS ¹	SYSTEM WATTS
SX1605RDLEDGV15L	SX1605RDLEDGV14W	1500	9
SX1605RDLEDGV27L	SX1605RDLEDGV26W	2700	16
SX1605RDLEDGV37L	SX1605RDLEDGV37W	3700	23



MW - Matte White

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²	OPTIONS ³	MOUNTING ⁵	DIFFUSER	FINISH ⁸
SX1205RDLEDGV	15L 1500 Lm	27K 2700K 30K 3000K 35K 3500K 40K 4000K	EX Electronic Driver, 120V/277V DO10X 1%, 0-10V, 120V/277V DS2W1 1%, ELV/MLV, 120V DLTE1 1% Lutron 2-wire Forward Phase(MLV), 120V DL3EX 1%, Lutron® EcoSystem®, 120V/277V	FS Fuse Holder and Fuse GS Ceiling Level Gasket USR Universal MW Motion/ Light Sensor TMB Thumb Screws 2CIR⁴ 2 Circuit	SM Surface Mount HM⁶ Hang Mount PM⁶ Pendant Mount	OP White Opal Acrylic POP White Opal Polycarbonate FIN Decorative Center Finial to Match Edge Finish	MW⁷ Matte White MB⁷ Matte Black PT⁷ Platinum Silver CC Custom Color
SX1605RDLEDGV	15L 1500 Lm 27L 2700 Lm 37L 3700 Lm						

EXAMPLE: SX1205RDLEDGV15L35KEXSMOPMW

NOTES:
1 Nominal Source Lumens at 3500K 2 Contact Factory for Additional Options 3 See Product Options for Details 4 37L Max 5 See Mounting Page for Details on Components and Finishes 6 Specify Length in Inches: See Mounting Page for Available Lengths 7 Standard Finishes 8 Reference Color Sheet Located on Product Webpage for Full List of Available Colors/Consult Factory for Special Finishes

