



POMME
DAMP LOCATION
CAFÉS

PROJECT: _____
 QUANTITY: _____ TYPE: _____



SD1208GV
 GB - Gloss Black
 MWI - Matte White Interior



SD1208GV
 MB - Matte Black
 GBI - Gloss Black Interior



SD1208GV
 AS - Anodic Sapphire
 MWI - Matte White Interior



SD1208GV
 SN - Sun Gold
 MBI - Matte Black Interior

| SERIES | LUMENS ¹ | CCT | DRIVER / DIMMING ² | ACCESSORIES | MOUNTING ⁴ | INTERIOR ⁸ | FINISH ⁹ |
|----------|---------------------|-----------|--|---|--|--|---|
| SD1208GV | 15L 1500 Lm | 27K 2700K | EX Electronic Driver, 120V/277V ELV/MLV, 120V DO10X 1%, 0-10V, 120V/277V | FJO ³ 2" Frosted Tall MFO 2" Frosted Mini | WALL MOUNT | MWI ⁹ Matte White CCI Custom Color FCI Fixture Color Interior | MW ⁹ Matte White PT ⁹ Platinum Silver CC Custom Color |
| | | 30K 3000K | | | CP104 ⁵ Small Driver Canopy | | |
| | | 35K 3500K | | | CPG/RMD Remote Mount Driver | | |
| | | 40K 4000K | | | PA ⁶ Mounting Arm Style | | |
| | | | | | SP90 ⁶ Straight Arm | | |
| | | | | | CEILING MOUNT | | |
| | | | | | RDC5 Small Driver Canopy | See Page 5 for Full Range of Color Options (83-90082) | See Page 5 for Full Range of Color Options (83-90082) |
| | | | | | HM ⁷ Hang Straight | | |
| | | | | | AT ⁷ Hang Straight All Thread | | |
| | | | | | PM ⁷ Rigid Pendant Mount | | |
| | | | | | CD ⁷ Cord / Cable Mount | | |
| | | | | | CM ⁷ Cord Mount | | |

EXAMPLE: SD1208GV15L35KEXFJO/RDC5PM24MWIMW

NOTES:
 1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 Standard Enclosure 4 See Mounting Page for Details on Components and Finishes
 5 Contact Factory for Knock Out Holes 6 See Mounting Page for Available Arm Options 7 Specify Length in Inches: See Mounting Page for Available Lengths
 8 See Color Page for More Options/Consult Factory for Special Finishes 9 Standard Finishes






POMME
DAMP LOCATION
CAFÉS

DECORATIVE

| LUMENS / WATTAGE DATA | | | | |
|-----------------------|----------------------------|-------------------------------|--------------|-----|
| PART NUMBER | SOURCE LUMENS ¹ | DELIVERED LUMENS ² | SYSTEM WATTS | LPW |
| SD1208GV15L | 1500 | 1002 | 11 | 91 |

¹ Nominal Source Lumens at 35K ² Nominal Delivered Lumens at 35K

HOUSING DIMENSIONS



| A | B |
|-----------------|-----------------|
| 9.6 243.8 mm | 8.6 218.4 mm |

APPLICATION

The Cafés offer a playful variety of fixture shapes. GV products are designed for damp or dry locations.

FEATURES

Speculume series fixtures offer contemporary style with functional luminaire performance. Passive integral heat sink. LED module and drivers are replaceable and upgradable. Standard diffuser for visual comfort and to eliminate LED source visibility. A variety of mounting options are available.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes. Interior is Matte White unless specified. Custom Color interior finish available.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixtures are spun in our factory from 0.063 high purity aluminum. Die-cast aluminum heat sink for optimal thermal management. Low profile frosted diffuser over LEDs to eliminate direct source visibility.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

SERIES SIZES

SD1208GV



WALL MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & DIMENSIONS.)

PA_
MOUNTING ARM STYLE



SD1208GV SHOWN WITH CP104PA23

CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM
HANG STRAIGHT / ALL THREAD / PENDANT



SD1208GV SHOWN WITH RDC5PM

CD
CORD / CABLE MOUNT



SD1208GV SHOWN WITH RDC5CD

CM
CORD MOUNT



SD1208GV SHOWN WITH RDC5CM





POMME
DAMP LOCATION
 CAFÉS / PHOTOMETRIC DATA

SD1208GV 15L 35K XX MF0 XX MWI

| CANDLEPOWER CURVE TEST SP-00981 | INTENSITY CANDELA 0° AZIMUTH | ZONAL LUMENS | | SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE | | | | MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT | | | | | | | | |
|------------------------------------|------------------------------------|--------------|---------------------|--|---------------------------|-----------------------------|-------------------|--|-------------------|--|-------|---------------------|-------|---------------------|------|--|
| | | 0° - 10° | 39 | 4% | Mounting Height AFF | FC at Center on Floor | Beam Diameter | FC at Beam Edge | Ceiling Height | Fixture Spacing | RCR 2 | | RCR 4 | | | |
| | 0.00° | 0.00° | 0° - 10° | 39 | 4% | 6.5' | 10 fc | 15.8' | 4 fc | 9' | 6' | 20 | 0.23 | 16 | 0.23 | |
| | 0.00° | 405 | 0° - 20° | 150 | 15% | 7.5' | 7 fc | 18.3' | 3 fc | 12' | 8' | 13 | 0.15 | 7 | 0.10 | |
| | 5.00° | 405 | 0° - 30° | 325 | 32% | 8.5' | 6 fc | 20.7' | 2 fc | 16' | 10' | 9 | 0.10 | 7 | 0.10 | |
| | 10.00° | 400 | 0° - 40° | 547 | 55% | 10.0' | 4 fc | 24.3' | 2 fc | Delivered Illuminance Rating: (DIR) | | 85 FC per W/Sq. Ft. | | 68 FC per W/Sq. Ft. | | |
| | 15.00° | 394 | 0° - 60° | 894 | 89% | 12.0' | 3 fc | 29.2' | 1 fc | 1' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 3.5' x 5.00 - RCR 4: Length & Width = Ceiling Ht. - 3.5' x 2.50 * Average Footcandles at 2.5' Above Floor | | | | | | |
| | 20.00° | 387 | 0° - 80° | 993 | 99% | 14.0' | 2 fc | 34.1' | 1 fc | | | | | | | |
| | 30.00° | 368 | 0° - 90° | 1,002 | 100% | 16.0' | 2 fc | 39.0' | 1 fc | | | | | | | |
| | 40.00° | 336 | Total | 1,002 | 100% | 20.0' | 1 fc | 48.7' | 0 fc | | | | | | | |
| | 250 cd | 213 | CP at 0deg (Nadir): | 405 | Beam Angle: | 101.2 | Lumen Multiplier: | N/A | | | | | | | | |
| | 300 cd | 92 | Luminaire Watts: | 11 | Spacing Ratio: | 1.35 | CCT Multiplier: | 27K x 0.97, 30K x 0.99, 40K x 1.03 | | | | | | | | |
| | 350 cd | 46 | LER: | 91.09 | | | | | | | | | | | | |
| | 400 cd | 19 | | | | | | | | | | | | | | |
| 90.00° | 1 | | | | | | | | | | | | | | | |



MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.
NOTE: THIS IS TYPICAL OF SPECLUME SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



WALL MOUNTING

CP104 - SMALL DRIVER CANOPY (STANDARD)
MAY BE USED AS SPLICE BOX FOR DIRECT FEED

CP6/RMD - REMOTE MOUNT DRIVER
MOUNTS DIRECTLY TO WALL OR OCTAGON STYLE J-BOX

CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY. ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.

PA15 15.0
9.8 8.3

PA17 17.0
7.0

PA24 15.0 9.5
18.0 24.0

PA32 32.6
19.5 30.0
32.2

PA16 - Front Wall Mount
15.0 13.0
25.0

PA22 22.0 12.5
7.5 5.0

PA26 28.5 12.7

PA16F - Back Wall Mount
20.0 13.0
25.0

PA23 23.0 7.0

SP90(XX)
Designed for Straight Arm Mounting
SPECIFY LENGTH

EXAMPLE: SP9024 - STRAIGHT PIPE 24" LONG

PA36 36.0 7.0

PA23(XX)
SPECIFY LENGTH 7.0

EXAMPLE: PA2330 - 30" PA23

PA90 (Wxx)(Dxx)
SPECIFY LENGTH (Wxx)
SPECIFY DROP (6.5 Minimum) (Dxx)

EXAMPLE: PA90W20D07 - 90° PIPE 20 LONG 7" DEEP THREADED AT FIXTURE END

PA48 48.0 7.0

PA901212 12.0 12.0

CEILING MOUNTING

RDC5 - SMALL DRIVER CANOPY (STANDARD)
MOUNTS TO 4" OCTO J-BOX

HM*
HANG STRAIGHT
45° SWIVEL 1/2" STEM - 3/8" NPT

ORDER: **HM** (Length)
SPECIFY LENGTH:
HM3 - 3" HM24 - 24"
HM6 - 6" HM36 - 36"
HM12 - 12" HM48 - 48"
HM18 - 18" HM72 - 72"
HMLC(XX)
Custom Length
(Specify in Inches)

AT**
HANG STRAIGHT ALL THREAD
45° SWIVEL 1/2" STEM - 1/4" IP

ORDER: **AT** (Length)
SPECIFY LENGTH:
AT12 - 12" AT48 - 48"
AT24 - 24" AT60 - 60"
AT36 - 36" AT72 - 72"

FIELD CUT THREADED PIPE TO LENGTH NEEDED
CUT PIPE COVER 2 1/8" SHORTER
TRIM THREADED PIPE
SLIP "PIPE COVER" OVER THREADED PIPE

PM*
RIGID PENDANT MOUNT
RIGID 1/2" STEM - 3/8" NPT

ORDER: **PM** (Length)
SPECIFY LENGTH:
PM3 - 3" PM24 - 24"
PM6 - 6" PM36 - 36"
PM12 - 12" PM48 - 48"
PM18 - 18" PM72 - 72"
PMLLC(XX)
Custom Length
(Specify in Inches)

CD
CORD / CABLE MOUNT
SJ CORD WITH 1/16 SS CABLE

ORDER: **CD** (Length)
SPECIFY LENGTH:
CD36 - 36"
CD72 - 72"
CD144 - 144"
CDLC(XX)
Custom Length
(Specify in Inches)

CM
CORD MOUNT
SJ CORD WITH STRAIN RELIEF

ORDER: **CM** (Length)
SPECIFY LENGTH:
CM36 - 36"
CM72 - 72"
CM144 - 144"
CMLC(XX)
Custom Length
(Specify in Inches)

*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.
**ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

| FIXTURE COLOR | STANDARD CORD COLOR | STANDARD CANOPY / STEM COLOR |
|--|---------------------|------------------------------|
| Matte White, Textured White | Matte White | Matte White |
| Gloss White | Matte White | Gloss White |
| Matte Black, Gloss Black, Textured Black | Matte Black | Matte Black |
| All Others | Matte Black | Same Color as Fixture |
| Custom Color | Contact Factory | Contact Factory |

PAINT TIMES

| TIER | COST | AVERAGE PAINT TIME* |
|---------------------------------|-----------------|---------------------|
| Tier 1 - Standard Finishes | \$ | ⓪ |
| Tier 2 - Typical Finishes | \$\$ | ⓪⓪ |
| Tier 3 - Special Metal Finishes | \$\$\$ | ⓪⓪⓪ |
| Custom Color | Contact Factory | Contact Factory |

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES


TIER 1 - STANDARD FINISHES



TIER 2 - TYPICAL FINISHES



TIER 3 - SPECIAL METAL FINISHES

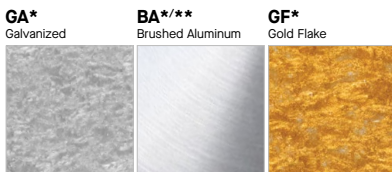

CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

**UNAVAILABLE FOR INTERIOR

