



# 3.5" MINI ROUND VERSA LIGHT

recessed fixtures

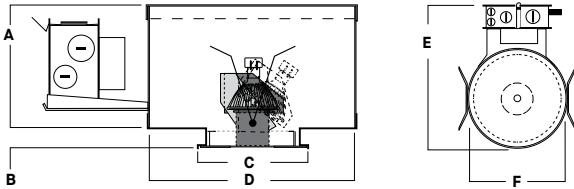

PROJECT: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

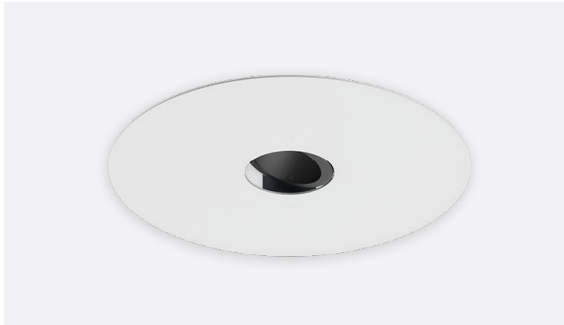

A	B	C	D	E	F
4.7 120.6 mm	0.625 19.0 mm	4.5 114.3 mm	8.0 203.2 mm	12.0 304.8 mm	8.0 203.2 mm

## SGDG4PZ

### APPLICATION

3.5" Versa light MR16 for Flush fit plaster installation.

### FEATURES

Efficient reflector design optimized for MR16 LED lamps (sold by others). Lamp rotates / locks 360°, lamp tilts / locks 45°. Integral 5/8" (0.625") plaster ring. Tool-less access for ease of maintenance. Multi-bar adjustable mounting brackets.

### TRIM FINISH

Variety of powdercoat and anodized finishes available on trim.

### ELECTRONICS

120V Electronic transformer is standard.

### CONSTRUCTION

Frame constructed of 20 ga. aluminum. Trim spun from .063" high purity aluminum and finished to specification.

### CODE COMPLIANCE

ETL listed for damp locations. Manufactured and tested to UL Standard No. 1598.

AR3200SAPHZ



2.0 ø

AR3200SASLPZ



1.1 x 2.1

PZ4RP FITTER WITH  
PLASTER MESH



TRIM ROTATION  
AFTER INSTALLATION



## PRODUCT SELECTOR GUIDE

SERIES	DIMMING	OPTIONS	BAR HANGERS	TRIM	FINISH	FLANGE	LENS
SGDG4PZ							

### EXAMPLE

SGDG4PZ	E1		BH27	AR3200SAPHZ	SG	MF	SO
---------	----	--	------	-------------	----	----	----

### HOUSING

### MOUNTING OPTIONS

### TRIM OPTIONS

SERIES	DIMMING	OPTIONS	BAR HANGERS	TRIM	FINISH	LENS		
SGDG4PZ	E1	Electronic, 120V	<b>CR</b> Corrosion Resistant <b>TR</b> Top Relamping Option	BH27	27" Solid Bars	<b>AR3200</b> <b>SAPHZ</b> Pinhole, 2.0" <b>SASLPZ</b> Slot Aperture <b>SALWPZ</b> Wall Wash <b>SAWLpz</b> Wet Location	<b>SG</b> Semi-Diffuse Low Iridescent <b>MW</b> Matte White <b>MB</b> Matte Black	<b>GL</b> Clear Glass Lens <b>SO</b> Micro Prism Solite™ Lens <b>NL</b> No Lens
				H12	12" - 24" Expandable Bars			
				CB24	24" C-Channel Bars			

