



QUINCY SERIES
DAMP / WET LOCATION
SUBWAY LINE

PROJECT: _____
 QUANTITY: _____ TYPE: _____



NL1010GV
 PG - Pub Green



NL1010GV
 BY - Burgandy



NL1010GV
 AC - Anodic Champagne



NL1010GV
 OR - Orange

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²	ACCESSORIES ⁴	MOUNTING ⁵	FINISH ⁹	WET KIT
NL1008GV NL1010GV NL1012GV	15L 1500 Lm 27L 2700 Lm	80 CRI 27K 2700K 30K 3000K 35K 3500K 40K 4000K 90 CRI 27HK 2700K 30HK 3000K 35HK 3500K 40HK 4000K	EX DS2W1 DO10X DLTE1 ³ DL3EX ³ Electronic Driver, 120V/277V ELV/MLV, 120V 1%, 0-10V, 120V/277V Lutron® 2-Wire Forward Phase (MLV), 120V 1%, Lutron® EcoSystem®, Fades to Black, 120V/277V	FJ1 ⁶ 3"x6.5" Frosted Glass PJ3 3"x6.5" Prismatic Glass AMJ1 3"x6.5" Amber Glass RDJ1 3"x6.5" Red Glass BLJ1 3"x6.5" Blue Glass GRJ1 3"x6.5" Green Glass SS1 Side Glass Shield BS1 Bottom Shield Cup CG1 Cast Guard	WALL MOUNT CP104 Small Driver Canopy CP104KO Small Driver Canopy w/ Knockouts CP106 Large Driver Canopy CP6/RMD Remote Mount Driver SP90_7 Straight Arm PA_7 Mounting Arm Style CEILING MOUNT RDC5 Small Driver Canopy CP13 Large Driver Canopy HM_4 Hang Straight AT_4 Hang Straight All Thread PM_6 Rigid Pendant Mount CD_6 Cord / Cable Mount CM_6 Cord Mount	MW ¹⁰ Matte White MB ¹⁰ Matte Black PT ¹⁰ Platinum Silver CC Custom Color See Page 5 for Full Range of Color Options (83-90081)	WLKA Wet Location Kit

EXAMPLE: NL1008GV15L30KEXFJ1/CP104PA23BZ

NOTES:
 1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 Available with CP106/CP13 Only 4 Enclosure, Wire Guard Required - Choose One Option
 5 Standard Enclosure 6 See Mounting Page for Details on Components and Finishes 7 See Mounting Page for Available Arm Options
 8 Specify Length in Inches: See Mounting Page for Available Lengths 9 See Color Page for More Options/Consult Factory for Special Finishes 10 Standard Finishes






QUINCY SERIES
DAMP / WET LOCATION
SUBWAY LINE

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
NL1010GV15L	1500	1036	11	105
NL1010GV27L	2700	1808	18	99

¹Nominal Source Lumens at 35K ² Nominal Delivered Lumens at 35K

HOUSING DIMENSIONS



Dimensioned with **NL1010GV** Featuring **FJ1** and **CG1**

SERIES	A	B
NL1008GV	8.1	10.6
NL1010GV	10.3	10.6
NL1012GV	12.5	10.6

APPLICATION

Quincy series for decorative area lighting.

FEATURES

Spectrum Lighting's RLM Classics are inspired by vintage lighting fixtures redesigned with modern LED light sources and materials. The wide range of options for illumination, mounting, enclosures, guards and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement. Fixture available in three sizes.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Interior painted same finish as exterior.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall mount canopies are die-cast aluminum with stainless steel hardware. Wall arms are formed 3/4 NPT aluminum pipe and may be field cut.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Wet Location Option. Manufactured and tested to UL standards No. 1598/8750.

SERIES
NL1008GV
SIZES



NL1010GV



NL1012GV



ENCLOSURES

FJ1 3" FROSTED TALL	MF1 3" FROSTED MINI	PJ3 3" PRISMATIC GLASS	AMJ1 3" AMBER GLASS	RDJ1 3" RED GLASS	BLJ1 3" BLUE GLASS	GRJ1 3" GREEN GLASS	SS1 3" SIDE SHIELD	BS1 3" BOTTOM CUP

WALL MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & DIMENSIONS.)

PA_
MOUNTING ARM STYLE



NL1008GV SHOWN WITH PA23

CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM
HANG STRAIGHT / ALL THREAD / PENDANT



NL1008GV SHOWN WITH RDC5PM

CD
CORD / CABLE MOUNT



NL1008GV SHOWN WITH RDC5CD

CM
CORD MOUNT



NL1008GV SHOWN WITH RDC5CM



QUINCY SERIES

DAMP / WET LOCATION

SUBWAY LINE / PHOTOMETRIC DATA

NL1008GV 27L 35K XX FJ1 MW

CANDLEPOWER CURVE TEST SP-00937_1	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE		MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT											
			Mounting Height AFF	FC at Center on Floor	Ceiling Height	Fixture Spacing	RCR 2		RCR 4							
	0.00°															
	0.00°	385	0° - 20°	127	7%	6.5'	9 fc	9'	6'	46	0.60	22	0.39	Delivered Illuminance Rating: (DIR)	75 FC per W/Sq. Ft.	57 FC per W/Sq. Ft.
	20.00°	305	20° - 50°	584	34%	7.5'	7 fc	12'	8'	19	0.25	9	0.16			
	40.00°	320	50° - 80°	669	38%	8.5'	5 fc	16'	10'	13	0.17	10	0.17			
	60.00°	256	80° - 90°	146	8%	10.0'	4 fc	Delivered Illuminance Rating: (DIR)								
	80.00°	155	0° - 90°	1,525	88%	12.0'	3 fc									
	90.00°	113	90° - 120°	204	12%	14.0'	2 fc	1' Suspension Length to luminous height midpoint Square rooms used for multiple units: RCR 2: Length & Width = Ceiling Ht. - 3.5' x 5.00 RCR 4: Length & Width = Ceiling Ht. - 3.5' x 2.50 * Average Footcandles at 2.5' Above Floor								
	100.00°	83	120° - 150°	12	1%	16.0'	2 fc									
	110.00°	44	Total	1,742	100%	20.0'	1 fc									
	120.00°	16														
	140.00°	2														
	160.00°	2														
	180.00°	2														

Delivered Lumens: 1,742
Luminaire Watts: 18.3
LER: 95.19

CP at 0deg (Nadir): 385
CRI: 80

Lumen Multiplier: 15L x 0.573
CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03

NL1010GV 27L 35K XX FJ1 MW

CANDLEPOWER CURVE TEST SP-00938_1	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE		MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT											
			Mounting Height AFF	FC at Center on Floor	Ceiling Height	Fixture Spacing	RCR 2		RCR 4							
	0.00°															
	0.00°	422	0° - 20°	139	8%	6.5'	10 fc	9'	6'	48	0.60	23	0.39	Delivered Illuminance Rating: (DIR)	80 FC per W/Sq. Ft.	60 FC per W/Sq. Ft.
	20.00°	338	20° - 50°	648	36%	7.5'	8 fc	12'	8'	20	0.25	10	0.16			
	40.00°	356	50° - 80°	688	38%	8.5'	6 fc	16'	10'	13	0.17	10	0.17			
	60.00°	272	80° - 90°	135	7%	10.0'	4 fc	Delivered Illuminance Rating: (DIR)								
	80.00°	145	0° - 90°	1,610	89%	12.0'	3 fc									
	90.00°	105	90° - 120°	187	10%	14.0'	2 fc	1' Suspension Length to luminous height midpoint Square rooms used for multiple units: RCR 2: Length & Width = Ceiling Ht. - 3.5' x 5.00 RCR 4: Length & Width = Ceiling Ht. - 3.5' x 2.50 * Average Footcandles at 2.5' Above Floor								
	100.00°	78	120° - 150°	10	1%	16.0'	2 fc									
	110.00°	39	Total	1,809	100%	20.0'	1 fc									
	120.00°	13														
	140.00°	2														
	160.00°	1														
	180.00°	1														

Delivered Lumens: 1,809
Luminaire Watts: 18.3
LER: 98.85

CP at 0deg (Nadir): 422
CRI: 80

Lumen Multiplier: 15L x 0.573
CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03

NL1012GV 27L 35K XX FJ1 MW

CANDLEPOWER CURVE TEST SP-00939_1	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE		MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT											
			Mounting Height AFF	FC at Center on Floor	Ceiling Height	Fixture Spacing	RCR 2		RCR 4							
	0.00°															
	0.00°	426	0° - 20°	140	8%	6.5'	10 fc	9'	6'	48	0.60	23	0.39	Delivered Illuminance Rating: (DIR)	79 FC per W/Sq. Ft.	60 FC per W/Sq. Ft.
	20.00°	339	20° - 50°	646	36%	7.5'	8 fc	12'	8'	20	0.25	10	0.16			
	40.00°	354	50° - 80°	686	38%	8.5'	6 fc	16'	10'	13	0.17	10	0.17			
	60.00°	271	80° - 90°	136	8%	10.0'	4 fc	Delivered Illuminance Rating: (DIR)								
	80.00°	146	0° - 90°	1,608	90%	12.0'	3 fc									
	90.00°	106	90° - 120°	176	10%	14.0'	2 fc	1' Suspension Length to luminous height midpoint Square rooms used for multiple units: RCR 2: Length & Width = Ceiling Ht. - 3.5' x 5.00 RCR 4: Length & Width = Ceiling Ht. - 3.5' x 2.50 * Average Footcandles at 2.5' Above Floor								
	100.00°	73	120° - 150°	8	0%	16.0'	2 fc									
	110.00°	34	Total	1,793	100%	20.0'	1 fc									
	120.00°	10														
	140.00°	1														
	160.00°	1														
	180.00°	1														

Delivered Lumens: 1,793
Luminaire Watts: 18.3
LER: 97.98

CP at 0deg (Nadir): 426
CRI: 80

Lumen Multiplier: 15L x 0.573
CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03




MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




WALL MOUNTING

CP104 - SMALL DRIVER CANOPY (STANDARD)
MAY BE USED AS SPLICE BOX FOR DIRECT FEED
NOT AVAILABLE W/ PA16 & PA16F




CP106 - LARGE DRIVER CANOPY
MAY BE USED AS SPLICE BOX FOR DIRECT FEED



CP6/RMD - REMOTE MOUNT DRIVER
MOUNTS DIRECTLY TO WALL OR OCTAGON STYLE J-BOX




CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY. ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.

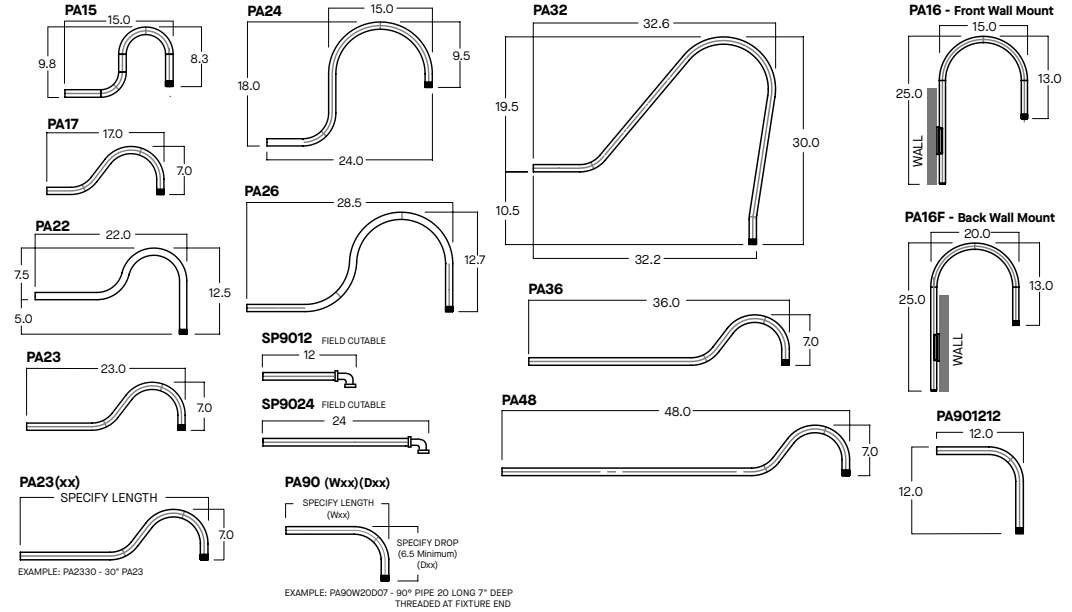


CEILING MOUNTING


RDC5 - SMALL DRIVER CANOPY (STANDARD)
MOUNTS TO 4" OCTO J-BOX



CP13 - LARGE DRIVER CANOPY




HM*
HANG STRAIGHT
45° SWIVEL 5/8" OD STEM - 3/8" IP




ORDER: HM (Length)
SPECIFY LENGTH:
HM3 - 3" HM24 - 24"
HM6 - 6" HM36 - 36"
HM12 - 12" HM48 - 48"
HM18 - 18" HM72 - 72"
HMLC(XX)
Custom Length
(Specify in Inches)

PM*
RIGID PENDANT MOUNT
RIGID 5/8" OD STEM - 3/8" IP




ORDER: PM (Length)
SPECIFY LENGTH:
PM3 - 3" PM24 - 24"
PM6 - 6" PM36 - 36"
PM12 - 12" PM48 - 48"
PM18 - 18" PM72 - 72"
PMLC(XX)
Custom Length
(Specify in Inches)

AT**
HANG STRAIGHT ALL THREAD
45° SWIVEL 5/8" OD STEM - 1/4" IP



ORDER: AT (Length)
SPECIFY LENGTH:
AT12 - 12"
AT24 - 24"
AT36 - 36"
AT48 - 48"
AT60 - 60"
AT72 - 72"
FIELD CUT IN THREADED PIPE TO LENGTH NEEDED. CUT PIPE COVER IS SHORTER THAN THREADED PIPE. SUPPLY COVER OVER THREADED PIPE.

CD
CORD / CABLE MOUNT
SJ CORD WITH 1/16 SS CABLE



ORDER: CD (Length)
SPECIFY LENGTH:
CD36 - 36"
CD72 - 72"
CD144 - 144"
CDLC(XX)
Custom Length
(Specify in Inches)

CM
CORD MOUNT
SJ CORD WITH STRAIN RELIEF



ORDER: CM (Length)
SPECIFY LENGTH:
CM36 - 36"
CM72 - 72"
CM144 - 144"
CMLC(XX)
Custom Length
(Specify in Inches)

*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.
**ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES


TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⌚
Tier 2 - Typical Finishes	\$\$	⌚⌚
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

TIER 1 - STANDARD FINISHES



TIER 2 - TYPICAL FINISHES

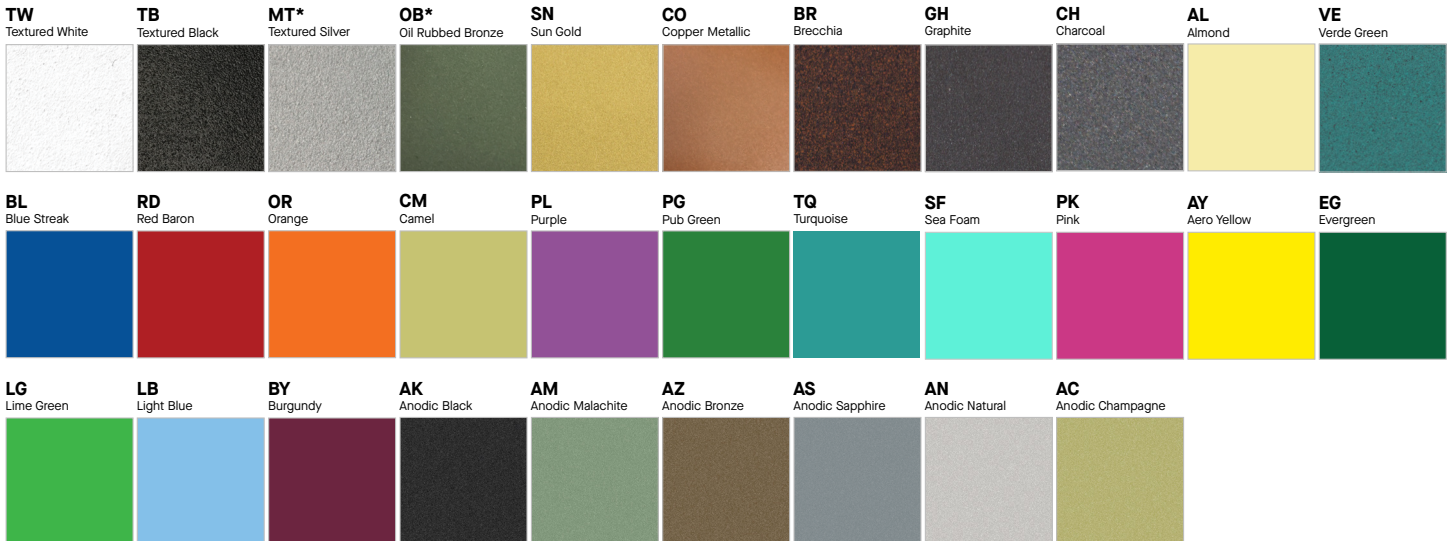

CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

