




CLOUD 11"/14" ROUND SURFACE LIGHT
GV SERIES / 2700 LUMENS MAX

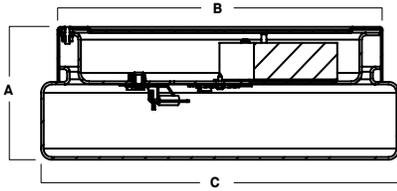

SERIES	A	B	C
SX1104RDLEDGV	3.9	10.0	11.0
SX1405RDLEDGV	4.7	12.8	13.8

PROJECT: _____
 QUANTITY: _____ TYPE: _____

SX-RDLEDGV

APPLICATION

Cloud 11" and 14" surface round light for area illumination.

FEATURES

SpecLume series fixtures offer contemporary style with functional luminaire performance. Fixtures designed and manufactured in our factory. Fixture produces horizontal and vertical illumination. Designed for through wiring. Reflective gloss white reflector behind lamp for enhanced light output. Interchangeable LED module for ease of maintenance. A variety of mounting options are available.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3 step MacAdam Ellipse binning. Standard CRI: 85+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixtures are spun in our factory from .063 high purity aluminum. Passive aluminum heatsink for optional thermal management. Formed UV stabilized opal white acrylic diffuser.

CODE COMPLIANCE

ARRA Compliant. ETL listed for damp locations. ADA Compliant, excluding: SX1405LEDGV. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE TO LUMENS UPDATE			
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS ¹	SYSTEM WATTS
SX1405RDLEDGV15L	SX1405RDLEDGV14W	1500	9
SX1405RDLEDGV27L	SX1405RDLEDGV26W	2700	16

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²	OPTIONS ³	MOUNTING ⁴	DIFFUSER	FINISH ⁶
SX1104RDLEDGV	15L 1500 Lm	27K 2700K	EX Electronic Driver, 120V/277V	FS Fuse holder and Fuse GS Ceiling Level Gasket	HM ⁵ Hang Straight PM ⁵ Rigid Pendant	OP White Opal Acrylic	MW ⁷ Matte White
SX1405RDLEDGV	15L 1500 Lm 27L 2700 Lm	30K 3000K 35K 3500K 40K 4000K	DO10X 1% 0-10V Dimming, 120V/277V DS2W1 2 Wire Phase Dimming, 120V	TBM Thumb Screw Attachment	SM Surface Mount WM Wall Mount	White Opal Polycarbonate	MB ⁷ Matte Black PT ⁷ Platinum Silver CC Custom Color
							See Page 2 for Full Range of Color Options (83-90082)

EXAMPLE: SX1104RDLEDGV15L35KEXSMOPMW

NOTES:
 1 Nominal Source Lumens At 3500K 2 Contact Factory for Additional Options 3 See Product Options Page for Details 4 See Mounting Page for Details on Components and Finishes 5 Specify Length in Inches: See Mounting Page for Available Lengths 6 Contact Factory for Special Finishes 7 Standard Finishes



COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



STANDARD CORD / STEM / CANOPY FINISHES

FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Gloss Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

PAINT TIMES

TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⓪
Tier 2 - Typical Finishes	\$\$	⓪⓪
Tier 3 - Special Metal Finishes	\$\$\$	⓪⓪⓪
Custom Color	Contact Factory	Contact Factory

*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES


TIER 1 - STANDARD FINISHES



TIER 2 - TYPICAL FINISHES



TIER 3 - SPECIAL METAL FINISHES

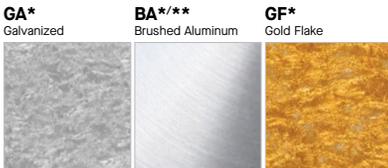

CUSTOM COLOR FINISHES

CONTACT FACTORY

CC
Custom Color



*UNAVAILABLE FOR WET LOCATION

**UNAVAILABLE FOR INTERIOR

