



# ALUMINUM DECO-REFLECTOR PENDANT DAMP LOCATION XT SERIES

PROJECT: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_



RP1014XT  
 GH - Graphite  
 LGI - Lime Green Interior  
 FGR - Frosted Glass Ring



RP1014XT  
 AY - Aero Yellow  
 EGI - Evergreen Interior  
 CFG - Center Frosted Glass Tier



RP1014XT  
 OR - Orange  
 MWI - Matte White Interior  
 FGR - Frosted Glass Tier



RP1014XT  
 BR - Brecchia  
 BZI - Bronze Interior  
 1MR - Single Metal Ring

| SERIES   | LUMENS <sup>1</sup> | CCT        | DRIVER / DIMMING <sup>2</sup>                               | MOUNTING <sup>4</sup>                    | TIER OPTIONS                       | INTERIOR <sup>10</sup>                                | FINISH <sup>10</sup>                                  |
|----------|---------------------|------------|---|--|------------------------------------|---|---|
| RP1014XT | 10L 1000 Lm         | 83 CRI     | EX Electronic Driver, 120V/277V                             | RDC5 <sup>5</sup> Small Driver Canopy    | CFG Center Frosted Glass Tier      | MW <sup>11</sup> Matte White                          | MW <sup>11</sup> Matte White                          |
| RP1214XT | 13L 1300 Lm         | 27K 2700K  | DO10X 1%, 0-10V, 120V/277V                                  | CP13 <sup>3</sup> Large Driver Canopy    | FGR Frosted Glass Ring             | CCI Custom Color                                      | MB <sup>11</sup> Matte Black                          |
|          | 20L 2000 Lm         | 30K 3000K  | DS2W1 ELV/MLV, 120V   | HM <sup>6</sup> Hang Straight            | 1MR <sup>8</sup> Single Metal Ring | FCI Fixture Color Interior                            | PT <sup>11</sup> Platinum Silver                      |
|          | 30L 3000 Lm         | 35K 3500K  | DLTE1 <sup>3</sup> Lutron® 2-Wire Forward Phase (MLV), 120V | AT <sup>6</sup> Hang Straight All Thread | TIER COLOR OPTIONS                 |   | CC Custom Color                                       |
|          |                     | 40K 4000K  | DL3EX <sup>3</sup> 1%, Lutron® EcoSystem®, 120V/277V        | PM <sup>6</sup> Rigid Pendant Mount      | FC <sup>9</sup> Fixture Color      | See Page 4 for Full Range of Color Options (83-90081) | See Page 4 for Full Range of Color Options (83-90081) |
|          |                     | 98 CRI     |   | CD <sup>6</sup> Cord / Cable Mount       | MW Matte White                     |   |   |
|          |                     | 27HK 2700K |   | CM <sup>6</sup> Cord Mount               | MB Matte Black                     |   |   |
|          |                     | 30HK 3000K |   | EMCR <sup>7</sup> 10W Canopy Mounted EM  | PT Platinum Silver                 |   |   |
|          |                     | 35HK 3500K |   | EMRM 7W Remote EM                        | SN Sun Gold                        |   |   |
|          |                     | 40HK 4000K |   | EMEN 7W Remote with Enclosure            | EG Evergreen                       |   |   |
|          |                     |            |   |  | RD Red Baron                       |   |   |

EXAMPLE: RP1014XT10L27KEX/RDC5CD24CFGMWIMB

NOTES:  
 1 Nominal Source Lumens At Any CCT 2 Contact Factory for Additional Options 3 CP13 Required for Lutron Drivers 4 See Mounting Page for Details on Components and Finishes  
 5 Required for All Drivers Excluding Lutron Drivers 6 Specify Length in Inches; See Mounting Page for Available Lengths 7 EMCR Replaces RDC5 or CP13 8 Same Finish as Housing  
 9 Tier to Match Fixture if Finish Not Specified 10 See Color Page for More Options/Consult Factory for Special Finishes 11 Standard Finishes






# ALUMINUM DECO-REFLECTOR PENDANT DAMP LOCATION XT SERIES

| LUMENS / WATTAGE DATA |                            |                               |              |      |
|-----------------------|----------------------------|-------------------------------|--------------|------|
| PART NUMBER           | SOURCE LUMENS <sup>1</sup> | DELIVERED LUMENS <sup>2</sup> | SYSTEM WATTS | LPW  |
| RP1014XT10L           | 1000                       | 675                           | 8            | 84   |
| RP1014XT13L           | 1300                       | 877                           | 12           | 73   |
| RP1014XT20L           | 2000                       | 1300                          | 20           | 63.5 |
| RP1014XT30L           | 3000                       | 2025                          | 30           | 67.5 |

<sup>1</sup> Nominal Source Lumens at Any CCT <sup>2</sup> Nominal Delivered Lumens at Any CCT

## HOUSING DIMENSIONS

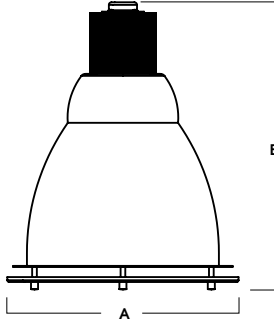

Dimensioned with **RP1014XT with Decorative Trim**

| SERIES   | A    | B    |
|----------|------|------|
| RP1014XT | 12.3 | 15.3 |
| RP1214XT | 14.0 | 17.0 |

## APPLICATION

Reflector Pendant's distinctive styling will enhance any space with efficient lighting and striking design. The Deco-Reflector features suspended glass and metal tier options.

## FEATURES

Speculume series fixtures offer simple contemporary style with functional luminaire performance. All fixtures are designed and manufactured in our factory. Reflector pendant is available in two sizes with direct lighting. Separate finishes may be chosen for fixture and mounting. Interchangeable LED module for ease of maintenance. Electronic LED Driver in canopy for thermal management. A variety of mounting and finish options available.

## FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion. Specify inside and outside finish. Matte white interior is standard.

## ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 1 x 2-step MacAdam Ellipse binning. High CRI is 98 with 1 x 2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

## CONSTRUCTION

Fixtures are spun in our factory from 0.063 high purity aluminum. Passive extruded aluminum heatsink for optimal thermal management. Deco tier glass is tempered and finished to specification. OSD diffusion optic lens standard.

## CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750

## SERIES SIZES

RP1014XT



RP1214XT



## CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM

HANG STRAIGHT / ALL THREAD / PENDANT



RP1014XT SHOWN WITH RDC5PM

CD

CORD / CABLE MOUNT



RP1014XT SHOWN WITH RDC5CD

CM

CORD MOUNT



RP1014XT SHOWN WITH RDC5CM



# MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF SPECULUME SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



## CEILING MOUNTING

|  |  |  |   |  |  |
|--|--|--|---|--|--|
| <p><b>RDC5</b> - SMALL DRIVER CANOPY (STANDARD)<br/>MOUNTS TO 4" OCTO J-BOX</p> <p><b>CP13</b> - LARGE DRIVER CANOPY</p> | <p><b>HM*</b><br/>HANG STRAIGHT<br/>45° SWIVEL 1/2" STEM - 3/8" NPT</p> <p>ORDER: <b>HM</b> (Length)<br/>SPECIFY LENGTH:<br/>HM3 - 3"    HM24 - 24"<br/>HM6 - 6"    HM36 - 36"<br/>HM12 - 12"    HM48 - 48"<br/>HM18 - 18"    HM72 - 72"<br/><b>HMLC(XX)</b><br/>Custom Length<br/>(Specify in Inches)</p> | <p><b>AT**</b><br/>HANG STRAIGHT ALL-THREAD<br/>45° SWIVEL 1/2" STEM - 1/4" IP</p> <p>ORDER: <b>AT</b> (Length)<br/>SPECIFY LENGTH:<br/>AT12 - 12"<br/>AT24 - 24"<br/>AT36 - 36"<br/><small>FIELD CUT: THREADED PIPE TO LENGTH NEEDED. CUT PIPE COVER 3/4" SHORTER THAN THREADED PIPE. SUPPLY PIPE COVER OVER THREADED PIPE.</small></p> | <p><b>PM*</b><br/>RIGID PENDANT MOUNT<br/>RIGID 1/2" STEM - 3/8" NPT</p> <p>ORDER: <b>PM</b> (Length)<br/>SPECIFY LENGTH:<br/>PM3 - 3"    PM24 - 24"<br/>PM6 - 6"    PM36 - 36"<br/>PM12 - 12"    PM48 - 48"<br/>PM18 - 18"    PM72 - 72"<br/><b>PMLC(XX)</b><br/>Custom Length<br/>(Specify in Inches)</p> | <p><b>CD</b><br/>CORD / CABLE MOUNT<br/>SJ CORD WITH 1/16 SS CABLE</p> <p>ORDER: <b>CD</b> (Length)<br/>SPECIFY LENGTH:<br/>CD36 - 36"<br/>CD72 - 72"<br/>CD144 - 144"<br/><b>CDLC(XX)</b><br/>Custom Length<br/>(Specify in Inches)</p> | <p><b>CM</b><br/>CORD MOUNT<br/>SJ CORD WITH STRAIN RELIEF</p> <p>ORDER: <b>CM</b> (Length)<br/>SPECIFY LENGTH:<br/>CM36 - 36"<br/>CM72 - 72"<br/>CM144 - 144"<br/><b>CMLC(XX)</b><br/>Custom Length<br/>(Specify in Inches)</p> |
|--|--|--|---|--|--|

\*MAXIMUM ONE PIECE STEM LENGTH IS 72". \*\*MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS. \*\*ORDER IN 12" INCREMENTS. ODD SIZES MAY BE FIELD CUT

## EMERGENCY BATTERY OPTIONS

**EMCR** - LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY (FOR ROUND CEILING MOUNT TYPES)

## REMOTE EMERGENCY BATTERY OPTIONS

| <p><b>EMRM*</b> - 7W REMOTE EMERGENCY BATTERY (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>1.3</td> <td>12.6</td> <td>13.0</td> </tr> </tbody> </table> | A    | B    | C | 1.3 | 12.6 | 13.0 | <p><b>EMEN*</b> - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>2.0</td> <td>17.0</td> <td>6.2</td> </tr> </tbody> </table> | A | B | C | 2.0 | 17.0 | 6.2 |
|---|------|------|---|-----|------|------|---|---|---|---|-----|------|-----|
| A   | B    | C    |   |     |      |      |   |   |   |   |     |      |     |
| 1.3   | 12.6 | 13.0 |   |     |      |      |   |   |   |   |     |      |     |
| A   | B    | C    |   |     |      |      |   |   |   |   |     |      |     |
| 2.0   | 17.0 | 6.2  |   |     |      |      |   |   |   |   |     |      |     |

\*OTHER EM BATTERY SIZES AVAILABLE. CONSULT FACTORY



# COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.  
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



## STANDARD CORD / STEM / CANOPY FINISHES

| FIXTURE COLOR                            | STANDARD CORD COLOR | STANDARD CANOPY / STEM COLOR |
|--|---------------------|------------------------------|
| Matte White, Textured White              | Matte White         | Matte White                  |
| Gloss White                              | Matte White         | Gloss White                  |
| Matte Black, Gloss Black, Textured Black | Matte Black         | Matte Black                  |
| All Others                               | Matte Black         | Same Color as Fixture        |
| Custom Color                             | Contact Factory     | Contact Factory              |

## PAINT TIMES


| TIER                       | COST            | AVERAGE PAINT TIME* |
|----------------------------|-----------------|---------------------|
| Tier 1 - Standard Finishes | \$              | ⌚                   |
| Tier 2 - Typical Finishes  | \$\$            | ⌚⌚                  |
| Custom Color               | Contact Factory | Contact Factory     |

\*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

## TIER 1 - STANDARD FINISHES



## TIER 2 - TYPICAL FINISHES

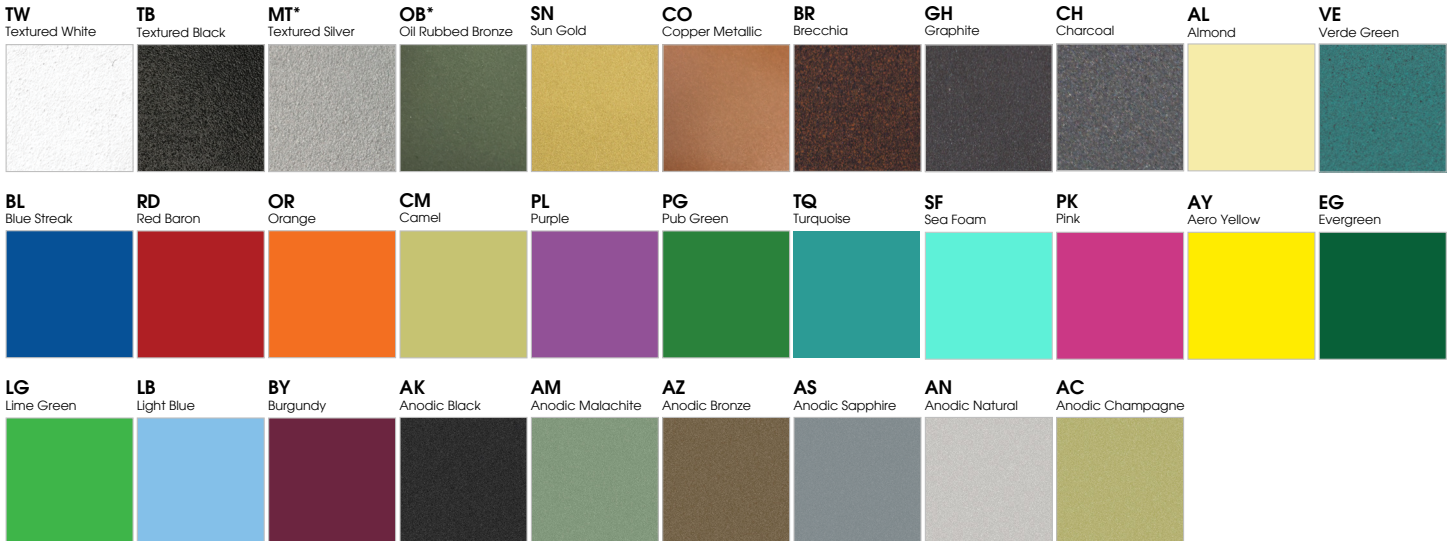

## CUSTOM COLOR FINISHES

CONTACT FACTORY

**CC**  
Custom Color



\*UNAVAILABLE FOR WET LOCATION

