
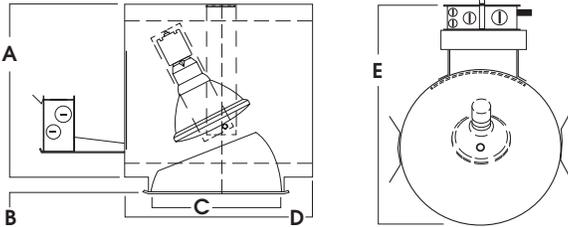


# 8" ADJUSTABLE ACCENT

PAR30L-PAR38 SERIES / 250 WATT MAX INC

recessed fixtures

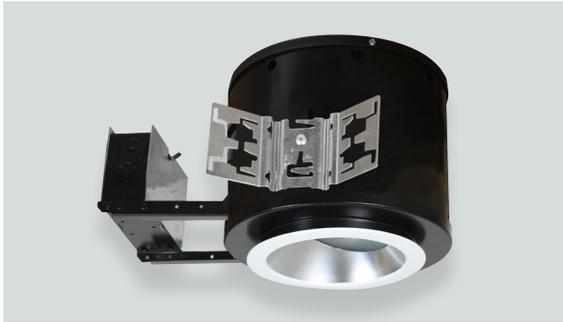

A	B	C	D	E
10.7	0.6	7.5	11.5	16.0
271.8 mm	15.8 mm	190.5 mm	292.1 mm	406.4 mm

## SGA8IN

### APPLICATION

8" Round PAR30/ PAR38 accent light for Incandescent lamps.

### FEATURES

Efficient trim design with a variety of lens options. Trim rotates/ locks 360°. Lamp tilts/locks 35°. Integral 5/8" (0.625) plaster ring. Maximum wattage label (MWL) for low wattage Incandescent or LED lamps. Tool-less ballast access. Multi-bar adjustable mounting brackets.

### FINISH

Variety of powdercoat and anodized finishes available on trim. Eco Black (EB) finish available on frame/housing.

### ELECTRONICS

120 Volt is standard. Use option T277 for 277V supply feed.

### CONSTRUCTION

Frame constructed of 20 ga. aluminum. Trim spun from .063 high purity aluminum and finished to specification.

### LABELS

UL/ETL Listed for Damp locations. Wet location available. Manufactured and tested to UL Standard No. 1598.

RECESSED HOUSING SPECIFICATION		TRIM SPECIFICATION											
SERIES	OPTIONS	TRIM OPTIONS <sup>4</sup>		FIXTURE LAMPING <sup>9</sup>									
<b>SGA8IN</b>	<b>BH27</b> 27" Bar Hangers <b>CB24</b> C-Channel Bars <b>CCEA</b> Chicago Ceiling Plenum <b>CR</b> Corrosion Resistant <b>T277</b> Step Down Transformer 277v to 120v <b>FS</b> Fusing <b>PR<sup>2</sup></b> Plaster Ring <b>MWL<sup>3</sup></b> Max Wattage Label <b>EB</b> Eco Black Housing Finish <b>TBC</b> T-Bar Clips <b>TR</b> Top Relamping Option	<b>AR8500</b>	<b>SG<sup>4</sup></b> Semi-Diffuse	<b>GS</b> Gasket	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>LAMP</th> <th>MAX WATT</th> </tr> </thead> <tbody> <tr> <td>PAR30L</td> <td>75W</td> </tr> <tr> <td>PAR38</td> <td>250W<sup>10</sup></td> </tr> <tr> <td>R40</td> <td>250W<sup>10</sup></td> </tr> </tbody> </table>	LAMP	MAX WATT	PAR30L	75W	PAR38	250W <sup>10</sup>	R40	250W <sup>10</sup>
		LAMP	MAX WATT										
PAR30L	75W												
PAR38	250W <sup>10</sup>												
R40	250W <sup>10</sup>												
<b>AR8550<sup>2</sup></b>	<b>HZ</b> Haze Full Diffuse <b>MW</b> Matte White <b>MB</b> Matte Black <b>AC</b> Anodic Champagne <b>AS</b> Anodic Sapphire <b>PT</b> Platinum Silver <b>OB</b> Oil Rubbed Bronze <b>CH</b> Charcoal <b>AS</b> Anodic Sapphire <b>AM</b> Anodic Malachite <b>SN</b> Sun Gold <b>CO</b> Copper Metallic <b>GH</b> Graphite <b>AMB</b> Anti Microbial Finish <b>CC</b> Custom Color <b>PF<sup>7</sup></b> Polished Flange	<b>GL</b> Clear Glass Lens <b>PG</b> Prismatic Glass Lens <b>SO</b> Micro Prism Solite™ Lens <b>LN</b> See Recessed Fixtures/Lens Options for Lens, Louver and Filter Accessories <b>WL<sup>8</sup></b> Wet Location											

**EXAMPLE: SGA8IN/AR8500 SG**

**NOTES:**  
 1 Standard Bar Hangers 2 Special Depth 3 Specify Wattage 4 Contact Factory for Special Finishes 5 Finish as Specified for Lens Options 6 Standard Finish 7 Flange and Reflector Same Finish  
 8 Only Available in AR8550 9 Medium Base 10 Open - No Lens/No Wet Location Only



PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_



Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.