




TETON
INCANDESCENT
 DOMO SHADES



A	B
16.1	13.4
408.9 mm	340.36 mm

PROJECT: _____
 QUANTITY: _____ TYPE: _____

EG1612INC

APPLICATION

Teton offers a clean design for decorative area lighting.

FEATURES

Spectrum Lighting's RLM Series are interpretations of classic lighting fixtures reimagined with modern INC light sources and materials. The wide range of combinations for illumination, mounting, enclosures, guards and finishes allows for creative fixture specification and design. A variety of lamp enclosures are available as well as guards and light shields. Fixtures may be wall or pendant mounted with standard or custom wall arm (goosenecks) and pendants. MR16 and LED lamping available.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion. Interior is Matte White unless specified. Custom Color interior finishes available.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall enclosures and fittings are die-cast aluminum with stainless steel hardware. Wall arms are formed 3/4 NPT aluminum pipe. Gaskets are machine cut neoprene.

CODE COMPLIANCE

ETL listed for damp locations. Manufactured and tested to UL standard No. 1598.

SERIES	MOUNTING ¹	INTERIOR ⁴	FINISH ⁴
EG1612INC	WALL MOUNT	MW ⁵ Matte White CCI Custom Color FCI Fixture Color Interior	MW ⁵ Matte White MB ⁵ Matte Black PT ⁵ Platinum Silver CC Custom Color
	CP6 ¹ Wall Pipe Interface CP3 CP6 Decorative Cover PA ₂ Mounting Arm Style SP90 ₂ Straight Arm		
	CEILING MOUNT		
	HM ₃ Hang Straight Pendant AT ₃ Hang Straight All Thread PM ₃ Pendant/Straight Mount CD ₃ Cord and Cable Mount CM ₃ Cord Mount		

EXAMPLE: EG1612INC/HM24/GWFCIMW

NOTES:
 1 See Mounting Pages Options and Details on Components and Finishes 2 See Mounting Page for Available Arm Options 3 Specify Length in Inches: See Mounting Page for Available Lengths 4 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 5 Standard Finishes




MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.
NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




WALL MOUNTING

CP6 - MOUNTS DIRECTLY TO WALL OR OCTAGON STYLE J-BOX




CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY. ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.

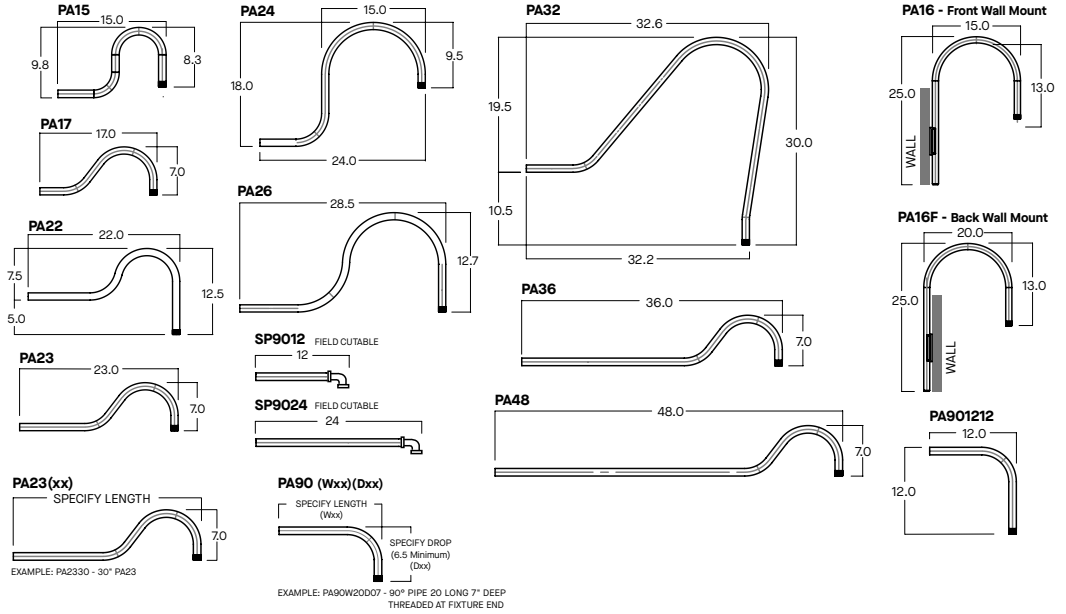


CEILING MOUNTING

HM*
HANG STRAIGHT
45° SWIVEL 5/8" OD STEM - 3/8" IP




ORDER: HM (Length)
SPECIFY LENGTH:
HM3 - 3" **HM24** - 24"
HM6 - 6" **HM36** - 36"
HM12 - 12" **HM48** - 48"
HM18 - 18" **HM72** - 72"
HMLC(XX)
Custom Length
(Specify in Inches)

PM*
RIGID PENDANT MOUNT
RIGID 5/8" OD STEM - 3/8" IP




ORDER: PM (Length)
SPECIFY LENGTH:
PM3 - 3" **PM24** - 24"
PM6 - 6" **PM36** - 36"
PM12 - 12" **PM48** - 48"
PM18 - 18" **PM72** - 72"
PMLC(XX)
Custom Length
(Specify in Inches)

AT**
HANG STRAIGHT ALL THREAD
45° SWIVEL 5/8" OD STEM - 1/4" IP



ORDER: AT (Length)
SPECIFY LENGTH:
AT12 - 12" **AT48** - 48"
AT24 - 24" **AT60** - 60"
AT36 - 36" **AT72** - 72"
FIELD CUT, THREADED PIPE TO LENGTH REQUIRED. CUT PIPE COVER 1/4" SHORTER THAN THREADED PIPE. SLIP PIPE COVER OVER THREADED PIPE.

CD
CORD / CABLE MOUNT
SJ CORD WITH 1/16 SS CABLE



ORDER: CD (Length)
SPECIFY LENGTH:
CD36 - 36"
CD72 - 72"
CD144 - 144"
CDLC(XX)
Custom Length
(Specify in Inches)

CM
CORD MOUNT
SJ CORD WITH STRAIN RELIEF



ORDER: CM (Length)
SPECIFY LENGTH:
CM36 - 36"
CM72 - 72"
CM144 - 144"
CMLC(XX)
Custom Length
(Specify in Inches)

*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.
**ORDER IN 12" INCREMENTS. ODD SIZES MAY BE FIELD CUT

