



**10" STAGECOACH SHADE**  
**DAMP / WET LOCATION**  
 CLASSIC SHAPES

PROJECT: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_



SV1007GV  
 EG - Evergreen



SV1007GV  
 TQ - Turquoise



SV1007GV  
 CH - Charcoal



SV1007GV  
 PT - Platinum Silver

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING <sup>2</sup>	ACCESSORIES <sup>4</sup>	MOUNTING <sup>5</sup>	FINISH <sup>10</sup>	WET KIT
SV1007GV	15L 1500 Lm 27L 2700 Lm	80 CRI	<b>EX</b> Electronic Driver, 120V/277V 1%, 0-10V, 120V/277V ELV/MLV, 120V <b>DLTE1</b> <sup>3</sup> Lutron® 2-Wire Forward Phase (MLV), 120V <b>DL3EX</b> <sup>3</sup> 1%, Lutron® EcoSystem®, Fades to Black, 120V/277V	<b>ENCLOSURES</b> <b>TF1</b> <sup>5</sup> 3" Frosted Dome <b>TG1</b> 3" Dome Wire Guard <b>MF1</b> 3" Frosted Mini <b>MG1</b> 3" Short Wire Guard <b>FJ1</b> 3" Frosted Tall <b>FG1</b> 3" Tall Wire Guard	<b>WALL MOUNT</b> <b>CP104</b> Small Driver Canopy <b>CP104KO</b> Small Driver Canopy w/ Knockouts <b>CP106</b> Large Driver Canopy <b>CP6/RMD</b> Remote Mount Driver <b>SP90</b> <sup>7</sup> Straight Arm <b>PA</b> <sup>7</sup> Mounting Arm Style <b>CEILING MOUNT</b> <b>RDC5</b> Small Driver Canopy <b>CP13</b> Large Driver Canopy <b>HM</b> <sup>8</sup> Hang Straight <b>AT</b> <sup>8</sup> Hang Straight All Thread <b>PM</b> <sup>8</sup> Rigid Pendant Mount <b>CD</b> <sup>8</sup> Cord / Cable Mount <b>CM</b> <sup>8</sup> Cord Mount <b>EMCR</b> <sup>9</sup> 10W Large Driver Canopy EM <b>EMRM</b> 7W Remote EM <b>EMEN</b> 7W Remote with Enclosure	<b>MW</b> <sup>11</sup> Matte White <b>MB</b> <sup>11</sup> Matte Black <b>PT</b> <sup>11</sup> Platinum Silver <b>CC</b> Custom Color	<b>WLKA</b> Wet Location Kit
		90 CRI					

EXAMPLE: SV1007GV15L35KEXTF1/CP104PA15BZ

**NOTES:**  
 1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 Available with CP106/CP13 Only 4 Enclosure, Wire Guard Required - Choose One Option  
 5 Standard Enclosure 6 See Mounting Page for Details on Components and Finishes 7 See Mounting Page for Available Arm Options 8 Specify Length in Inches: See Mounting Page for Available Lengths 9 EMCR Replaces RDC5 or CP13 10 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 11 Standard Finishes






# 10" STAGECOACH SHADE DAMP / WET LOCATION CLASSIC SHAPES

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS <sup>1</sup>	DELIVERED LUMENS <sup>2</sup>	SYSTEM WATTS	LPW
SV1007GV15L	1500	1101	10	110
SV1007GV27L	2700	1922	18	107

<sup>1</sup> Nominal Source Lumens at 35K    <sup>2</sup> Nominal Delivered Lumens at 35K

## HOUSING DIMENSIONS

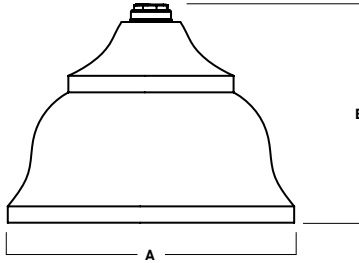

A	B
10.1 256.1 mm	8.0 203.2 mm

## APPLICATION

The Stagecoach Shade RLM has a classic bell shape for decorative downlighting.

## FEATURES

Spectrum Lighting's RLM Classics are inspired by vintage lighting fixtures redesigned with modern LED light sources and materials. The wide range of options for illumination, mounting, enclosures, guards and finishes allows for creative fixture specification and design. LED module and driver are serviceable for future replacement.

## FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Matte White interior standard.

## ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.


## CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Wall mount canopies are die-cast aluminum with stainless steel hardware. Wall arms are formed 3/4 NPT aluminum pipe and may be field cut.

## CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Wet Location Option. Manufactured and tested to UL standards No. 1598/8750.

## ENCLOSURES

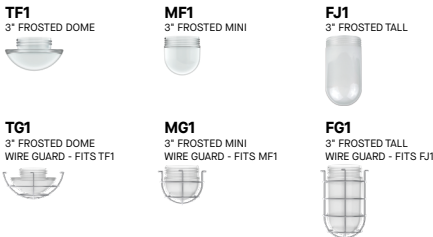

## WALL MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & DIMENSIONS.)

PA\_  
MOUNTING ARM STYLE



SV1007GV SHOWN WITH CP104PA23

## CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM  
HANG STRAIGHT / ALL THREAD / PENDANT



SV1007GV SHOWN WITH RDC5PM

CD  
CORD / CABLE MOUNT



SV1007GV SHOWN WITH RDC5CD

CM  
CORD MOUNT



SV1007GV SHOWN WITH RDC5CM





**10" STAGECOACH SHADE**  
**DAMP / WET LOCATION**  
 CLASSIC SHAPES / PHOTOMETRIC DATA

SV1007GV-27L-35K-EX-TF1-MWI

CANDLEPOWER CURVE	INTENSITY	ZONAL LUMENS		SINGLE UNIT: PERFORMANCE INITIAL FOOTCANDLES BASED ON IES BEAM ANGLE				MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT											
		0° - 10°	0° - 20°	0° - 30°	0° - 40°	0° - 60°	0° - 80°	0° - 90°	Total	Mounting Height AFF	FC at Center on Floor	Beam Diameter	FC at Beam Edge	Ceiling Height	Fixture Spacing	RCR 2		RCR 4	
	0.00°																		
	0.00°	842	80	4%															
	5.00°	834	301	16%										8'	8'	23	0.24	19	0.24
	10.00°	815	624	32%						5.50'	28 fc	14.1'	10 fc	12'	10'	20	0.20	16	0.20
	15.00°	784	1,005	52%						6.50'	20 fc	16.7'	7 fc	16'	12'	13	0.14	7	0.09
	20.00°	745	1,706	89%						7.50'	15 fc	19.2'	6 fc	Delivered Illuminance Rating: (DIR)					
	30.00°	655	1,910	99%						8.50'	12 fc	21.8'	4 fc	99 FC per W/Sq. Ft.    79 FC per W/Sq. Ft.					
	40.00°	565	1,921	100%						10.00'	8 fc	25.6'	3 fc	2' Suspension Length Square rooms used for multiple units: - RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00' - RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50' * Average Footcandles at 2.5' Above Floor ** Exceeds spacing criteria by 99% *** Exceeds spacing criteria by 16%					
	50.00°	448	1,921	100%						12.00'	6 fc	30.8'	2 fc						
	60.00°	227	1,921	100%						14.00'	4 fc	35.9'	2 fc						
	70.00°	82	1,921	100%						16.00'	3 fc	41.0'	1 fc						
80.00°	21																		
90.00°	1																		

Delivered Lumens: 1,921  
 Luminaire Watts: 18  
 LER: 106.72

CP at 0deg (Nadir): 842  
 CRI: 85+

Beam Angle: 102.99  
 Spacing Ratio: 1.15

Lamp Multiplier: 15L x 0.573  
 CCT Multiplier: 27K x 0.971, 30K x 0.985, 40K x 1.03




# MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




## WALL MOUNTING

**CP104 - SMALL DRIVER CANOPY (STANDARD)**  
MAY BE USED AS SPLICE BOX FOR DIRECT FEED  
NOT AVAILABLE W/ PA16 & PA16F




**CP106 - LARGE DRIVER CANOPY**  
MAY BE USED AS SPLICE BOX FOR DIRECT FEED



**CP6/RMD - REMOTE MOUNT DRIVER**  
MOUNTS DIRECTLY TO WALL OR OCTAGON STYLE J-BOX




CUSTOM AND OTHER WALL ARMS AVAILABLE - CONTACT FACTORY. ARMS MAY BE FIELD CUT ON WALL SIDE - FIXTURE SIDE THREADED 3/4" NPT REQUIRES SEALANT FOR WET LOCATION.

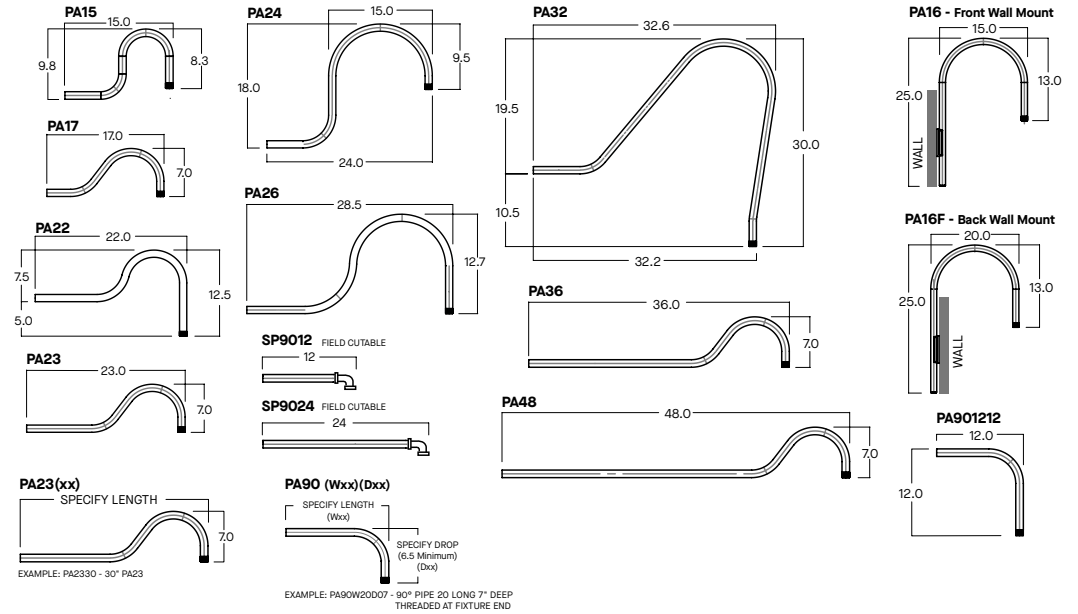


## CEILING MOUNTING


**RDC5 - SMALL DRIVER CANOPY (STANDARD)**  
MOUNTS TO 4" OCTO J-BOX



**CP13 - LARGE DRIVER CANOPY**




**HM\***  
HANG STRAIGHT  
45° SWIVEL 5/8" OD STEM - 3/8" IP




ORDER: HM (Length)  
SPECIFY LENGTH:  
HM3 - 3" HM24 - 24"  
HM6 - 6" HM36 - 36"  
HM12 - 12" HM48 - 48"  
HM18 - 18" HM72 - 72"  
HMLC(XX)  
Custom Length  
(Specify in Inches)

**PM\***  
RIGID PENDANT MOUNT  
RIGID 5/8" OD STEM - 3/8" IP




ORDER: PM (Length)  
SPECIFY LENGTH:  
PM3 - 3" PM24 - 24"  
PM6 - 6" PM36 - 36"  
PM12 - 12" PM48 - 48"  
PM18 - 18" PM72 - 72"  
PMLC(XX)  
Custom Length  
(Specify in Inches)

**AT\*\***  
HANG STRAIGHT ALL THREAD  
45° SWIVEL 5/8" OD STEM - 1/4" IP



ORDER: AT (Length)  
SPECIFY LENGTH:  
AT12 - 12"  
AT24 - 24"  
AT36 - 36"  
AT48 - 48"  
AT60 - 60"  
AT72 - 72"  
FIELD CUTTABLE  
FIELD LENGTH NEEDED  
CUT PIPE COVER - 1/4" SHORTER  
THAN THREADED PIPE  
SLIP PIPE COVER OVER THREADED PIPE

**CD**  
CORD / CABLE MOUNT  
SJ CORD WITH 1/16 SS CABLE



ORDER: CD (Length)  
SPECIFY LENGTH:  
CD36 - 36"  
CD72 - 72"  
CD144 - 144"  
CDLC(XX)  
Custom Length  
(Specify in Inches)

**CM**  
CORD MOUNT  
SJ CORD WITH STRAIN RELIEF




ORDER: CM (Length)  
SPECIFY LENGTH:  
CM36 - 36"  
CM72 - 72"  
CM144 - 144"  
CMLC(XX)  
Custom Length  
(Specify in Inches)

\*MAXIMUM ONE PIECE STEM LENGTH IS 72". \*\*MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.  
\*\*ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT


## EMERGENCY BATTERY OPTIONS

**EMCR - LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY**




## REMOTE EMERGENCY BATTERY OPTIONS

**EMRM\* - 7W REMOTE EMERGENCY BATTERY (50' MAX)**



A	B	C
1.3	12.6	13.0

**EMEN\* - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)**



A	B	C
2.0	17.0	6.2

\*OTHER EM BATTERY SIZES AVAILABLE. CONTACT FACTORY.

