



DECORATIVE

**DUO ESPRESSO**  
**DAMP LOCATION**  
 GV SERIES

PROJECT: \_\_\_\_\_

QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_



ME0709GV  
 MB - Matte Black  
 MWI - Matte White Interior



ME0604GV  
 MB - Matte Black  
 MWI - Matte White Interior



ME0709GV  
 CO - Copper Metallic  
 MWI - Matte White Interior



ME0709GV  
 PT - Platinum Silver  
 MWI - Matte White Interior



ME0604GV  
 CO - Copper Metallic  
 MWI - Matte White Interior



ME0604GV  
 PT - Platinum Silver  
 MWI - Matte White Interior

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING <sup>2</sup>	MOUNTING <sup>3</sup>	INTERIOR <sup>6</sup>	FINISH <sup>6</sup>
ME0604GV ME0709GV	15L 27L	1100 Lm 2000 Lm	<b>EX</b> Electronic Driver, 120V/277V <b>DX</b> 1%, 0-10V, 120V/277V <b>DS2W1</b> ELV/TRIAC, 120V	<b>RDC5</b> Small Driver Canopy <b>HM_4</b> Hang Straight <b>AT_4</b> Hang Straight All Thread <b>PM_4</b> Rigid Pendant Mount <b>CD_4</b> Cord / Cable Mount <b>CM_4</b> Cord Mount <b>EMCR<sup>5</sup></b> 10W Canopy Mounted EM <b>EMRM</b> 7W Remote EM <b>EMEN</b> 7W Remote with Enclosure	<b>MW1</b> Matte White <b>CCI</b> Custom Color <b>FCI</b> Fixture Color Interior	<b>MW</b> Matte White <b>MB</b> Matte Black <b>PT</b> Platinum <b>CC</b> Custom Color

EXAMPLE: ME0709GV27L30KEX/RDC5CD36MWIMW

**NOTES:**  
 1 Normal Delivered Lumens at 35K 2 Contact Factory for Additional Options 3 See Mounting Page for Details on Components and Finishes 4 Specify Length in Inches:  
 See Mounting Page for Available Lengths 5 EMCR replaces RDC5 6 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 7 Standard Finishes







DECORATIVE

**DUO ESPRESSO**  
**DAMP LOCATION**  
**GV SERIES**

LUMENS / WATTAGE DATA			
PART NUMBER	DELIVERED LUMENS <sup>1</sup>	SYSTEM WATTS	LPW
ME0604GV 15L	1128	10	113
ME0604GV 27L	1979	18	110
ME0709GV 15L	854	10	85
ME0709GV 27L	1494	18	83

<sup>1</sup> Normal Delivered Lumens at 3500K

**HOUSING DIMENSIONS**



SERIES	A	B	C
ME0604GV	6.0	6.0	4.7

SERIES	A	B
ME0709GV	7.4	9.2

**APPLICATION**

Speculume Decorative enriches the Espresso Series with the addition of Duo Espresso, a pair of fixtures with a range of options for lighting customization. Created to not only deliver exceptional luminance but a compliment to the larger fixtures in this series.

**FEATURES**

Speculume series fixtures offer contemporary style with functional luminaire performance. Fixtures designed and manufactured in our factory featuring a passive integral heat sink, frosted polymer diffuser, LED module, replaceable and upgradable drivers, and a variety of mounting options.

**FINISH**

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes. Interior is Matte White unless specified. Custom Color interior finish available.

**ELECTRONICS**

LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80/90. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

**CONSTRUCTION**

Fixtures are spun in our factory from 0.063 high purity aluminum. Passive machined aluminum heat sink for optimal thermal management.

**CODE COMPLIANCE**


BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

**SERIES SIZES**

ME0604GV



ME0709GV

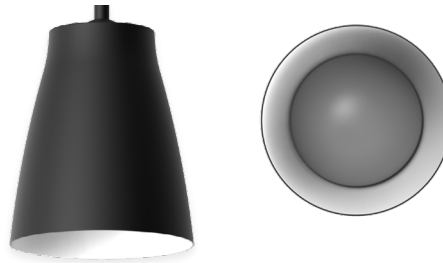

**CEILING MOUNT**

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

**HM / AT / PM**

HANG STRAIGHT / ALL THREAD / PENDANT



ME0709GV SHOWN WITH RDC5PM

**CD**

CORD / CABLE MOUNT



ME0709GV SHOWN WITH RDC5CD

**CM**

CORD MOUNT



ME0709GV SHOWN WITH RDC5CM






# DUO ESPRESSO

## DAMP LOCATION


### GV SERIES / PHOTOMETRIC DATA

DECORATIVE

ME0604GV 27L 35K EX MWI

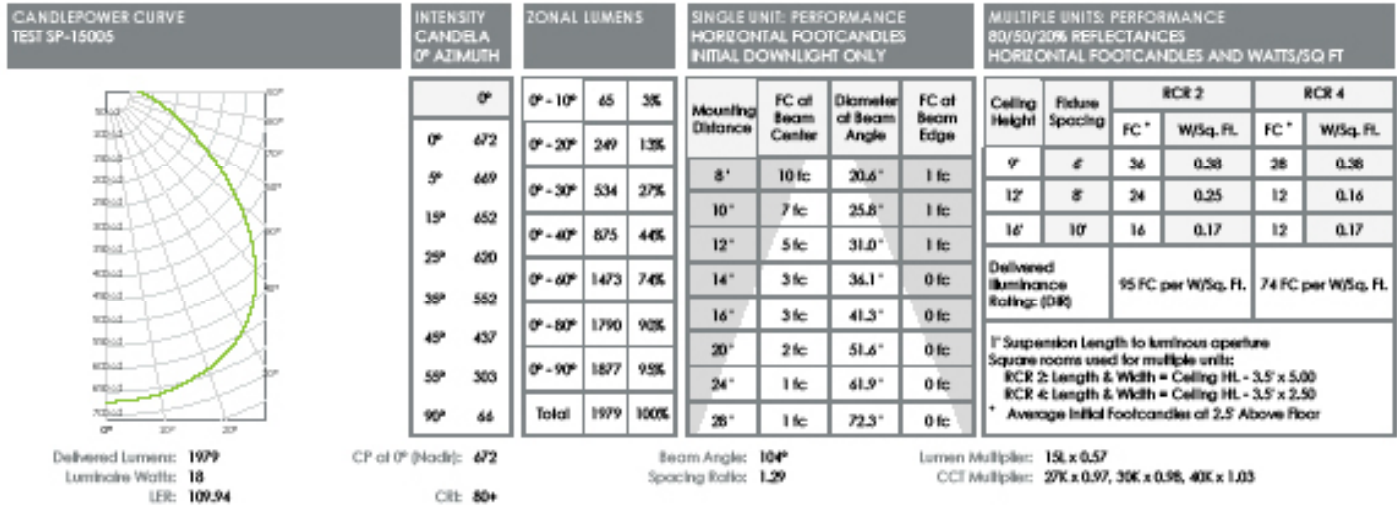

ME0709GV 27L 35K EX MWI

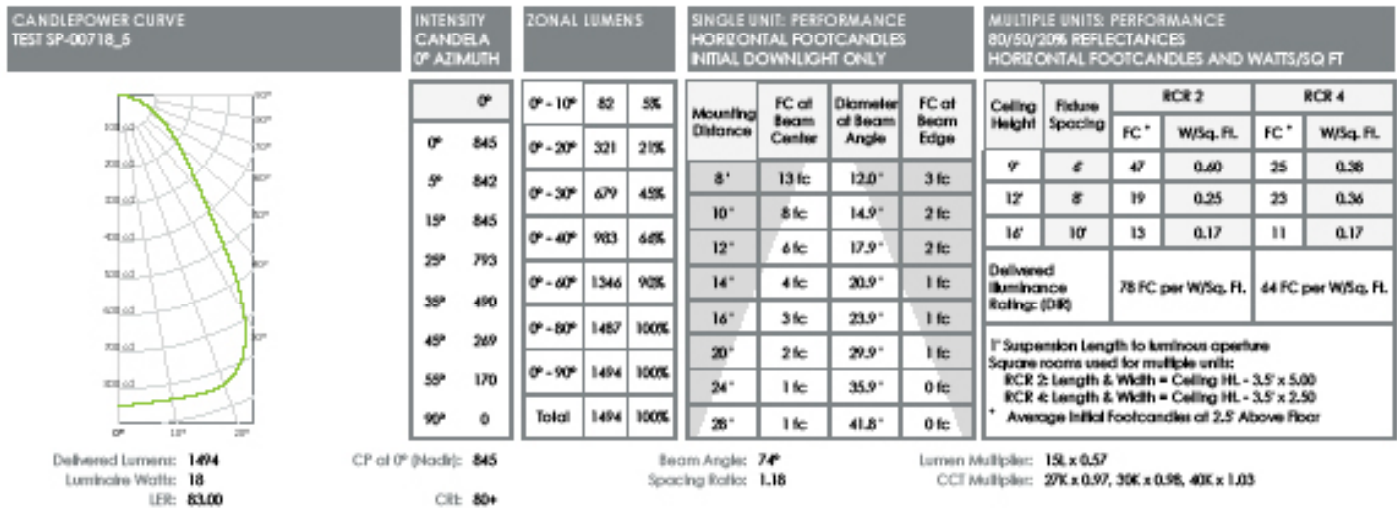

# MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES. CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF SPECULUME SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



## CEILING MOUNTING

<p><b>RDC5</b> - SMALL DRIVER CANOPY (STANDARD) MOUNTS TO 4" OCTO J-BOX</p>	<p><b>HM*</b> HANG STRAIGHT 45° SWIVEL 1/2" STEM - 3/8" NPT</p> <p>ORDER: <b>HM</b> (Length) SPECIFY LENGTH: <b>HM3</b> - 3"    <b>HM24</b> - 24" <b>HM6</b> - 6"    <b>HM36</b> - 36" <b>HM12</b> - 12"    <b>HM48</b> - 48" <b>HM18</b> - 18"    <b>HM72</b> - 72"</p> <p><b>HMLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>AT**</b> HANG STRAIGHT ALL THREAD 45° SWIVEL 1/2" STEM - 1/4" IP</p> <p>ORDER: <b>AT</b> (Length) SPECIFY LENGTH: <b>AT12</b> - 12"    <b>AT48</b> - 48" <b>AT24</b> - 24"    <b>AT60</b> - 60" <b>AT36</b> - 36"    <b>AT72</b> - 72"</p> <p><small>FIELD CUT THREADED PIPE TO LENGTH REQUIRED. IF SHORTER CUT THE COUPLER. SUPPLY COUPLER OVER THREADED PIPE.</small></p>	<p><b>PM*</b> RIGID PENDANT MOUNT RIGID 1/2" STEM - 3/8" NPT</p> <p>ORDER: <b>PM</b> (Length) SPECIFY LENGTH: <b>PM3</b> - 3"    <b>PM24</b> - 24" <b>PM6</b> - 6"    <b>PM36</b> - 36" <b>PM12</b> - 12"    <b>PM48</b> - 48" <b>PM18</b> - 18"    <b>PM72</b> - 72"</p> <p><b>PMLLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>CD</b> CORD / CABLE MOUNT SJ CORD WITH 1/16" SS CABLE</p> <p>ORDER: <b>CD</b> (Length) SPECIFY LENGTH: <b>CD36</b> - 36" <b>CD72</b> - 72" <b>CD144</b> - 144"</p> <p><b>CDLC(XX)</b> Custom Length (Specify in Inches)</p>	<p><b>CM</b> CORD MOUNT SJ CORD WITH STRAIN RELIEF</p> <p>ORDER: <b>CM</b> (Length) SPECIFY LENGTH: <b>CM36</b> - 36" <b>CM72</b> - 72" <b>CM144</b> - 144"</p> <p><b>CMLC(XX)</b> Custom Length (Specify in Inches)</p>
---	---	---	---	---	--

\*MAXIMUM ONE PIECE STEM LENGTH IS 72". \*\*MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS. \*\*ORDER IN 12" INCREMENTS. ODD SIZES MAY BE FIELD CUT

## EMERGENCY BATTERY OPTIONS

**EMCR** - LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY (FOR ROUND CEILING MOUNT TYPES)

## REMOTE EMERGENCY BATTERY OPTIONS

<p><b>EMRM*</b> - 7W REMOTE EMERGENCY BATTERY (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>1.3</td> <td>12.6</td> <td>13.0</td> </tr> </tbody> </table>	A	B	C	1.3	12.6	13.0	<p><b>EMEN*</b> - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>2.0</td> <td>17.0</td> <td>6.2</td> </tr> </tbody> </table>	A	B	C	2.0	17.0	6.2
A	B	C											
1.3	12.6	13.0											
A	B	C											
2.0	17.0	6.2											

\*OTHER EM BATTERY SIZES AVAILABLE. CONSULT FACTORY

