





14" ROUND REMODEL PLATFORM

XT SERIES / 5000 LUMENS MAX

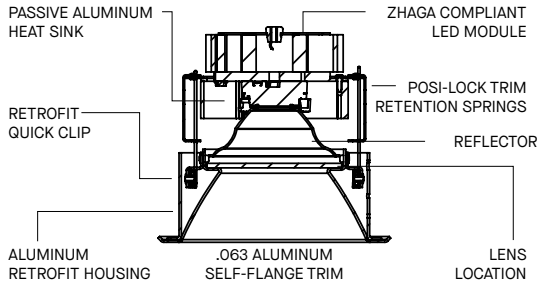

FIT SIZE	
SERIES	14"
MINIMUM	13 ^{3/8}
MAXIMUM	14 ^{5/8}



A	B	C
14.0 355.6 mm	15.2 386.1 mm	10L-20L: 7.2 30L: 7.9 40L-50L: 7.7

Ceiling Outcut: Ø 13.8"

SGRTE14XT - TRIM FLANGE / NON-IC RATED

APPLICATION

Round XT focused illumination series LED downlight for high performance retrofit or remodel application.

FEATURES

Remodel round downlight housing designed for install in finished "hard" ceiling or into existing precut hole. Quick mount remodel spring clips with mechanical lock down. Return edge to seat fixture in ceiling. Fixture will work in up to 1" thick ceiling¹. Quick change LED module with interchangeable optics for job site flexibility and fixture maintenance. Tool-less driver and j-box access. Posi-lock trim retention torsion springs.

TRIM FINISH

A variety of architectural powdercoat and anodized finishes are available. Matte White flange is standard.

ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent, stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2-step MacAdam Ellipse binning. High CRI is 98 with 1x2-step MacAdam Ellipse binning. Variety of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Housing/frame constructed of .060" aluminum to resist corrosion. Self-flanged one piece trim spun from 0.060" thick high purity aluminum and finished to specification.

CODE COMPLIANCE

BAA Compliant. Non-IC rated. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Optional Wet location. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE / LUMENS DATA		
PART NUMEBR	SOURCE LUMENS ²	SYSTEM WATTS
SGRTE14XT10L	1000	11.1
SGRTE14XT13L	1300	15.0
SGRTE14XT20L	2000	23.7
SGRTE14XT30L	3000	34.6
SGRTE14XT40L	4000	39.9
SGRTE14XT50L	5000	54.0

SERIES	LUMENS ²	CCT	BEAM	DRIVER / VOLTAGE ⁴	OPTIONS ⁷	TRIM	FINISH	TRIM OPTIONS		
SGRTE14XT	83 CRI		ND 27° MD 46° WD 50° XW 52°	E_ Electronic Driver DS10_ 10% 0-10V DO10_ 1% 0-10V DS2W1 1%, ELV/MLV, 120V DL3E_ ⁵ 1% Lutron® EcoSystem®, Fade EL10_ 1%, eldoLED EDO1_ 0.1%, eldoLED DALI_ DALI Control DMXS ⁶ DMX Standard Configuration DMXC ⁶ DMX Non-Standard Custom	1 120V 2 277V FS Fusing EM Emergency Battery CR Corrosion Resistant GR Goof Ring	AR1466XT	SG ⁸ Semi-Diffuse HZ Haze Full Diffuse MW Matte White MB Matte Black PT Platinum Silver OB Oil Rubbed Bronze CH Charcoal AC Anodic Champagne AS Anodic Sapphire AM Anodic Malachite SN Sun Gold CO Copper Metallic GH Graphite AMB Anti Microbial Finish CC ⁹ Custom Color	SO ¹⁰ Micro Prism GL ¹¹ Clear Glass Lens FG Frosted Glass Lens PF ¹² Polished Flange WL Wet Location		
	10L	1000 Lm							27K	2700K
	13L	1300 Lm							30K	3000K
	20L	2000 Lm							35K	3500K
	30L	3000 Lm							40K	4000K
	40L	4000 Lm								
	50L	5000 Lm								
	98 CRI ³									
	10L	1000 Lm	27HK	2700K						
	13L	1300 Lm	30HK	3000K						
	20L	2000 Lm	35HK	3500K						
	30L	3000 Lm	40HK	4000K						

EXAMPLE: SGRTE14XT13L35KMDE1/AR1466XTSG

NOTES:
 1 Consult Factory for Thicker Ceiling 2 Nominal Source Lumens at Any CCT 3 98CRI Operates at Higher Watts then 83CRI 4 Contact Factory for Additional Options 5 50L Not Available with Lutron Drivers 6 Contact Factory 7 See Product Options Page For Details 8 Standard Finish 9 Contact Factory for Special Finishes 10 Standard Lens for MD, WD, XW 11 Standard Lens for ND 12 Flange and Reflector Same Finish

PROJECT: _____
 TYPE: _____

