



**4" ROUND DIRECT**  
**WET LOCATION**  
 GAMMA SERIES

PROJECT: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_



CW0406PC



CW0412PC



CW0418PC

SERIES	LUMENS <sup>1</sup>	CCT	OPTICS	DRIVER / DIMMING <sup>2</sup>	LENS	MOUNTING <sup>3</sup>	FINISH <sup>6</sup>
<b>CW0406PC</b> 4" x 6"	<b>10L</b> 550 Lm	80 CRI	<b>ND</b> 21° <b>MD</b> 27° <b>WD</b> 49° <b>XW</b> 58°	<b>EX</b> Electronic Driver, 120V/277V <b>DO10X</b> 1%, 0-10V, 120V/277V <b>DS2W1</b> ELV/MLV, 120V	<b>CL</b> Clear Glass Lens <b>SO</b> Micro Prism Solite™ Lens	<b>HM</b> <sup>4/5</sup> Hang Straight <b>PM</b> <sup>4/5</sup> Rigid Pendant Mount <b>SM</b> Surface Mount	<b>MW</b> <sup>7</sup> Matte White <b>MB</b> <sup>7</sup> Matte Black <b>PT</b> <sup>7</sup> Platinum Silver <b>CC</b> Custom Color
	<b>15L</b> 800 Lm	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K					
<b>CW0412PC</b> 4" x 12"	<b>20L</b> 1100 Lm	90 CRI				EMERGENCY BATTERY OPTIONS	See Page 6 for Full Range of Color Options (83-90165)
		<b>27HK</b> 2700K <b>30HK</b> 3000K				<b>EMRM</b> 7W Remote EM <b>EMEN</b> 7W Remote with Enclosure	
<b>CW0418PC</b> 4" x 18"							

EXAMPLE: CW0406PC15L35KNDEX/CL/HM36/MW

**NOTES:**  
 1 Nominal Delivered Lumens at 3500K 2 Consult Factory for Additional Options 3 See Mounting Page for Details on Components and Finishes 4 Specify Length in Inches: See Mounting Page for Available Lengths 5 Not for Use in Locations with Wind Exposure 6 See Color Page for More Options/Consult Factory for Special Finishes 7 Standard Finishes






# 4" ROUND DIRECT WET LOCATION GAMMA SERIES

LUMENS / WATTAGE DATA			
PART NUMBER	DELIVERED LUMENS	SYSTEM WATTS	LPW
CW0412PC 10L	549	6.5	84
CW0412PC 15L	813	9.5	86
CW0412PC 20L	1098	12.9	85

1 Nominal Delivered Lumens at 3500K, 80 CRI, Medium Optic with Clear Lens

## DIMENSIONS



Dimensioned with **CW0412PC**

SERIES	A	B
<b>CW0406PC</b>	4.1	6.4
<b>CW0412PC</b>	4.1	12.4
<b>CW0418PC</b>	4.1	18.4

## APPLICATION

The Gamma Family of Cylinders are a robust offering of point source LED luminaires featuring high efficacies, an assortment of optical control, and installation flexibility, which make them suitable for a wide range of commercial and institutional applications.

## ELECTRONICS

Solid-state light engine available in various color temperatures and lumen outputs. Specifiable in 2700K, 3000K, 3500K, 4000K in CRI 80 (Typ.), or 2700K, 3000K in CRI 90 (Typ.), color accuracy  $\leq 3$  SDCM. Selection of integral electronic constant current, dimmable drivers available, power factor  $> 0.9$  (Typ.). Driver and light engine are field serviceable for future replacement or upgrades. Emergency battery options provide 7W for 90 minutes.

## CONSTRUCTION

Seamless cylinder body machined from 6063 extruded aluminum. Trim and top cap are die-cast aluminum. Self-locating trim is secured with self-sealing stainless steel hardware. Nitrile rubber o-rings provide additional ingress protection from water. Passive aluminum heatsink optimized for emitter life and performance. Specular reflectors offered in variety of beam spreads. Lens type must be specified. Luminaire will not exceed 5 lbs.

## MOUNTING

All pendant options are specified in inches. Mounting bracket and canopies provided for direct installation with 4" octagonal junction boxes. Hang Mount (3/8"NPT) and Rigid Stem (3/8"IP) are 1/2" diameter and produced from steel pipe. Hang Mount option provides up to 45° tilt correction. Surface mount kit provided with aluminum mounting plate to install directly to junction box. See mounting page for additional information. Contact factory for special installation circumstances.

## FINISH

Multi-stage polyester powder-coat process applied on our in-house finishing department. Custom colors also available (contact factory with RAL#). Canopy and stems will match cylinder finish specification.

## CODE COMPLIANCE

ETL Listed. Suitable for wet locations with operation in ambient conditions up to 25°C. 5 year limited warranty on all components. Proudly designed and manufactured in Massachusetts, USA.

## SERIES SIZES

**CW0406PC**



**CW0412PC**



**CW0418PC**



## STANDARD FINISHES

SHOWN WITH CW0412PC

**MW**  
Matte White



**MB**  
Matte Black



**PT**  
Platinum Silver



## CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

**HM / PM**  
HANG STRAIGHT / PENDANT



CW0412PC SHOWN WITH PM

**SM**  
SURFACE MOUNT



CW0412PC SHOWN WITH SM





# 4" ROUND DIRECT

## GAMMA SERIES / PHOTOMETRIC DATA

### CW04XXPC 20L 35K ND XX CL XX

CANDLEPOWER CURVE TEST SP-01050	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE DIRECT FOOTCANDLES BASED ON DOWNLIGHT ONLY	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT	
	0°	0° - 10° 381 34%	Mounting Height AFF	Ceiling Height	
	0°	0° - 20° 798 71%	FC at Center on Floor	Fixture Spacing	
	5°	0° - 30° 1049 93%	Beam Diameter	RCR 4	
	15°	0° - 40° 1113 99%	FC at Beam Edge	FC * W/Sq. Ft.	
	25°	0° - 60° 1122 99%		FC * W/Sq. Ft.	
	35°	0° - 80° 1126 100%			
	45°	0° - 90° 1128 100%			
	55°	90° 1			
	90°	Total 1128 100%			
	Delivered Illuminance Rating: (DIR)		84 FC per W/Sq. Ft.		78 FC per W/Sq. Ft.
	2' Suspension Length to luminous aperture Square rooms used for multiple units: RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 RCR 6: Length & Width = Ceiling Ht. - 4.5' x 1.66 * Average Footcandles at 2.5' Above Floor				

Delivered Lumens: 1128  
Luminaire Watts: 12.9  
LER: 87.44

CP at 0° (Nadir): 5349  
CRt: 80

Beam Angle: 21°  
Spacing Ratio: 0.35

Lumen Multiplier: 10L x 0.50, 15L x 0.74  
CCT Multiplier: 27K x 0.97, 30K x 0.98, 40K x 1.04  
27HK x 0.78, 30HK x 0.82

### CW04XXPC 20L 35K MD XX CL XX

CANDLEPOWER CURVE TEST SP-01047	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE DIRECT FOOTCANDLES BASED ON DOWNLIGHT ONLY	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT	
	0°	0° - 10° 299 27%	Mounting Height AFF	Ceiling Height	
	0°	0° - 20° 744 68%	FC at Center on Floor	Fixture Spacing	
	5°	0° - 30° 1017 93%	Beam Diameter	RCR 3	
	15°	0° - 40° 1084 99%	FC at Beam Edge	FC * W/Sq. Ft.	
	25°	0° - 60° 1093 100%		FC * W/Sq. Ft.	
	35°	0° - 80° 1097 100%			
	45°	0° - 90° 1098 100%			
	55°	90° 1			
	90°	Total 1098 100%			
	Delivered Illuminance Rating: (DIR)		85 FC per W/Sq. Ft.		78 FC per W/Sq. Ft.
	2' Suspension Length to luminous aperture Square rooms used for multiple units: RCR 3: Length & Width = Ceiling Ht. - 4.5' x 3.33 RCR 5: Length & Width = Ceiling Ht. - 4.5' x 2.00 * Average Footcandles at 2.5' Above Floor *** Exceeds Spacing Ratio by 2%				

Delivered Lumens: 1098  
Luminaire Watts: 12.9  
LER: 85.12

CP at 0° (Nadir): 3785  
CRt: 80

Beam Angle: 27°  
Spacing Ratio: 0.45

Lumen Multiplier: 10L x 0.50, 15L x 0.74  
CCT Multiplier: 27K x 0.97, 30K x 0.98, 40K x 1.04  
27HK x 0.78, 30HK x 0.82

### CW04XXPC 20L 35K WD XX CL XX

CANDLEPOWER CURVE TEST SP-01072	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE DIRECT FOOTCANDLES BASED ON DOWNLIGHT ONLY	MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT	
	0°	0° - 10° 190 16%	Mounting Height AFF	Ceiling Height	
	0°	0° - 20° 643 53%	FC at Center on Floor	Fixture Spacing	
	5°	0° - 30° 1071 89%	Beam Diameter	RCR 2	
	15°	0° - 40° 1190 99%	FC at Beam Edge	FC * W/Sq. Ft.	
	25°	0° - 60° 1198 100%		FC * W/Sq. Ft.	
	35°	0° - 80° 1202 100%			
	45°	0° - 90° 1203 100%			
	55°	90° 1			
	90°	Total 1203 100%			
	Delivered Illuminance Rating: (DIR)		96 FC per W/Sq. Ft.		86 FC per W/Sq. Ft.
	2' Suspension Length to luminous aperture Square rooms used for multiple units: RCR 2: Length & Width = Ceiling Ht. - 4.5' x 5.00 RCR 4: Length & Width = Ceiling Ht. - 4.5' x 2.50 * Average Footcandles at 2.5' Above Floor				

Delivered Lumens: 1203  
Luminaire Watts: 12.9  
LER: 93.26

CP at 0° (Nadir): 2017  
CRt: 80

Beam Angle: 49°  
Spacing Ratio: 0.77

Lumen Multiplier: 10L x 0.50, 15L x 0.74  
CCT Multiplier: 27K x 0.97, 30K x 0.98, 40K x 1.04  
27HK x 0.78, 30HK x 0.82





# 4" ROUND DIRECT

## GAMMA SERIES / PHOTOMETRIC DATA

CW04XXPC 20L 35K XW XX CL XX

CANDLEPOWER CURVE TEST SP-01074	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS	SINGLE UNIT: PERFORMANCE DIRECT FOOTCANDLES BASED ON DOWNLIGHT ONLY				MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT											
			Mounting Height AFF	FC at Center on Floor	Beam Diameter	FC at Beam Edge	Ceiling Height	Fixture Spacing	RCR 1		RCR 3							
	0°																	
	0°	1547	0° - 10°	147	12%	8'	24 fc	8.7'	8 fc	14'	8'	21	0.21	19	0.21	Delivered Illuminance Rating: (DIR)	103 FC per W/Sq. Ft.	92 FC per W/Sq. Ft.
	5°	1544	0° - 20°	556	45%	10'	15 fc	10.9'	5 fc	18'	10'	12	0.12	9	0.10			
	15°	1473	0° - 30°	1039	85%	12'	11 fc	13.1'	4 fc	22'	12'	9	0.08	9	0.09			
	25°	1117	0° - 40°	1208	98%	14'	8 fc	15.3'	3 fc	2' Suspension Length to luminous aperture Square rooms used for multiple units: RCR 1: Length & Width = Ceiling Ht. - 4.5' x 10.00 RCR 3: Length & Width = Ceiling Ht. - 4.5' x 3.33 * Average Footcandles at 2.5' Above Floor								
	35°	232	0° - 60°	1222	100%	16'	6 fc	17.5'	2 fc									
	45°	8	0° - 80°	1226	100%	20'	4 fc	21.9'	1 fc									
	55°	3	0° - 90°	1227	100%	24'	3 fc	26.2'	1 fc									
	90°	1	Total	1227	100%	28'	2 fc	30.6'	1 fc									

Delivered Lumens: 1227  
 Luminaire Watts: 12.9  
 LER: 95.12

CP at 0° (Nadir): 1547  
 CRI: 80

Beam Angle: 58°  
 Spacing Ratio: 0.95

Lumen Multiplier: 10L x 0.50, 15L x 0.74  
 CCT Multiplier: 27K x 0.97, 30K x 0.98, 40K x 1.04  
 27HK x 0.78, 30HK x 0.82




# STANDARD MOUNTING & ACCESSORIES


SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.  
NOTE: THIS IS TYPICAL OF CYLINDERS SPECIFICATION FOR PENDANT MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.




## CANOPY DIMENSIONS

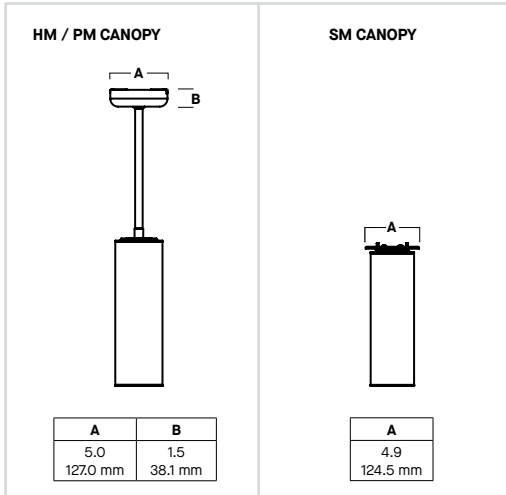

## MOUNTING TYPES

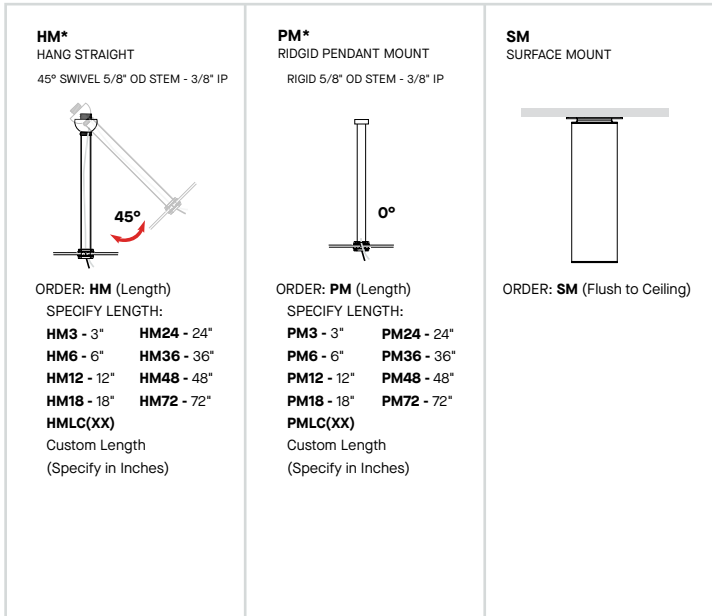

## REMOTE EMERGENCY BATTERY OPTIONS

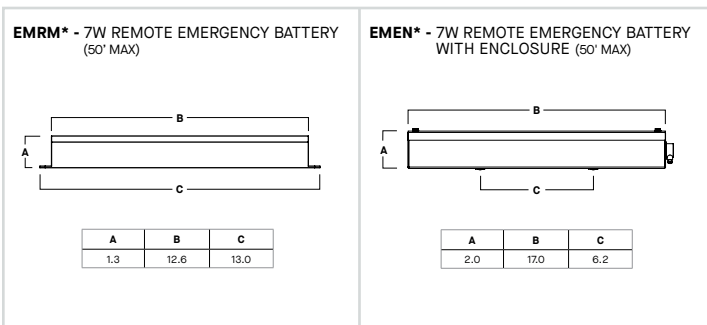

\*OTHER EM BATTERY SIZES AVAILABLE, CONSULT FACTORY



# COLOR OPTIONS - POWDER COAT PAINT FINISHES

NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL.  
SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



## STANDARD CORD / STEM / CANOPY FINISHES


FIXTURE COLOR	STANDARD CORD COLOR	STANDARD CANOPY / STEM COLOR
Matte White, Textured White	Matte White	Matte White
Gloss White	Matte White	Gloss White
Matte Black, Textured Black	Matte Black	Matte Black
All Others	Matte Black	Same Color as Fixture
Custom Color	Contact Factory	Contact Factory

## PAINT TIMES


TIER	COST	AVERAGE PAINT TIME*
Tier 1 - Standard Finishes	\$	⌚
Tier 2 - Typical Finishes	\$\$	⌚⌚
Custom Color	Contact Factory	Contact Factory

\*CONTACT FACTORY FOR SPECIFIC PRODUCT LEAD TIMES

## TIER 1 - STANDARD FINISHES

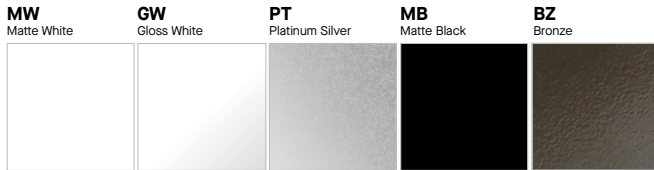

## TIER 2 - TYPICAL FINISHES

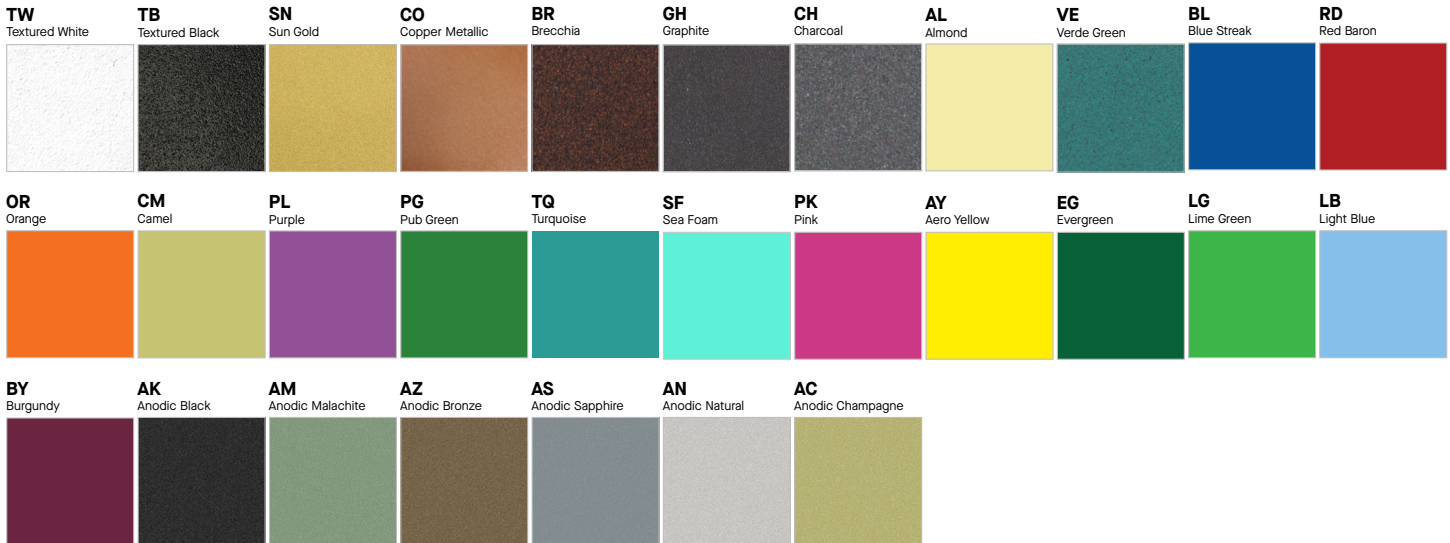

## CUSTOM COLOR FINISHES

CONTACT FACTORY

**CC**  
Custom Color



\*UNAVAILABLE FOR WET LOCATION

