



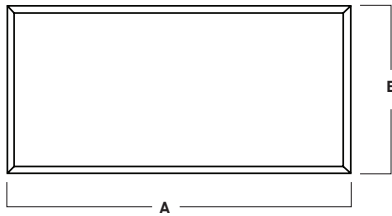

2' X 4' PANEL LIGHT
 DAMP LOCATION
 PANELUME

PROJECT: _____
 TYPE: _____

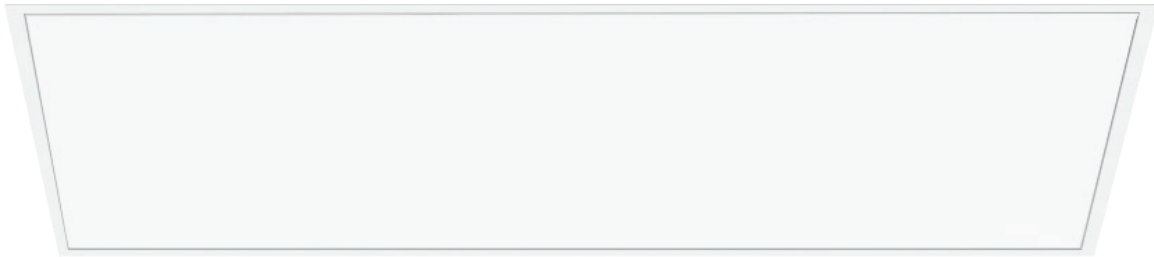

A	B	C
47.8	23.8	1.8
1213.0 mm	603.0 mm	45.0 mm

APPLICATION

Flat panel 1x4, 2x2, 2x4 series for grid ceiling installation and for general illumination.

ELECTRONICS

Switchable Multi Lumen (2500-8960) and Multi Kelvin (30K-65K) LED system simplifies ordering. 0-10V 1% dimming driver for control of light level. Emergency Battery optional.

CONSTRUCTION

Powder coated aluminum housing with diffuse white acrylic lens.

MOUNTING

Grid ceiling.

FINISH

Matte white powder coat.

WATTS	MULTI LUMEN		MULTI KELVIN	
	DELIVERED LUMENS		CCT	
20W	2500Lm		30K	3000K
25W	3200Lm		35K	3500K
30W	3850Lm		40K	4000K
35W	4480Lm		50K	5000K
40W	5120Lm		65K	6500K
50W	6400Lm			
60W	7680Lm			
70W	8960Lm			

SERIES	LUMENS	CCT	DRIVER /VOLTAGE	FINISH	EM OPTIONS
FP24	ML Multi Lumen	MK Multi Kelvin	DX 1%, 0-10V, 120V/277V	MW Matte White CC Custom Color	EM Emergency Battery Pack

EXAMPLE: FP24MLMKDXMW

