



3" SQUARE DOWNLIGHT N-LINE 3000 LUMENS MAX

UNIVERSAL HOUSINGS WITH INTERCHANGEABLE TRIMS

Spectrum's A Spec 3" recessed square downlight series features a shallow plenum housing and variety of trims for accent and general illumination.


LUMENS AND WATTAGE CHART					
PART NUMBER	LUMENS	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
SD3N	XT10L	1000	785	11.1	71
SD3N	XT13L	1300	1058	15	71
SD3N	XT20L	2000	1627	23.7	69
SD3N	XT30L	3000	2441	34.6	71

PROJECT: _____


QUANTITY: _____ TYPE: _____



Lensed

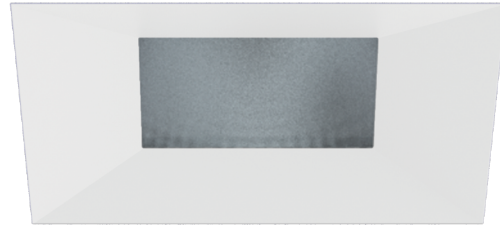

Open



Black Baffle




Wall Wash



AVAILABLE HOUSING TYPES


SS3NMO - New Construction / 30L Max



SS3NMI - IC New Construction / 20L Max



SS3NMR - Remodel Construction / 30L Max



Shown with N-Line Plaster Fitter

FIXTURE HOUSING SPECIFICATION

SERIES		LUMENS ¹		DRIVER / DIMMING / VOLTAGE		OPTIONS	
SS3NMO	New Construction	XT10L	1000 Lm	E_	Electronic Driver	1	120V
SS3NMI	IC New Construction	XT13L	1300 Lm	DS10_	10%, 0-10V	2	277V
SS3NMR	Remodel Construction	XT20L	2000 Lm	DO10_	1%, 0-10V		
		XT30L	3000 Lm	DS2W1	ELV/MLV, 120V		
		XN BEAM		DLTE1	1% Lutron® 2-Wire Forward Phase, 120V		
		XN10L	1000 Lm	DL3E_	1%, Lutron® EcoSystem® Fade		
		XN13L	1300 Lm	EL10_	1%, eldoLED		
				EDO1_	0.1%, eldoLED		
				BLU	Bluetooth LE		
						H12	12" - 24" Expandable Bars
						HO6	6" - 12" Expandable Bars
						BH27	27" Solid Bars
						CB24	24" C-Channel Bars
						CH24	24" Chicago Bars
						FS	Fusing
						EM	Integral Emergency Battery
						EMRM	Remote Emergency Battery Pack
						EB	Black Housing
						PR2	2" Thick Ceiling Adaptor

- Die-cast aluminum trim with a wide variety of options.
- Shallow plenum housing.
- Universal housing accepts all trim types, including F-Line self-flange.
- Performance Xicato LED module for superior reliability and color consistency.
- Large selection of dimming and control options.
- Interchangeable optics and lenses.
- See SS3D for 1" deep regress trim and SS3S for super shallow plenum.
- 5 year warranty on fixture and electronics.
- 10 year warranty on LED CCT.
- Bluetooth LE option.
- Sustainable fixture.
- Zhaga International Standard LED Module for future upgrades.
- 83CRI 2SDCM, 98CRI 1x2SDCM best in industry.

AVAILABLE TRIM / MODULE TYPES



TRIM / MODULE SPECIFICATION

TRIM		CCT		OPTICS		FINISH		OPTIONS	
SD3N	Downlight	83 CRI		XN	13°	MW	Matte White	NL	No Lens
SI3N	15° Adjustable	27K	2700K	ND	26°	MB	Matte Black	SO	Solite™ Micro Prism Lens
SW3N	Wall Wash	30K	3000K	MD	40°	PT	Platinum Silver	LW	Wall Wash Spread Lens
		35K	3500K	WD	47°	BZ	Bronze	GL	Clear Glass Lens
		40K	4000K	XW	62°	CH	Charcoal	FG	Frosted Glass Lens
		98 CRI ARTIST ³				OB	Oil Rubbed Bronze	BB	Black Baffle
		27HK	2700K			AS	Sapphire	PR2	2" Thick Ceiling Adaptor
		30HK	3000K			AM	Malachite	WL	Wet Location
		35HK	3500K			SN	Sun Gold		
		40HK	4000K			CO	Copper Metallic		
						GH	Graphite		
						CC	Custom Color		

EXAMPLE: SS3NMOXT10LDS2W1/H12/SD3N27KMDMWSO

NOTES:


1 Nominal Source Lumens at Any CCT 2 Nominal Delivered Lumens 83 CRI at Any CCT with WD-MW-GL Trim 3 20L Max 4 For 20L HK and 30L Options Install Fixtures in Accordance with the Following Marked Spacing: (a) Center To Center of Adjacent Luminaires: 600mm (24in); (b) Top of Luminaire to overhead Building Member: 39mm (1.5in); (c) Luminaire Center to side Building Member: 300mm (12in) 5 Not Available with HK 6 Not Available in IC 7 Contact Factory 8 XW Optic Only / LW Lens Only 9 9mm, 13L Max, All XN Draw More Watts Than Other Optics; See Photometry 10 Standard Finish 11 Contact Factory for Special Finishes 12 Standard Lens for Wall Wash



HOUSING DIMENSIONS

SS3NMO - NEW CONSTRUCTION / 30L MAX

Non-IC rated, thermally protected frame-in kit for new construction. Non-IC designation requires insulation must be minimum of 3" from housing.

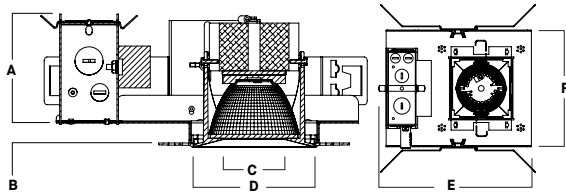


LED	A	B	C	D	E	F
XT10L	3.43	.625	1.95	3.89	9.6	7.6
XT13L	3.67	.625	1.95	3.89	9.6	7.6
XT20L	4.17	.625	1.95	3.89	9.6	7.6
XT30L	4.17	.625	1.95	3.89	9.6	7.6

Fixture Weight: 4.0 lbs

Ceiling Cutout: 4.12 Sq

SS3NMI - IC NEW CONSTRUCTION / 20L MAX

IC rated frame-in kit for new construction with direct insulation contact.

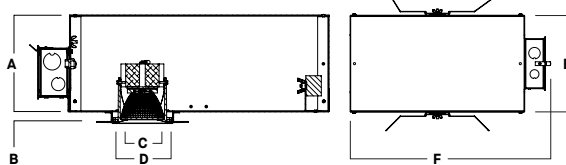


A	B	C	D	E	F
6.4	.625	1.95	3.89	9.5	10L-13L: 13.2
162.6 mm	15.9 mm	49.5 mm	98.8 mm	241.3 mm	20L: 19.2

Fixture Weight: 5.0 lbs

Ceiling Cutout: 4.12 Sq

SS3NMR - REMODEL CONSTRUCTION / 30L MAX

Non-IC rated frame-in kit for existing construction. Non-IC designation requires insulation must be minimum of 3" from housing.

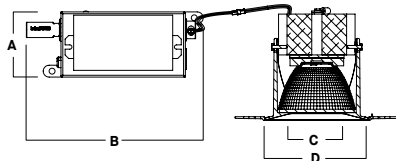

A	B	C	D
2.8	7.5	1.95	3.89
71.1 mm	190.5 mm	49.5 mm	98.8 mm

Fixture Weight: 2.0 lbs

Ceiling Cutout: 4" Sq

FEATURES

FRAME-IN KIT

Precision Die-formed 20 gauge galvanized steel housing and integral junction box with (3) 5/8", (3) 7/8" and (2) 1 1/8" knockouts. Junction box capacity: 8 12AWG rated for 90 °C. Tool-less driver and junction box access for ease of maintenance. Posi-loc trim retention springs for 5/8"-1" ceiling thickness. Use PR2 for up to 2" thick ceiling. For thicker ceilings consult factory.

MOUNTING

A variety of mounting bars are available (excluding remodel). Ceiling materials must be rigid to support luminaire frame.

DRIVER

Several constant current dimming drivers are available. Power factor >.9 typical, 50/60Hz, 350-1050mA.

TRIM

Flangeless, one-piece, die-cast aluminum finished in a variety of powdercoat options.

REMODEL

Features tethered power supply and junction box with sheathed wire.

LUMEN OUTPUT

XN narrow optic restricted to 1300 lumens max. All other optics and kelvins maintain 1000-3000 lumens range.

LED

Zhaga compatible high performance Xicato module. Proprietary phosphor technology provides consistent and stable color with CCT control of +/- 100K over life of light engine.

EMERGENCY

Integral or remote 7W emergency battery options are available. Operates for 90 minutes and produces nominal 450 lumens.

BLUETOOTH

Integral Bluetooth LE option is available for dimming to .1%, grouping, remote access, electrical feedback and beacon technology.

FUSING

Integral optional fast blow fuse with fuse holder.

COLOR VARIATION

Standard CRI (83) within 2-step MacAdam Ellipse. High CRI (98) within 1x2-step MacAdam Ellipse.

LISTINGS


ETL Certified to meet US and Canadian Standards. Manufactured and tested to UL standard No. 1598/8750. BAA compliant. Wet location (WL) and Insulated Ceiling (IC) options available.

WARRANTY

Fixtures, LEDs and drivers carry 5 year Spectrum warranty, as well as individual OEM warranty. Warranty is 5 years from date of manufacturing. LED system rated for operation in an ambient temperatures up to 25 °C.


TRIM / MODULE DATA

SD3N - DOWNLIGHT MODULE

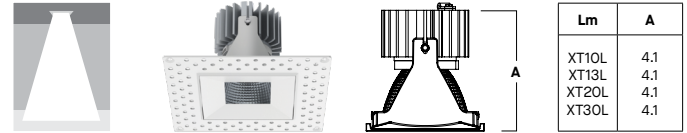


Lm	A
XT10L	4.1
XT13L	4.1
XT20L	4.1
XT30L	4.1

SI3N - 15° ADJUSTABLE MODULE

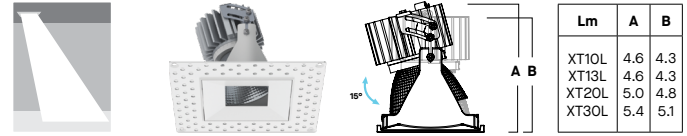

Lm	A	B
XT10L	4.6	4.3
XT13L	4.6	4.3
XT20L	5.0	4.8
XT30L	5.4	5.1

SW3N - WALL WASH MODULE

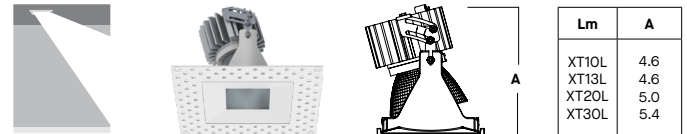


Lm	A
XT10L	4.6
XT13L	4.6
XT20L	5.0
XT30L	5.4



Spectrum Lighting

PHOTOMETRIC DATA - 3" SQUARE N-LINE

SS3NMx-XT30L-E1-SD3x-xxK-ND-MW-NL

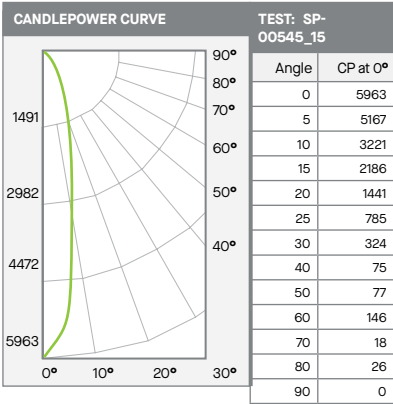

Delivered Lumens: 2511
Luminaire Watts: 34.6
LER: 73

CP @ 0° (Nadir): 5963
CRI: 83

Beam Angle	Zonal Lumens	%
0-10	496	20%
0-20	1283	51%
0-30	1874	75%
0-40	2175	87%
0-60	2359	94%
0-80	2499	100%
0-90	2511	100%
Total Lumens	2511	100%

Beam Angle: 22.3°
Spacing Ratio: 0.38

30L NARROW - 83 CRI

SINGLE UNIT: PERFORMANCE			
INITIAL FOOTCANDLES AND BEAM ANGLE DIAMETERS			
Mounting Height*	FC at Center	Diameter of Beam**	FC at Beam**
5.5'	197	2.2'	95
6.5'	141	2.6'	68
7.5'	106	3.0'	51
8.5'	83	3.4'	40
10'	60	3.9'	29
12'	41	4.7'	20
14'	30	5.5'	15
16'	23	6.3'	11

* From aperture to horizontal surface below.
** At IESNA defined Beam Angle, to 50% Max. CP.


FC Multipliers: 10L x 0.322, 13L x 0.433, 20L x 0.667
W/Sq. Ft. Multipliers: 10L x 0.320, 13L x 0.433, 20L x 0.685

MULTIPLE UNITS: PERFORMANCE					
80/50/20% REFLECTANCES					
INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT					
Ceiling Height	Fixture Spacing	RCR 8		RCR 10	
		FC*	W/Sq. Ft.	FC*	W/Sq. Ft.
8'	2.5'	73	1.38	52	1.08
12'	4'	49	0.92	46	0.96
16'	5'	41	0.78	39	0.81

Delivered Illuminance Rating: (DIR) 53 FC per W/Sq. Ft. 48 FC per W/Sq. Ft.

Square Rooms used for Multiple Units:
- RCR 8: Length & Width = Ceiling Ht. x 1.25
- RCR 10: Length & Width = Ceiling Ht. x 1.0
* Average Footcandles at floor

SS3NMx-XT30L-E1-SD3x-MD-MW-NL

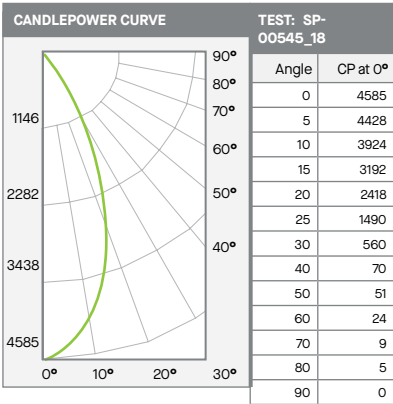

Delivered Lumens: 2361
Luminaire Watts: 34.6
LER: 68

CP @ 0° (Nadir): 4585
CRI: 83

Beam Angle	Zonal Lumens	%
0-10	411	17%
0-20	1315	56%
0-30	2052	87%
0-40	2258	96%
0-60	2341	99%
0-80	2359	100%
0-90	2361	100%
Total Lumens	2361	100%

Beam Angle: 41.3°
Spacing Ratio: 0.68

30L MEDIUM - 83 CRI

SINGLE UNIT: PERFORMANCE			
INITIAL FOOTCANDLES AND BEAM ANGLE DIAMETERS			
Mounting Height*	FC at Center	Diameter of Beam**	FC at Beam**
5.5'	152	4.1'	66
6.5'	109	4.9'	48
7.5'	82	5.7'	36
8.5'	63	6.4'	28
10'	46	7.5'	20
12'	32	9.0'	14
14'	23	10.6'	10
16'	18	12.1'	8

* From aperture to horizontal surface below.
** At IESNA defined Beam Angle, to 50% Max. CP.


FC Multipliers: 10L x 0.322, 13L x 0.433, 20L x 0.667
W/Sq. Ft. Multipliers: 10L x 0.320, 13L x 0.433, 20L x 0.685

MULTIPLE UNITS: PERFORMANCE					
80/50/20% REFLECTANCES					
INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT					
Ceiling Height	Fixture Spacing	RCR 4		RCR 6	
		FC*	W/Sq. Ft.	FC*	W/Sq. Ft.
8'	5'	50	0.78	45	0.79
12'	8'	39	0.62	45	0.78
16'	10'	22	0.35	25	0.44

Delivered Illuminance Rating: (DIR) 63 FC per W/Sq. Ft. 57 FC per W/Sq. Ft.

Square Rooms used for Multiple Units:
- RCR 4: Length & Width = Ceiling Ht. x 2.5
- RCR 6: Length & Width = Ceiling Ht. x 1.66
* Average Footcandles at floor

SS3NMRx-XT30L-E1-SD3x-WD-MW-NL

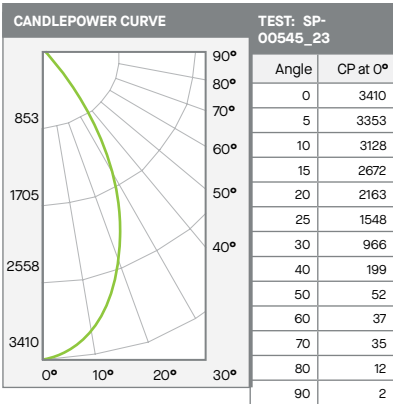

Delivered Lumens: 2441
Luminaire Watts: 34.6
LER: 71

CP @ 0° (Nadir): 3410
CRI: 83

Beam Angle	Zonal Lumens	%
0-10	312	13%
0-20	1065	44%
0-30	1818	75%
0-40	2232	91%
0-60	2374	97%
0-80	2435	100%
0-90	2441	100%
Total Lumens	2441	100%

Beam Angle: 47°
Spacing Ratio: 0.76

30L WIDE - 83 CRI

SINGLE UNIT: PERFORMANCE			
INITIAL FOOTCANDLES AND BEAM ANGLE DIAMETERS			
Mounting Height*	FC at Center	Diameter of Beam**	FC at Beam**
5.5'	113	4.8'	47
6.5'	81	5.7'	34
7.5'	61	6.5'	25
8.5'	47	7.4'	20
10'	34	8.7'	14
12'	24	10.4'	10
14'	17	12.2'	7
16'	13	13.9'	6

* From aperture to horizontal surface below.
** At IESNA defined Beam Angle, to 50% Max. CP.

FC Multipliers: 10L x 0.322, 13L x 0.433, 20L x 0.667
W/Sq. Ft. Multipliers: 10L x 0.320, 13L x 0.433, 20L x 0.685

MULTIPLE UNITS: PERFORMANCE					
80/50/20% REFLECTANCES					
INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT					
Ceiling Height	Fixture Spacing	RCR 2		RCR 4	
		FC*	W/Sq. Ft.	FC*	W/Sq. Ft.
8'	6'	56	0.78	49	0.78
12'	9'	25	0.35	22	0.35
16'	12'	14	0.20	12	0.20

Delivered Illuminance Rating: (DIR) 71 FC per W/Sq. Ft. 62 FC per W/Sq. Ft.

Square Rooms used for Multiple Units:
- RCR 2: Length & Width = Ceiling Ht. x 5.0
- RCR 4: Length & Width = Ceiling Ht. x 2.5
* Average Footcandles at floor

