



ESPRESSO PENDANTS



ESPRESSO PENDANTS

MINI ESPRESSO PENDANT



ME0713UDGV - DIRECT / INDIRECT
ME0713DGV - DIRECT ONLY



ESPRESSO PENDANT



ME1314UDGV - DIRECT / INDIRECT
ME1314DGV - DIRECT ONLY



ME1816UDGV - DIRECT / INDIRECT
ME1816DGV - DIRECT ONLY

- Styled with a unique hourglass shape that is both functional and decorative.
- Available as a direct downlight or with direct / indirect lighting up to 6000 lumens.
- Our LED systems are best in class and field replaceable for maintenance.

- Fixtures are hand spun in our factory from heavy gauge aluminum for long life durability.
- The choice of interior and exterior powdercoat finishes allows for easy customization.
- Internal diffuser lens obscures LED emitter for visual comfort.



MINI ESPRESSO PENDANTS SPECIFICATION GUIDE

MINI ESPRESSO PENDANTS																							
<p>ME0713DGV shown with HM</p>				<p>ME0713DGV shown with CD</p>				<p>ME0713DGV shown with CM</p>				<p>ME0713DGV shown with CD3X <small>Direct/Indirect Only Available with CD3X</small></p>				<p>ME0713DGV BOTTOM VIEW <small>TF1 Diffuser Standard</small></p>							
<table border="1"> <thead> <tr> <th>SERIES</th> <th>A</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>ME0713DGV</td> <td>7.5</td> <td>13.0</td> </tr> </tbody> </table>		SERIES	A	B	ME0713DGV	7.5	13.0																
SERIES	A	B																					
ME0713DGV	7.5	13.0																					
SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²			OPTIONS ⁴		MOUNTING ⁵			INTERIOR ⁶		FINISH ⁷										
ME0713UDGV Direct/Indirect	15L 27L	1500 Lm 2700 Lm	27K 30K 35K 40K	2700K 3000K 3500K 4000K	EX DO10X DLTE1 ¹ DL3EX ¹	Electronic Driver, 120V/277V 1%, 0-10V, 120V/277V Lutron® 2-Wire Forward Phase (MLV), 120V 1%, Lutron® EcoSystem®, Fades to Black, 120V/277V	DIRECT / INDIRECT 2CIR 2 Circuit FS Fusing	RDC5 CP13 CD3X ⁶ EMCR ⁷ EMRM EMEN	Small Driver Canopy Large Driver Canopy 3 Cable Mount with Cord 10W Canopy Mounted EM 7W Remote EM 7W Remote with Enclosure	MW ⁶ CCI FCI	Matte White Custom Color Fixture Color Interior	MW ⁶ MB ⁷ PT ⁸ CC	Matte White Matte Black Platinum Silver Custom Color										
ME0713DGV Direct							DIRECT ONLY FS 2 Circuit	DIRECT ONLY			See Back for Full Range of Color Options 		See Back for Full Range of Color Options 										
								HM ⁶ AT ⁶ PM ⁶ CD ⁶ CM ⁶	Hang Straight Hang Straight All Thread Rigid Pendant Mount Cord / Cable Mount Cord Mount														

NOTES:
 1 Normal Source Lumens at 35K 2 Contact Factory for Additional Options 3 Available with CP13 Only 4 See Product Options Page For Details 5 See Mounting Page for Details on Components and Finishes 6 Specify Length in Inches; See Mounting Page for Available Lengths
 7 EMCR Replaces RDC5 or CP13 8 See Color Page for More Options/Consult Factory for Special Finishes 9 Standard Finishes

ESPRESSO PENDANT SPECIFICATION GUIDE

ESPRESSO PENDANTS																							
<p>ME1314DGV shown with HM</p>				<p>ME1314DGV shown with CD</p>				<p>ME1314DGV shown with CM</p>				<p>ME1314DGV shown with DR13A</p>				<p>ME1314DGV BOTTOM VIEW</p>							
<table border="1"> <thead> <tr> <th>SERIES</th> <th>A</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>ME1314DGV ME1816DGV</td> <td>13.9 16.7</td> <td>14.4 18.1</td> </tr> </tbody> </table>		SERIES	A	B	ME1314DGV ME1816DGV	13.9 16.7	14.4 18.1																
SERIES	A	B																					
ME1314DGV ME1816DGV	13.9 16.7	14.4 18.1																					
SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²			DIFFUSER ³		OPTIONS ⁴		MOUNTING ⁵			INTERIOR ⁷		FINISH ⁷								
ME1314UDGV ME1816UDGV Direct/Indirect	UPLIGHT Direct/Indirect Only 15L 27L 37L	1500 Lm 2700 Lm 3700 Lm	27K 30K 35K 40K 50K	2700K 3000K 3500K 4000K 5000K	EX DO10X DLTE1 DL3EX	Electronic Driver, 120V/277V 1%, 0-10V, 120V/277V Lutron® 2-Wire Forward Phase (MLV), 120V 1%, Lutron® EcoSystem®, Fades to Black, 120V/277V	ENCLOSURES TF2 4" Frosted Dome (Standard) DOORS & LENSES DR Door (See Individual Specification Sheets for Ordering Details)	DIRECT / INDIRECT ONLY 2CIR 2 Circuit FS Fusing	RDC5 CP13 CD3X ⁶ EMCR ⁷ EMRM EMEN	Small Driver Canopy Large Driver Canopy 3 Cable Mount with Cord 10W Canopy Mounted EM 7W Remote EM 7W Remote with Enclosure	MW ⁶ CCI FCI	Matte White Custom Color Fixture Color Interior	MW ⁶ MB ⁷ PT ⁸ CC	Matte White Matte Black Platinum Silver Custom Color									
ME1314DGV ME1816DGV Direct	DOWNLIGHT 15L 27L 37L 55L	1500 Lm 2700 Lm 3700 Lm 5500 Lm						DIRECT ONLY FS 2 Circuit	DIRECT ONLY			See Back for Full Range of Color Options 		See Back for Full Range of Color Options 									
									HM ⁶ AT ⁶ PM ⁶ CD ⁶ CM ⁶	Hang Straight Hang Straight All Thread Rigid Pendant Mount Cord / Cable Mount Cord Mount													

NOTES:
 1 Normal Source Lumens at 35K 2 Contact Factory for Additional Options 3 TF2 Enclosure or Door & Lens Required - Choose One Option 4 See Product Options Page For Details 5 See Mounting Page for Details on Components and Finishes
 6 Specify Length in Inches; See Mounting Page for Available Lengths 7 See Color Page for More Options/Consult Factory for Special Finishes 8 Standard Finishes


1. CHOOSE FIXTURE & EMITTER TYPE ME1314DGV	2. CHOOSE APPLICATION: OUTPUT, CCT, DRIVER & DIFFUSER 15L 35K EX TF2	3. CHOOSE MOUNTING & COLOR PM12 MBI SN		
FULL EXAMPLE: ME1314DGV15L35KEXTF2PM12LGIWV				

COLOR OPTIONS - POWDER COAT PAINT FINISHES




NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.


TIER 1 STANDARD FINISHES

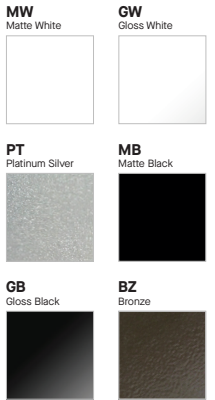

TIER 2 TYPICAL FINISHES

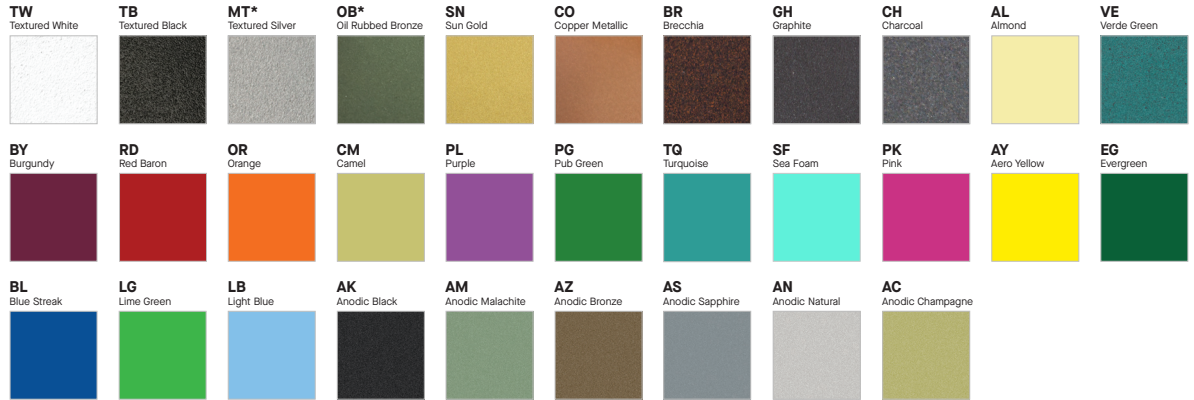

TIER 3 - SPECIAL METAL FINISHES

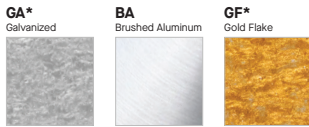


CUSTOM COLOR FINISHES



*UNAVAILABLE FOR WET LOCATION

MINI ESPRESSO DIRECT PHOTOMETRIC DATA

ME0713DGV-27L35K-EX-MWI

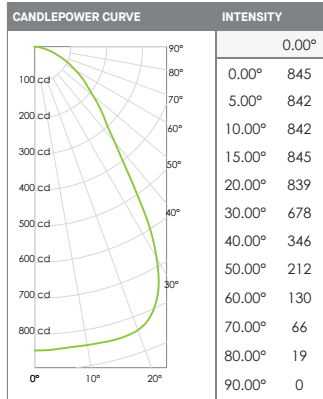


Delivered Lumens: 1,494 CP at 0deg (Nadir): 845
Luminaire Watts: 18 CRI: 80+
LER: 83.00

LUMENS / WATTAGE DATA		
PART NUMBER	DELIVERED LUMENS ¹	SYSTEM WATTS
ME0713DGV15L	854	10
ME0713DGV27L	1494	18

¹Nominal Delivered Lumens at 35K

MIINI ESPRESSO DIRECT / INDIRECT PHOTOMETRIC DATA

ME0713UDGV-27L27L35K-EX-MWI

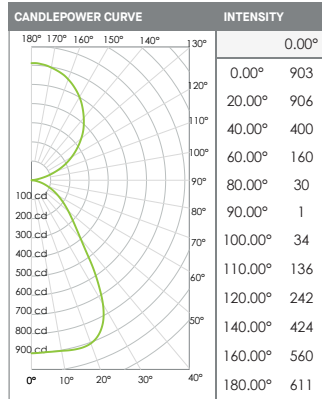


Delivered Lumens: 3,326 CP at 0deg (Nadir): 903
Luminaire Watts: 36 CRI: 80+
LER: 92.39

LUMENS / WATTAGE DATA		
PART NUMBER	DELIVERED LUMENS ¹	SYSTEM WATTS
ME0713UDGV15L15L	1896	20
ME0713UDGV27L27L	3326	36

¹Nominal Delivered Lumens at 35K

ESPRESSO DIRECT PHOTOMETRIC DATA

ME1314DGV-55L35K-EX-TF2

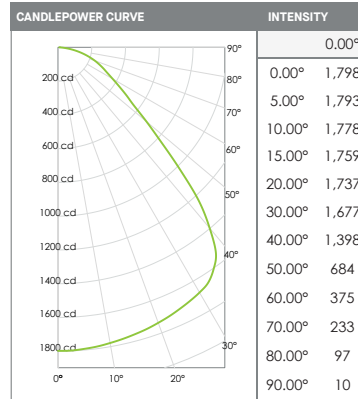


Delivered Lumens: 4,205 CP at 0deg (Nadir): 1,798
Luminaire Watts: 39 CRI: 80+
LER: 107.82

LUMENS / WATTAGE DATA		
PART NUMBER	DELIVERED LUMENS ¹	SYSTEM WATTS
ME1314DGV15L	1135	10
ME1314DGV27L	1934	18
ME1314DGV37L	2859	26
ME1314DGV55L	4205	30

¹Nominal Delivered Lumens at 35K

ESPRESSO DIRECT / INDIRECT PHOTOMETRIC DATA

ME1314UDGV-37LGL-55LTF2-35K-EX-MWI

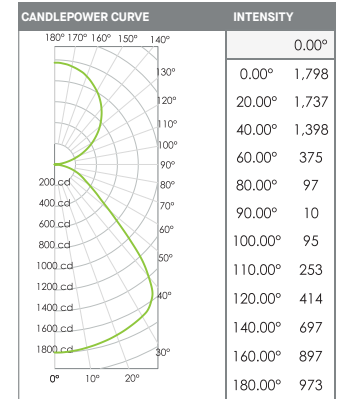

Delivered Lumens: 6,905 CP at 0deg (Nadir): 1,798
Luminaire Watts: 65 CRI: 80
LER: 106.23

LUMENS / WATTAGE DATA		
PART NUMBER	DELIVERED LUMENS ¹	SYSTEM WATTS
ME1314UDGV15L15L	2179	20
ME1314UDGV27L27L	3774	36
ME1314UDGV37L37L	5550	52
ME1314UDGV55L55L	6905	65

¹Nominal Delivered Lumens at 35K

ELECTRONICS

LED system features high brightness white LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Matte White interior standard. Custom Color interior finishes available.

CODE COMPLIANCE

BAA compliant. ETL certified to meet American and Canadian standards. Manufactured and tested to UL standards No. 1598/8750. Suitable for dry or damp locations. IES files available online.

