EASY DRIVER ACCESS

CHOICE OF INTERIOR FINISHES

INDIVIDUAL MODULES ROTATE 359° / TILT 40°

FLUSH FLAT FLANGED

RC4-ICLVFT - FLUSH FLAT FLANGED / IC RATED

APPLICATION

RC4 series MR16 Low Voltage modular fixture for retail, residential and commercial accent lighting.

FEATURES

Flush Flat Flanged for all ceiling types. Fixture available with 1-4 modules. Shallow 5" Plenum Depth. Fixture modules rotate 359°, lock and tilt to 40° for optimal aiming. Easy transformer and j-box access. Multi-bar adjustable mounting brackets. Posi-lock trim attachment. Front loading lamp bezel accepts up to two lens/louver options. Integral 0.625" collar, with Deep Ceiling Extension (PR) consult factory. Maximum wattage label (MWL) for low wattage Halogen or LED lamps.

TRIM FINISH

A variety of architectural powdercoat finishes for interior of fixture and trim are available.

ELECTRONICS

Electronic 120V transformer is standard. 277V electronic, 120V and 277V LED rated electronic and remote transformer options. High temperature rated porcelain GU10 socket. 37W per lamp max.

CONSTRUCTION

Housing formed #20 gauge galvanized steel, finished to specification. Trim fabricated from aluminum extrusion and finished to specification.

CODE COMPLIANCE

ARRA Compliant. Rated for direct contact with insulation. ETL/UL/CSA listed for damp locations. Manufactured and tested to UL standards No. 1598.
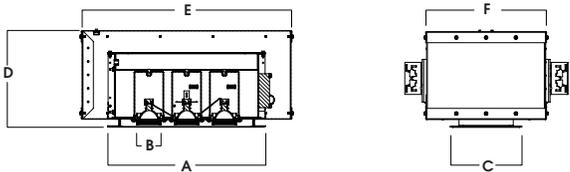
#OF MODULES	APERTURE			H	L	W	CUTOUT
	A	B	C	D	E	F	
1	4.0	2.3	4.0	8.8	8.11	11.3	5.1" x 5.1"
2	8.0	2.3	4.0	8.8	11.72	11.3	5.1" x 8.8"
3	12.0	2.3	4.0	8.8	15.72	11.3	5.1" x 12.8"
4	16.0	2.3	4.0	8.8	19.75	11.3	5.1" x 16.8"

SERIES	LAMPS	TRANSFORMER / VOLTAGE			OPTIONS[1]		INTERIOR		TRIM[4]	FINISHES[5]	
RC44ICLVFT 1 Module	MR16	E_ E_LED	Electronic Driver Transformer for Use with LED MR16 Lamps	1 120V 2 277V	LENS		MWI	White	FT044 4" x 4"	MW[6]	Matte White
		NTR	No Transformer for Remote Transformer Application		GL16	Clear	MBI	Black		MB[6]	Matte Black
RC48ICLVFT 2 Modules					FG16	Frosted	PTI	Platinum		PT[6]	Platinum Silver
					SK16	Linear	BZI	Bronze	FT048 4" x 8"	BZ	Bronze
		GU10	GU10 120V Socket No Transformer		SO16	Solite Diffusion	CCI	Custom Color		CH	Charcoal
RC412ICLVFT 3 Modules					HL16	Hex Louver			FT0412 4" x 12"	GH	Graphite
					SN16	Snoot				SN	Sun Gold
					LN16[2]	Color Lens				AC	Champagne
					OPTIONS				FT0416 4" x 16"	AN	Anodic Natural
RC416ICLVFT 4 Modules					BH27	27" Flat Bar				CN	Caramel
					CB24	24" C-Channel				WF	Matte White Flange
					CB48	48" C-Channel				CC	Custom Color
					MWL(**)	Max Wattage Label					
					RTT150E1	150W Remote Transformer					
					RTT300E1	300W Remote Transformer					
					FS	Fusing					
					PR[3]	Deep Plaster Neck					

EXAMPLE: RC48ICLVFTMR16E1LED/SO16SN16BH27MBI/FT048MW

NOTES:
1 See Product Options Page for Details   2 See Lens Options Page for Details   3 Contact Factory   4 Inside Trim And Flange Will Match Color Specified   5 Contact Factory for Special Finishes   6 Standard Finishes

LED MR16

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.

SPECTRUM LIGHTING INC.

PROJECT:	TYPE:
CAT. NO.:	

WWW.SPECLIGHT.COM • 994 JEFFERSON STREET, FALL RIVER, MA 02721 • 508.678.2303 FAX 508.678.2260

MADE IN THE USA

1601