

8" ROUND LENSED DOWNLIGHT

PROJECT: _____
 QUANTITY: _____ TYPE: _____



SG8IN

APPLICATION

Series features a deep reflector and a wide variety of lenses and splays.

FEATURES

Efficient reflector design with a variety of lens options. Posi-lock reflector attachment. Integral 5/8" (0.625) plaster ring. Maximum wattage label (MWL) for low wattage Incandescent or LED lamps. Tool-less ballast access. Multi-bar adjustable mounting brackets.

TRIM FINISH

Variety of powdercoat and anodized finishes available on trim.

ELECTRONICS


120V Electronic transformer is standard.

CONSTRUCTION

Frame constructed of 20 ga. aluminum. Reflectors spun from .063 high purity aluminum and finished to specification.

CODE COMPLIANCE

ETL listed for damp location. Wet location available. Manufactured and tested to UL Standard No. 1598.

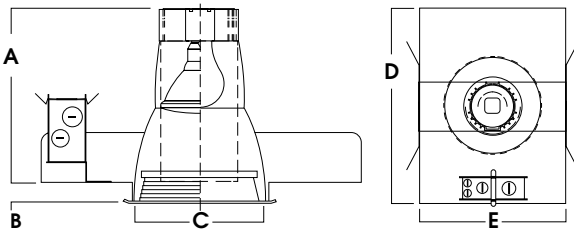

A	B	C	D	E
9.3 235.0 mm	0.9 22.9 mm	7.5 190.5 mm	16.3 412.8 mm	12.0 304.8 mm

PRODUCT SELECTOR GUIDE

SERIES	DIMMING	OPTIONS	BAR HANGERS	TRIM	FINISH	FLANGE FINISH	LENS
SG8IN				AR8125			

EXAMPLE

SG8IN	E1		BH27	AR8125	SG	MF	SO
--------------	----	--	-------------	---------------	----	----	----

HOUSING

MOUNTING OPTIONS

TRIM OPTIONS

SERIES	OPTIONS	BAR HANGERS	TRIM	FINISH	FLANGE FINISH	LENS
SG8IN	CR Corrosion Resistant	BH27 27" Solid Bars H12 12" - 24" Expandable Bars CB24 24" C-Channel Bars	AR8125	SG Semi-Diffuse	MF Matching Flange WF White Flange For Use with Non-White Trim Finish	GL Clear Glass Lens
	TR Top Relamping Option			Low Iridescent		SO Micro Prism Solite™ Lens
				Matte White		NL No Lens
			MB Matte Black			

