



ZEVA
DAMP LOCATION
 CLASSIC SHAPES

PROJECT: _____

QUANTITY: _____ TYPE: _____



ZV1206GV
 PT - Platinum Silver



ZV1206GV
 CO - Copper



ZV1206GV
 MB - Matte Black

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²	ACCESSORIES ³	MOUNTING ⁵	INTERIOR ⁷	FINISH ⁷								
ZV1206GV	15L 1500 Lm	80 CRI	DX DS2W1	1%, 0-10V, 120V/277V ELV/MLV, 120V	MFO ⁴ FJO	2" Frosted Mini 2" Frosted Tall	<table border="1"> <tr> <th colspan="2">WALL MOUNT</th> <td rowspan="2">MWB⁸ CCI FCI</td> <td rowspan="2">Matte White Custom Color Fixture Color Interior</td> <td rowspan="2">MW⁸ MB⁸ PT⁸ CC</td> <td rowspan="2">Matte White Matte Black Platinum Silver Custom Color</td> </tr> <tr> <td>WM</td> <td>Wall Mount</td> </tr> </table>	WALL MOUNT		MWB ⁸ CCI FCI	Matte White Custom Color Fixture Color Interior	MW ⁸ MB ⁸ PT ⁸ CC	Matte White Matte Black Platinum Silver Custom Color	WM	Wall Mount
		WALL MOUNT						MWB ⁸ CCI FCI	Matte White Custom Color Fixture Color Interior					MW ⁸ MB ⁸ PT ⁸ CC	Matte White Matte Black Platinum Silver Custom Color
WM	Wall Mount														
		90 CRI					<table border="1"> <tr> <th colspan="2">CEILING MOUNT</th> <td colspan="4" rowspan="2">Reference Color Sheet Located on Product Webpage for Full List of Available Colors (83-10172)</td> </tr> <tr> <td>RDC5 HM⁶ AT⁶ PM⁶ CD⁶ CM⁶</td> <td>Small Driver Canopy Hang Straight Hang Straight All Thread Rigid Pendant Mount Cord / Cable Mount Cord Mount</td> </tr> </table>	CEILING MOUNT		Reference Color Sheet Located on Product Webpage for Full List of Available Colors (83-10172)				RDC5 HM ⁶ AT ⁶ PM ⁶ CD ⁶ CM ⁶	Small Driver Canopy Hang Straight Hang Straight All Thread Rigid Pendant Mount Cord / Cable Mount Cord Mount
CEILING MOUNT		Reference Color Sheet Located on Product Webpage for Full List of Available Colors (83-10172)													
RDC5 HM ⁶ AT ⁶ PM ⁶ CD ⁶ CM ⁶	Small Driver Canopy Hang Straight Hang Straight All Thread Rigid Pendant Mount Cord / Cable Mount Cord Mount														

EXAMPLE: ZV1206GV15L30KDXMFO/RDC5HM36MWIMB

NOTES:
 1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 Enclosure Required - Choose One Option 4 Standard Enclosure
 5 See Mounting Page for Details on Components and Finishes 6 Specify Length in Inches: See Mounting Page for Available Lengths
 7 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 8 Standard Finishes






ZEVA
DAMP LOCATION
 CLASSIC SHAPES

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
ZV1206GV15L	1500	1106	11	100

¹ Nominal Source Lumens at 35K ² Nominal Delivered Lumens at 35K

HOUSING DIMENSIONS

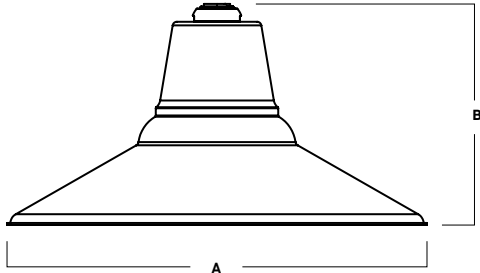

A	B
12.0	6.3
304.8 mm	160.0 mm

APPLICATION

The Zeva Series are a small diameter RLM style shade. Inspired by vintage lighting styling with modern light sources and materials. 1100 delivered lumens [nominal]. The wide range of options for illumination, mounting, enclosures, and finishes allows for creative luminaire specification.

ELECTRONICS

Proprietary solid-state light engine available in various color temperatures. Color quality and consistency of 80 CRI [typical], 3 SDCM. Selection of electronic constant current dimming drivers available. Driver and light engine are field serviceable for future replacement or upgrades. For higher CRI and custom configurations, consult factory.

CONSTRUCTION

Shades are spun in our factory from 0.063 high purity aluminum. Passive aluminum heatsink optimized for emitter life and performance. Die-cast aluminum coupler accepts variety of mounting types. Wall mount canopies are spun aluminum with nickel plated hardware. Wall arms are formed and fabricated 3/8 aluminum pipe. Choice of diffused, evenly illuminated emitter enclosures eliminate direct source visibility and are free from emitter pixelation.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. All exposed materials are chromate pretreated to resist corrosion. Standard and custom finishes are available. Interior is Matte White unless specified

CODE COMPLIANCE

BAA compliant. ETL listed to meet US and Canadian standards. Suitable for dry or damp locations. 5 year limited warranty on all components. Proudly designed and manufactured in Massachusetts.

ENCLOSURES

MFO
2" FROSTED MINI



FJO
2" FROSTED TALL



WALL MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & DIMENSIONS.)

WM
WALL MOUNT



ZV1206GV SHOWN WITH WM

CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM
HANG STRAIGHT / ALL THREAD / PENDANT



ZV1206GV SHOWN WITH RDC5PM

CD
CORD / CABLE MOUNT



ZV1206GV SHOWN WITH RDC5CD

CM
CORD MOUNT



ZV1206GV SHOWN WITH RDC5CM





ZEVA
DAMP LOCATION
 CLASSIC SHAPES / PHOTOMETRIC DATA

ZV1206GV 15L 35K XX MF0 XX MWI

CANDLEPOWER CURVE TEST SP-01142	INTENSITY CANDELA 0° AZIMUTH	ZONAL LUMENS		SINGLE UNIT: PERFORMANCE DIRECT FOOTCANDLES BASED ON DOWNLIGHT ONLY				MULTIPLE UNITS: PERFORMANCE 80/50/20% REFLECTANCES INITIAL FOOTCANDLES AND WATTS PER SQUARE FOOT							
		0° - 10°	32	3%	Mounting Height AFF	FC at Center on Floor	Beam Diameter	FC at Beam Edge	Ceiling Height	Fixture Spacing	RCR 3		RCR 5		
	0°	336	0° - 10°	32	3%	6.5'	8 fc	27.4'	0 fc	12'	6'	21	0.28	12	0.20
	5°	334	0° - 20°	124	11%	7.5'	6 fc	31.6'	0 fc	15'	8'	11	0.14	6	0.10
	15°	326	0° - 30°	266	24%	8.5'	5 fc	35.8'	0 fc	18'	10'	7	0.09	4	0.06
	25°	305	0° - 40°	439	40%	10.0'	3 fc	42.1'	0 fc	Delivered Illuminance Rating: (DIR) 76 FC per W/Sq. Ft. 59 FC per W/Sq. Ft.					
	35°	278	0° - 60°	822	74%	12.0'	2 fc	50.5'	0 fc						
	45°	253	0° - 80°	1,074	97%	14.0'	2 fc	58.9'	0 fc	2' Suspension Length to luminous aperture Square rooms used for multiple units: RCR 3: Length & Width = Ceiling Ht. - 5.5' x 3.33 RCR 5: Length & Width = Ceiling Ht. - 5.5' x 2.00 * Average Footcandles at 2.5' Above Floor					
	55°	223	Downlight	1,095	99%	16.0'	1 fc	67.3'	0 fc						
	90°	4	Total	1,106	100%	20.0'	1 fc	84.2'	0 fc						

Delivered Lumens: **1,106**
 Luminaire Watts: **11**
 LER: **100.55**

CP at 0° (Nadir): **336**
 CRI: **80+**

Beam Angle: **129°**
 Spacing Ratio: **1.29**

Lumen Multiplier: **Only 15L available**
 CCT Multiplier: **27K x 0.97, 30K x 0.99, 40K x 1.03**




MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



WALL MOUNTING

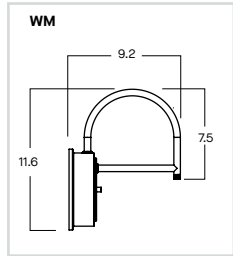

CEILING MOUNTING

<p>RDC5 - SMALL DRIVER CANOPY (STANDARD) MOUNTS TO 4" OCTO J-BOX</p>	<p>HM* HANG STRAIGHT 45° SWIVEL 5/8" OD STEM - 3/8" IP</p> <p>ORDER: HM (Length) SPECIFY LENGTH: HM3 - 3" HM24 - 24" HM6 - 6" HM36 - 36" HM12 - 12" HM48 - 48" HM18 - 18" HM72 - 72" HMLC(XX) Custom Length (Specify in Inches)</p>	<p>PM* RIGID PENDANT MOUNT RIGID 5/8" OD STEM - 3/8" IP</p> <p>ORDER: PM (Length) SPECIFY LENGTH: PM3 - 3" PM24 - 24" PM6 - 6" PM36 - 36" PM12 - 12" PM48 - 48" PM18 - 18" PM72 - 72" PMLC(XX) Custom Length (Specify in Inches)</p>	<p>AT** HANG STRAIGHT ALL THREAD 45° SWIVEL 5/8" OD STEM - 1/4" IP</p> <p>ORDER: AT (Length) SPECIFY LENGTH: AT12 - 12" AT24 - 24" AT36 - 36" AT48 - 48" AT60 - 60" AT72 - 72"</p> <p>FIELD CUT: THREADED PIPE FIELD LENGTH: 18" CUT PIPE COUPLER: 3/4" SHORTER CUT PIPE COUPLER: 3/4" SHORTER SLIP PIPE COUPLER OVER: THREADED PIPE</p>	<p>CD CORD / CABLE MOUNT SJ CORD WITH 1/16 SS CABLE</p> <p>ORDER: CD (Length) SPECIFY LENGTH: CD36 - 36" CD72 - 72" CD144 - 144" CDLC(XX) Custom Length (Specify in Inches)</p>	<p>CM CORD MOUNT SJ CORD WITH STRAIN RELIEF</p> <p>ORDER: CM (Length) SPECIFY LENGTH: CM36 - 36" CM72 - 72" CM144 - 144" CMLC(XX) Custom Length (Specify in Inches)</p>
---	--	---	---	--	--

*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.
**ORDER IN 12" INCREMENTS. ODD SIZES MAY BE FIELD CUT

