



ESPRESSO PENDANTS



ESPRESSO PENDANTS

MINI ESPRESSO PENDANT



ME0713UDGV - DIRECT / INDIRECT
ME0713DGV - DIRECT ONLY



ESPRESSO PENDANT



ME1314UDGV - DIRECT / INDIRECT
ME1314DGV - DIRECT ONLY



ME1816UDGV - DIRECT / INDIRECT
ME1816DGV - DIRECT ONLY

- Styled with a unique hourglass shape that is both functional and decorative.
- Available as a direct downlight or with direct / indirect lighting up to 6000 lumens.
- Our LED systems are best in class and field replaceable for maintenance.

- Fixtures are hand spun in our factory from heavy gauge aluminum for long life durability.
- The choice of interior and exterior powdercoat finishes allows for easy customization.
- Internal diffuser lens obscures LED emitter for visual comfort.



MINI ESPRESSO PENDANTS SPECIFICATION GUIDE

MINI ESPRESSO PENDANTS																			
 ME0713DGV shown with HM					 ME0713DGV shown with CD		 ME0713DGV shown with CM		 ME0713DGV shown with CD3X <small>Direct/Indirect Only Available with CD3X</small>		 ME0713DGV BOTTOM VIEW <small>TF1 Diffuser Standard</small>	 <table border="1"> <thead> <tr> <th>SERIES</th> <th>A</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>ME0713DGV</td> <td>7.5</td> <td>13.0</td> </tr> </tbody> </table>		SERIES	A	B	ME0713DGV	7.5	13.0
SERIES	A	B																	
ME0713DGV	7.5	13.0																	
SERIES	LUMENS ¹		CCT	DRIVER / DIMMING ²		OPTIONS ⁴		MOUNTING ⁵		INTERIOR ⁶		FINISH ⁸							
ME0713DGV	15L	1500 Lm	27K	2700K	EX	Electronic Driver, 120V/277V	DIRECT / INDIRECT 2CIR ⁴ 2 Circuit FS Fusing		RDC5 Small Driver Canopy CP13 Large Driver Canopy CD3X ⁶ 3 Cable Mount with Cord EMCRC ⁷ 10W Canopy Mounted EM EMRM 7W Remote EM EMEN 7W Remote with Enclosure		MW ⁶ Matte White CCI Custom Color FCI Fixture Color Interior		MW ⁶ Matte White MB ⁶ Matte Black PT ⁶ Platinum Silver CC Custom Color						
ME0713DGV	27L	2700 Lm	30K	3000K	DO10X	1%, 0-10V, 120V/277V	DIRECT ONLY FS 2 Circuit		DIRECT ONLY HM ⁶ Hang Straight AT ⁶ Hang Straight All Thread PM ⁶ Rigid Pendant Mount CD ⁶ Cord / Cable Mount CM ⁶ Cord Mount		See Back for Full Range of Color Options 		See Back for Full Range of Color Options 						
ME0713DGV	35K	3500K	35K	3500K	DLTE1 ³	Lutron® 2-Wire Forward Phase (MLV), 120V													
	40K	4000K	40K	4000K	DL3EX ⁹	1%, Lutron® EcoSystem®, Fades to Black, 120V/277V													

NOTES:
 1 Normal Source Lumens at 35K 2 Contact Factory for Additional Options 3 Available with CP13 Only 4 See Product Options Page For Details 5 See Mounting Page for Details on Components and Finishes 6 Specify Length in Inches: See Mounting Page for Available Lengths
 7 EMCRC Replaces RDC5 or CP13 8 See Color Page for More Options/Consult Factory for Special Finishes 9 Standard Finishes

ESPRESSO PENDANT SPECIFICATION GUIDE

ESPRESSO PENDANTS																						
 ME1314DGV shown with HM					 ME1314DGV shown with CD		 ME1314DGV shown with CM		 ME1314DGV shown with CD3X <small>Direct/Indirect Only Available with CD3X</small>		 ME1314DGV BOTTOM VIEW	 <table border="1"> <thead> <tr> <th>SERIES</th> <th>A</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>ME1314DGV</td> <td>13.9</td> <td>14.4</td> </tr> <tr> <td>ME1816DGV</td> <td>16.7</td> <td>18.1</td> </tr> </tbody> </table>		SERIES	A	B	ME1314DGV	13.9	14.4	ME1816DGV	16.7	18.1
SERIES	A	B																				
ME1314DGV	13.9	14.4																				
ME1816DGV	16.7	18.1																				
SERIES	LUMENS ¹		CCT	DRIVER / DIMMING ²		DIFFUSER ³		OPTIONS ⁴		MOUNTING ⁵		INTERIOR ⁷		FINISH ⁸								
ME1314DGV	UPLIGHT		27K	2700K	EX	ENCLOSURES		DIRECT / INDIRECT ONLY 2CIR ⁴ 2 Circuit FS Fusing		RDC5 Small Driver Canopy CP13 Large Driver Canopy CD3X ⁶ 3 Cable Mount with Cord EMCRC ⁷ 10W Canopy Mounted EM EMRM 7W Remote EM EMEN 7W Remote with Enclosure		MW ⁶ Matte White CCI Custom Color FCI Fixture Color Interior		MW ⁶ Matte White MB ⁶ Matte Black PT ⁶ Platinum Silver CC Custom Color								
ME1816DGV	Direct/Indirect Only		30K	3000K	DO10X	TF2	4" Frosted Dome (Standard)	DIRECT ONLY FS 2 Circuit		DIRECT ONLY HM ⁶ Hang Straight AT ⁶ Hang Straight All Thread PM ⁶ Rigid Pendant Mount CD ⁶ Cord / Cable Mount CM ⁶ Cord Mount		See Back for Full Range of Color Options 		See Back for Full Range of Color Options 								
ME1314DGV	15L	1500 Lm	35K	3500K	DLTE1	DOORS & LENSES																
ME1816DGV	27L	2700 Lm	40K	4000K	DL3EX	DR Door (See Individual Specification Sheets for Ordering Details)																
ME1816DGV	37L	3700 Lm	50K	5000K																		
ME1314DGV	DOWNLIGHT																					
ME1816DGV	15L	1500 Lm																				
	27L	2700 Lm																				
	37L	3700 Lm																				
	55L	5500 Lm																				

NOTES:
 1 Normal Source Lumens at 35K 2 Contact Factory for Additional Options 3 TF2 Enclosure or Door & Lens Required - Choose One Option 4 See Product Options Page For Details 5 See Mounting Page for Details on Components and Finishes 6 Specify Length in Inches: See Mounting Page for Available Lengths 7 See Color Page for More Options/Consult Factory for Special Finishes 8 Standard Finishes

1. CHOOSE FIXTURE & EMITTER TYPE ME1314DGV	2. CHOOSE APPLICATION: OUTPUT, CCT, DRIVER & DIFFUSER 15L 35K EX TF2	3. CHOOSE MOUNTING & COLOR PM12 MBI SN	
FULL EXAMPLE: ME1314DGV15L35KEXTF2PM12LGI MW			

COLOR OPTIONS - POWDER COAT PAINT FINISHES


NOTE: NO PRINTED IMAGE CAN EQUAL THE EXACT COLOR OF FINISH ON METAL. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION.



TIER 1 STANDARD FINISHES




TIER 2 TYPICAL FINISHES

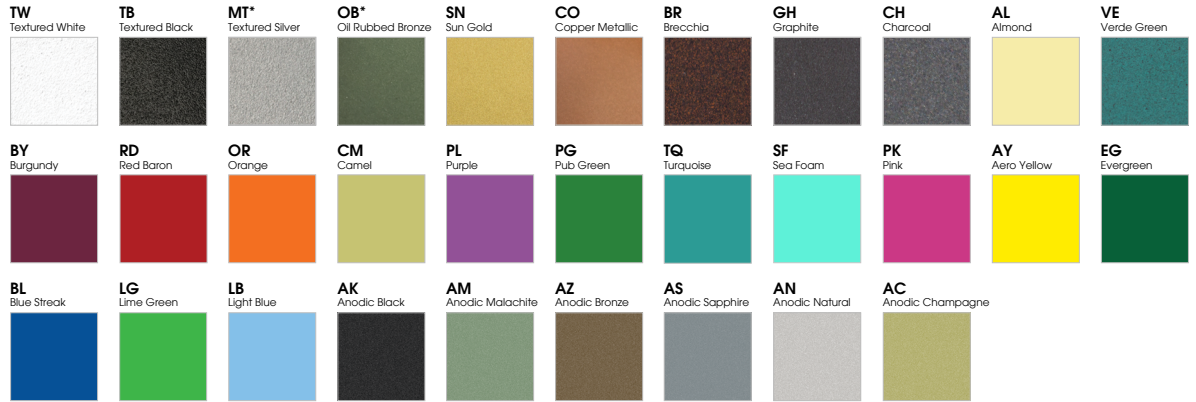

TIER 3 - SPECIAL METAL FINISHES



TIER 4 - TRI-COAT FINISHES ONLY AVAILABLE ON MINI ESPRESSO

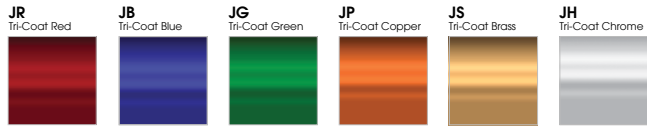

CUSTOM COLOR FINISHES


CONTACT FACTORY
CC Custom Color



*UNAVAILABLE FOR WET LOCATION

MINI ESPRESSO DIRECT PHOTOMETRIC DATA

ME0713DGV-27L35K-EX-MWI

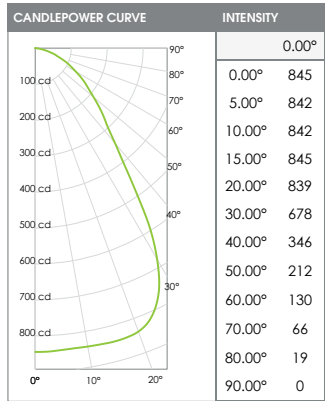


Delivered Lumens: 1,494 CP at 0deg (Nadir): 845
Luminaire Watts: 18 CRI: 80+
LER: 83.00

LUMENS / WATTAGE DATA		
PART NUMBER	DELIVERED LUMENS ¹	SYSTEM WATTS
ME0713DGV15L	854	10
ME0713DGV27L	1494	18

¹ Nominal Delivered Lumens at 35K

MINI ESPRESSO DIRECT / INDIRECT PHOTOMETRIC DATA

ME0713UDGV-27L27L35K-EX-MWI

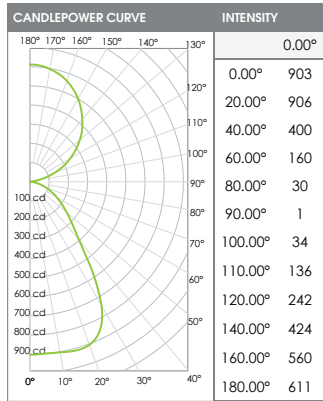


Delivered Lumens: 3,326 CP at 0deg (Nadir): 903
Luminaire Watts: 36 CRI: 80+
LER: 92.39

LUMENS / WATTAGE DATA		
PART NUMBER	DELIVERED LUMENS ¹	SYSTEM WATTS
ME0713UDGV15L15L	1896	20
ME0713UDGV27L27L	3326	36

¹ Nominal Delivered Lumens at 35K

ESPRESSO DIRECT PHOTOMETRIC DATA

ME1314DGV-55L35K-EX-TF2

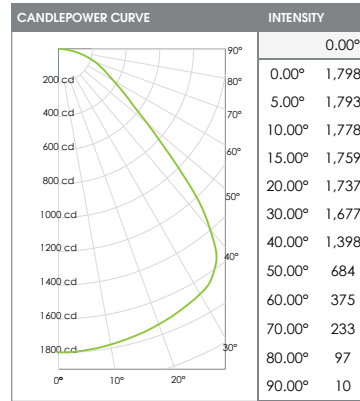


Delivered Lumens: 4,205 CP at 0deg (Nadir): 1,798
Luminaire Watts: 39 CRI: 80+
LER: 107.82

LUMENS / WATTAGE DATA		
PART NUMBER	DELIVERED LUMENS ¹	SYSTEM WATTS
ME1314DGV15L	1135	10
ME1314DGV27L	1934	18
ME1314DGV37L	2859	26
ME1314DGV55L	4205	30

¹ Nominal Delivered Lumens at 35K

ESPRESSO DIRECT / INDIRECT PHOTOMETRIC DATA

ME1314UDGV-37LGL-55LTF2-35K-EX-MWI

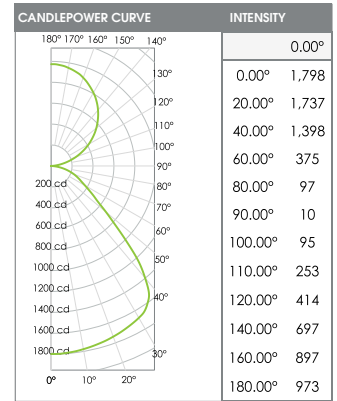

Delivered Lumens: 6,905 CP at 0deg (Nadir): 1,798
Luminaire Watts: 65 CRI: 80
LER: 106.23

LUMENS / WATTAGE DATA		
PART NUMBER	DELIVERED LUMENS ¹	SYSTEM WATTS
ME1314UDGV15L15L	2179	20
ME1314UDGV27L27L	3774	36
ME1314UDGV37L37L	5550	52
ME1314UDGV37L55L	6905	65

¹ Nominal Delivered Lumens at 35K

ELECTRONICS

LED system features high brightness white LED's, 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Matte White interior standard. Custom Color interior finishes available.

CODE COMPLIANCE

BAA compliant. ETL certified to meet American and Canadian standards. Manufactured and tested to UL standards No. 1598/8750. Suitable for dry or damp locations. IES files available online.

