



**PENDANT MOUNT
MINI CONCORDIA**
DAMP / WET LOCATION
TIERS

PROJECT: _____
 QUANTITY: _____ TYPE: _____



CN1308GV
AC - Anodic Natural



CN1308GV
AC - Anodic Champagne



CN1308GV
MB - Matte Black



CN1308GV
BR - Breccia

SERIES	LUMENS ¹	CCT	DRIVER / DIMMING ²	ACCESSORIES	MOUNTING ³	FINISH ⁷	WET KIT
CN1308GV	15L 1500 Lm	80 CRI	EX Electronic Driver, 120V/277V DS2W1 ELV/MLV, 120V DO10X 1%, 0-10V, 120V/277V	FJO 2" Frosted Tall	RDC5 ⁴ Small Driver Canopy HM ⁵ Hang Straight AT ⁵ Hang Straight All Thread PM ⁵ Rigid Pendant Mount CD ⁵ Cord / Cable Mount CM ⁵ Cord Mount EMCR ⁶ 10W Large Driver Canopy EM EMRM 7W Remote EM EMEN 7W Remote with Enclosure	MW ⁸ Matte White MB ⁸ Matte Black PT ⁸ Platinum Silver CC Custom Color	WLKA Wet Location Kit
		27K 2700K 30K 3000K 35K 3500K 40K 4000K					
		90 CRI					
		27HK 2700K 30HK 3000K 35HK 3500K 40HK 4000K					

EXAMPLE: CN1308GV15L35KEXFJO/RDC5PM36CO

NOTES:
 1 Nominal Source Lumens at 35K 2 Contact Factory for Additional Options 3 See Mounting Page for Details on Components and Finishes 4 Required for All Drivers
 5 Specify Length in Inches: See Mounting Page for Available Lengths 6 EMCR Replaces RDC5 7 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 8 Standard Finishes






**PENDANT MOUNT
MINI CONCORDIA**
DAMP / WET LOCATION
TIERS

LUMENS / WATTAGE DATA				
PART NUMBER	SOURCE LUMENS ¹	DELIVERED LUMENS ²	SYSTEM WATTS	LPW
CN1308GV15L	1500	605	10	61

¹ Nominal Source Lumens at 35K ² Nominal Delivered Lumens at 35K

HOUSING DIMENSIONS

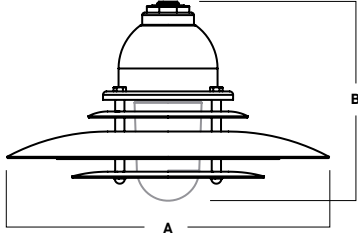

A	B
13.0 330.2 mm	7.8 199.1 mm

APPLICATION

The Pendant Mount Mini Concordia is one of our most elegant RLM styles. GV Series is designed for damp or dry locations.

FEATURES

Spectrum Lighting's RLM Classics are reproductions of Classic lighting fixtures reimagined with modern LED light sources and materials. The wide range of options for illumination, mounting and finishes allows for creative fixture specification and design. Fixture may be pendant mounted. LED module and driver are serviceable for future replacement.

FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. Variety of standard and custom finishes are available. Interior painted same finish as exterior.

ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3-step MacAdam Ellipse binning. Standard CRI: 80+. Higher CRI, R9 and custom LED configurations are available; consult factory. Choice of electronic 120V/277V and dimming drivers.

CONSTRUCTION

Fixture shades are spun in our factory from 0.063 high purity aluminum. Mounting hub is die-cast aluminum.

CODE COMPLIANCE

BAA compliant. ETL certified to meet US and Canadian standards. Suitable for dry or damp locations. Manufactured and tested to UL standards No. 1598/8750.

CEILING MOUNT

(SEE MOUNTING PAGES FOR MORE OPTIONS & CANOPY DIMENSIONS.)

HM / AT / PM

HANG STRAIGHT / ALL THREAD / PENDANT



CN1308GV SHOWN WITH RDC5PM

CD

CORD / CABLE MOUNT



CN1308GV SHOWN WITH RDC5CD

CM

CORD MOUNT



CN1308GV SHOWN WITH RDC5CM



MOUNTING & ACCESSORIES

SOME OPTIONS NOT AVAILABLE ON ALL FIXTURES, CONSULT SPECIFICATION SHEETS. SEE INDIVIDUAL SPECIFICATION SHEETS OR CONSULT FACTORY FOR ADDITIONAL INFORMATION. NOTE: THIS IS TYPICAL OF RLM SPECIFICATION FOR MOUNTING. INDIVIDUAL FIXTURES OR PROJECTS MAY HAVE SPECIALIZED REQUIREMENTS.



CEILING MOUNTING

<p>RDC5 - SMALL DRIVER CANOPY (STANDARD) MOUNTS TO 4" OCTO J-BOX</p>	<p>HM* HANG STRAIGHT 45° SWIVEL 5/8" OD STEM - 3/8" IP</p> <p>ORDER: HM (Length) SPECIFY LENGTH: HM3 - 3" HM24 - 24" HM6 - 6" HM36 - 36" HM12 - 12" HM48 - 48" HM18 - 18" HM72 - 72" HMLC(XX) Custom Length (Specify in Inches)</p>	<p>PM* RIGID PENDANT MOUNT RIGID 5/8" OD STEM - 3/8" IP</p> <p>ORDER: PM (Length) SPECIFY LENGTH: PM3 - 3" PM24 - 24" PM6 - 6" PM36 - 36" PM12 - 12" PM48 - 48" PM18 - 18" PM72 - 72" PMLC(XX) Custom Length (Specify in Inches)</p>	<p>AT** HANG STRAIGHT ALL THREAD 45° SWIVEL 5/8" OD STEM - 1/4" IP</p> <p>ORDER: AT (Length) SPECIFY LENGTH: AT12 - 12" AT24 - 24" AT36 - 36" AT48 - 48" AT60 - 60" AT72 - 72"</p>	<p>CD CORD / CABLE MOUNT SJ CORD WITH 1/16 SS CABLE</p> <p>ORDER: CD (Length) SPECIFY LENGTH: CD36 - 36" CD72 - 72" CD144 - 144" CDLC(XX) Custom Length (Specify in Inches)</p>	<p>CM CORD MOUNT SJ CORD WITH STRAIN RELIEF</p> <p>ORDER: CM (Length) SPECIFY LENGTH: CM36 - 36" CM72 - 72" CM144 - 144" CMLC(XX) Custom Length (Specify in Inches)</p>
---------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

*MAXIMUM ONE PIECE STEM LENGTH IS 72". **MAXIMUM ONE PIECE STEM LENGTH IS 36". LONGER LENGTHS ARE POSSIBLE USING MULTIPLE STEMS AND COUPLERS.
**ORDER IN 12" INCREMENTS, ODD SIZES MAY BE FIELD CUT

EMERGENCY BATTERY OPTIONS

EMCR - LARGE DRIVER CANOPY FOR 10W EMERGENCY BATTERY
(FOR ROUND CEILING MOUNT TYPES)

REMOTE EMERGENCY BATTERY OPTIONS

<p>EMRM* - 7W REMOTE EMERGENCY BATTERY (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>1.3</td> <td>12.6</td> <td>13.0</td> </tr> </tbody> </table>	A	B	C	1.3	12.6	13.0	<p>EMEN* - 7W REMOTE EMERGENCY BATTERY WITH ENCLOSURE (50' MAX)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>2.0</td> <td>17.0</td> <td>6.2</td> </tr> </tbody> </table>	A	B	C	2.0	17.0	6.2
A	B	C											
1.3	12.6	13.0											
A	B	C											
2.0	17.0	6.2											

*OTHER EM BATTERY SIZES AVAILABLE, CONTACT FACTORY.

