




# 13" ROUND SURFACE DRUM

GV SERIES / 3700 LUMENS

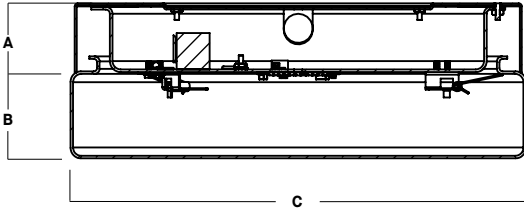

A	B	C
2.07	2.58	13.75
52.58 mm	65.53 mm	349.3 mm

PROJECT: \_\_\_\_\_

QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

## DRM1303LEDGV

### APPLICATION

13" surface round light for area illumination.

### FEATURES

Speclume series fixtures offer contemporary style with functional luminaire performance. Fixtures designed and manufactured in our factory. Fixture produces horizontal and vertical illumination. Reflective gloss white reflector behind LED for enhanced light output. Interchangeable LED module for ease of maintenance.

### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. All exposed materials are chromate pretreated to resist corrosion.

### ELECTRONICS

GV LED system features high brightness white Samsung LED's. 3 step MacAdam Ellipses binning. Standard CRI: 85+. Variety of electronic 120v/277v and dimming drivers.

### CONSTRUCTION

Fixtures are spun in our factory from .063 high purity aluminum. Passive aluminum heatsink for optional thermal management. Formed UV stabilized opal acrylic diffuser.

### CODE COMPLIANCE

BAA Compliant. ETL listed for damp locations. Manufactured and tested to UL standards No. 1598/8750.

WATTAGE / LUMENS DATA		
PART NUMBER	SOURCE LUMENS <sup>1</sup>	SYSTEM WATTS
DRM1303LEDGV15L	1500	11.3
DRM1303LEDGV27L	2700	20.3
DRM1303LEDGV37L	3700	27.1

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING <sup>2</sup>	OPTIONS <sup>3</sup>	MOUNTING	DIFFUSER	FINISH <sup>6</sup>							
DRM1303LEDGV	15L	1500 Lm	EX DS2W1	Electronic Driver 2 Wire Phase Dimming, 120V	FS GS USR	Fuse Holder and Fuse Ceiling Level Gasket Universal IR Motion/ Light Sensor	WM HM <sup>4</sup> PM <sup>4</sup> SM	Wall Mount Hang Straight Pendant Mount Surface Mount	OP POP	White Opal Acrylic White Opal Polycarbonate	MW <sup>6</sup> MB <sup>6</sup> PT <sup>6</sup> CC	Matte White Matte Black Platinum Silver Custom Color		
	27L	2700 Lm											27K	3000K
	37L	3700 Lm											35K	3500K
													40K	4000K

**EXAMPLE:** DRM1303LEDGV15L35KEX/SM/OPMW

**NOTES:**  
 1 Nominal Source Lumens 2 Contact Factory for Additional Options 3 See Product Options Page For Details 4 Specify Length in Inches: See Mounting Page for Available Lengths 5 Reference Color Sheet Located on Product Webpage for Full List of Available Colors 6 Standard Finishes

